
SPECIFICATIONS

Compact Four-way Cassette

Model			MI2-05Q4CDHN18(At)	MI2-07Q4CDHN18(At)	MI2-09Q4CDHN18(At)	MI2-12Q4CDHN18(At)
Power supply			1-phase, 220-240V, 50/60Hz			
Cooling[1]	Capacity	kW	1.5	2.2	2.8	3.6
		kBtu/h	5.0	7.0	9.0	12.0
	Power input	W	14	14	16	18
Heating[2]	Capacity	kW	1.8	2.4	3.2	4.0
		kBtu/h	6.0	8.0	10.0	13.0
	Power input	W	14	14	16	18
Air flow rate[3]		m^3/h	470/441/406/380/349/315/293		542/506/477/444/409/374/341	517/484/449/417/383/348/315
Sound pressure level[4]		dB(A)	30/29.3/28.7/28/27.3/26.7/26		32/31/30/29/28/27/26	32/31/30/29/28/27/26
Main body	Net dimensions[5] (WxHxD)	mm	575×240×575			
	Packed dimensions (WxHxD)	mm	670x285x670			
	Net/Gross weight	kg	13/15.5			14/16.5
Panel	Net dimensions6 (WxHxD)	mm	620x65x620			
	Packed dimensions (WxHxD)	mm	680x80x665			
	Net/Gross weight	kg	2.3/3.0			
Refrigerant type			R410A/R32			
Pipe connections	Liquid/Gas pipe	mm	Ø6.35/Ø12.7			
	Drain pipe	mm	OD Ø25			

Model			MI2-15Q4CDHN18(At)	MI2-18Q4CDHN18(At)	MI2-21Q4CDHN18(At)
Power supply			1-phase, 220-240V, 50/60Hz		
Cooling[1]	Capacity	kW	4.5	5.6	6.3
		kBtu/h	15.0	18.0	21.0
	Power input	W	25	35	50
Heating[2]	Capacity	kW	5.0	6.3	7.1
		kBtu/h	17.0	21.0	24.0
	Power input	W	25	35	50
Air flow rate[3]		m^3/h	650/608/569/526/484/444/405	794/741/692/641/591/540/490	901/848/790/736/678/623/569
Sound pressure level[4]		dB(A)	36.5/35.1/33.7/32.3/30.8/29.4/28	40/38.7/37.3/36/34.7/33.3/32	43/41.4/39.8/38.3/36.7/35.1/33.5
Main body	Net dimensions[5] (WxHxD)	mm	575×240×575		
	Packed dimensions (WxHxD)	mm	670x285x670		
	Net/Gross weight	kg	14/16.5	15/17.5	
Panel	Net dimensions6 (WxHxD)	mm	620x65x620		
	Packed dimensions (WxHxD)	mm	680x80x665		
	Net/Gross weight	kg	2.3/3.0		
Refrigerant type			R410A/R32		
Pipe connections	Liquid/Gas pipe	mm	Ø6.35/Ø12.7		Ø9.52/Ø15.9
	Drain pipe	mm	OD Ø25		

Notes:
1. Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
2. Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
3. Air flow rate are from the highest speed to the lowest speed, total 7 rates for each model.
4. Sound pressure level is from highest level to lowest level, total 7 levels for each model. Sound pressure level is measured 1.5m below the unit in an anechoic chamber.
5. The dimension is only the body size, excluding the size of the installation lug, connecting copper pipe, etc. For detailed dimensions, please refer to the installation manual.
6. Exposed height of the panel after being installed on the ceiling.

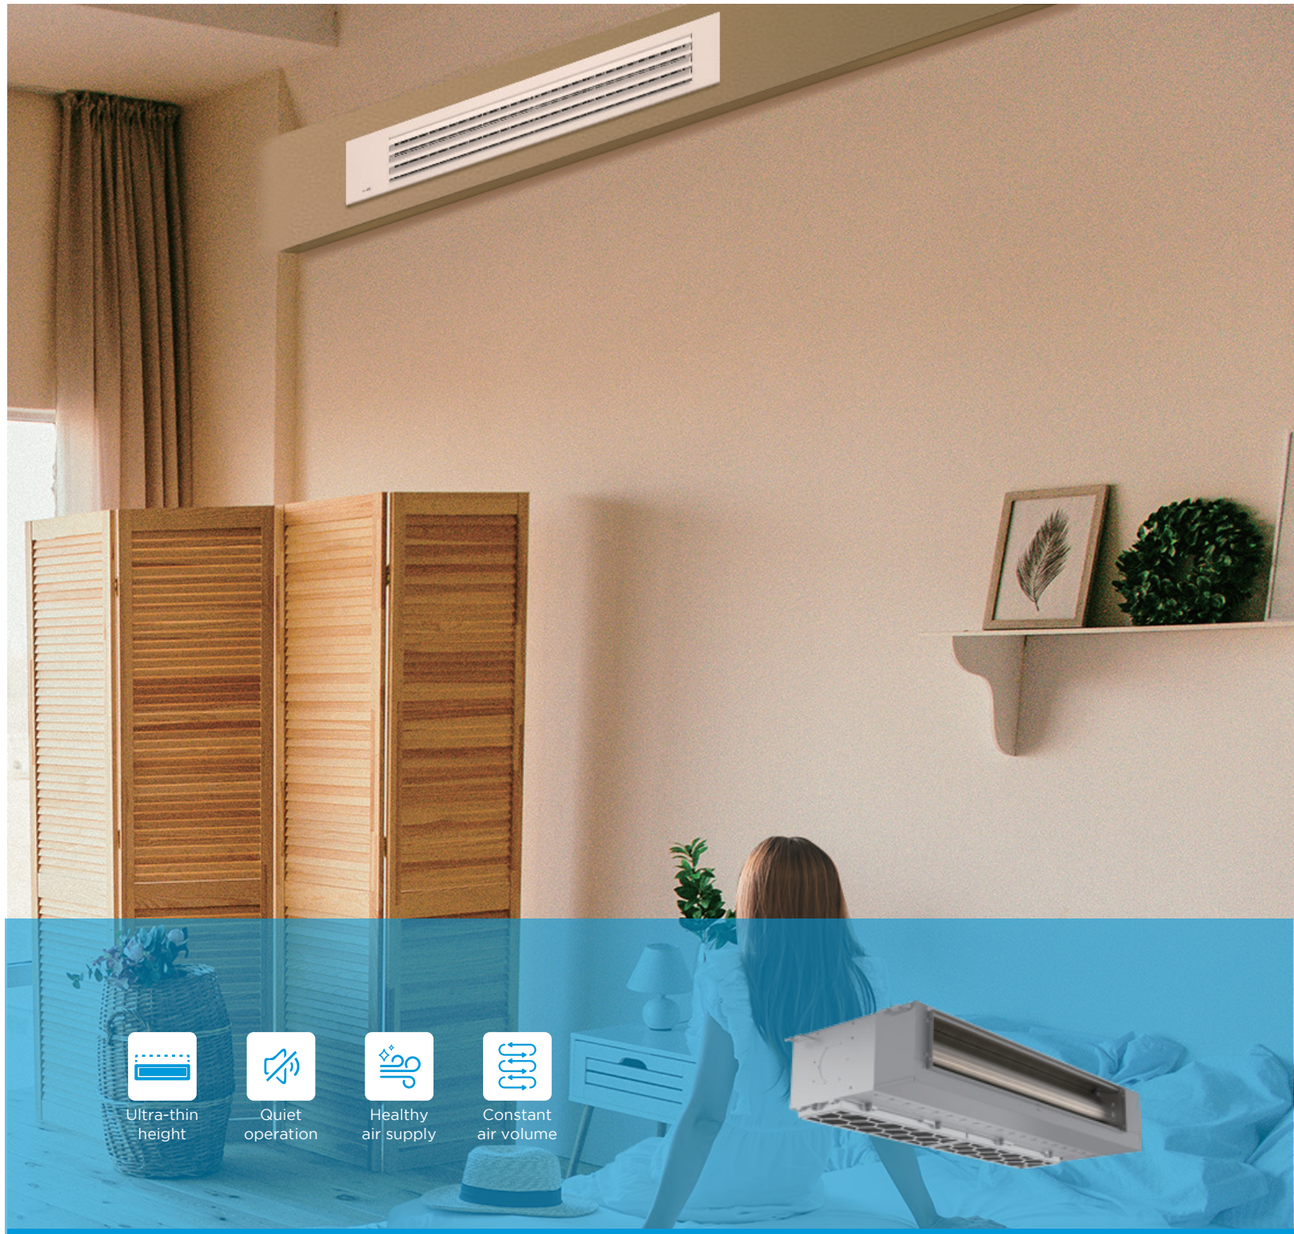

Duct

