


## 1 Board structure

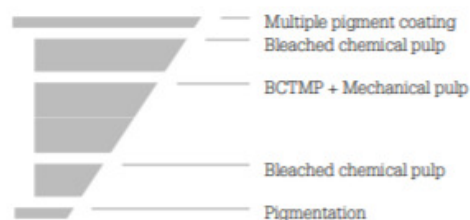

|                        | % of total board | +/- in % of total |
|------------------------|------------------|-------------------|
| <b>Virgin fibre</b>    | 90               | 5                 |
| <b>Pigment coating</b> | 10               | 5                 |
| <b>Total</b>           | 100              |                   |

## 2 Technical specifications

| Grammage | Caliper | Stiffness |           |                         |              |              |
|----------|---------|-----------|-----------|-------------------------|--------------|--------------|
|          |         | L&W 5° md | L&W 5° cd | L&W                     | Taber 15° md | Taber 15° cd |
|          |         | mNm       | mNm       | $\sqrt{[md \times cd]}$ | mNm          | mNm          |
| 215      | 340     | 15.0      | 7.6       | 10.7                    | 7.7          | 3.6          |
| 230      | 370     | 18.4      | 9.5       | 13.2                    | 9.8          | 4.9          |
| 245      | 400     | 22.0      | 11.5      | 15.9                    | 11.9         | 6.0          |
| 265      | 440     | 28.5      | 14.3      | 20.2                    | 15.0         | 7.6          |
| 275      | 460     | 32.0      | 15.8      | 22.5                    | 16.7         | 8.5          |
| 290      | 490     | 37.0      | 18.6      | 26.2                    | 19.7         | 10.0         |
| 305      | 520     | 41.6      | 21.4      | 29.8                    | 22.7         | 11.6         |
| 325      | 560     | 49.0      | 25.2      | 35.1                    | 27.4         | 14.1         |
| 350      | 615     | 60.0      | 31.5      | 43.5                    | 34.1         | 17.6         |
| 375      | 670     | 73.0      | 39.0      | 53.4                    | 41.9         | 21.6         |
| 400      | 725     | 88.2      | 46.7      | 64.2                    | 50.8         | 26.3         |
| 425      | 780     | 105.5     | 55.7      | 76.7                    | 60.8         | 31.4         |
| 450      | 840     | 125.0     | 65.1      | 90.2                    | 71.8         | 37.1         |

| Property                   | Value | Tolerances                | Test standard |
|----------------------------|-------|---------------------------|---------------|
| Brightness top (% Elrepho) | 90    | - 1                       | ISO 2470-2    |
| Smoothness PPS top (µm)    | 1.0   | ≤ 1.4                     | ISO 8791-4    |
| Gloss 75° (%)              | > 45  |                           | ISO 8254      |
| Chromaticity Top L*        | 92.5  | +/- 1.0                   | ISO 5631-2    |
| Chromaticity Top a*        | 2.0   | +/- 1.0                   |               |
| Chromaticity Top b*        | -6.0  | +/- 2.0                   |               |
| Grammage (g/m²)            |       | +/- 2%                    | EN ISO 536    |
| Caliper (µm)               |       | +/- 5%, > 350 g/m² +/- 3% | EN 20534      |
| Stiffness (mNm)            |       | - 15%¹                    | DIN 53121     |
| Testing climate            | 23°C  | +/- 1°C                   | EN ISO 186    |
|                            | 50%   | +/- 2% rh                 |               |