


FICHE TECHNIQUE:

SBS CARTON COUCHE

Carton graphique pure cellulose avec un couchage pigmenté léger sur le verso

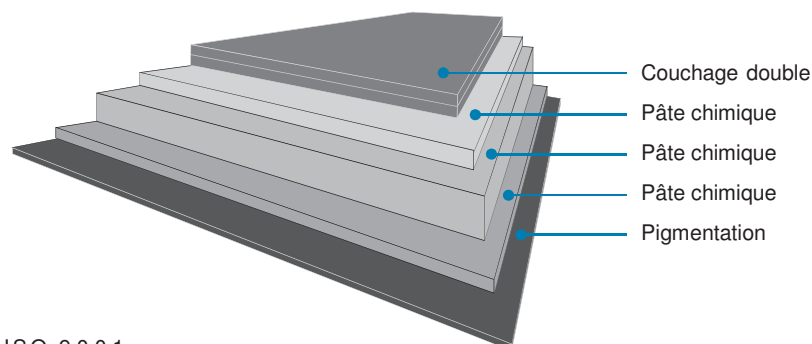

ISO 9001

Spécifications techniques :

Propriété / unité	Tolérance											Normes
Grammage, g/m ²	± 4 %	170	190	210	230	250	275	300	330	350	380	ISO 536
Épaisseur, µm	± 4 %	170	200	230	270	300	330	365	415	445	485	ISO 534
Rigidité DIN 5° SM, mNm	- 15 %	4.3	6.4	8.9	13.6	17.9	23.0	31.9	42.5	49.3	62.9	ISO 2493
Rigidité DIN 5° ST, mNm	- 15 %	2.1	3.0	4.3	6.4	8.5	11.1	15.3	20.4	23.0	29.8	
Moment de flexion Taber 15° SM, mNm	- 15 %	2.4	3.6	5.1	7.7	10.1	13.0	18.1	24.2	28.0	35.7	
Moment de flexion Taber 15° ST, mNm	- 15 %	1.2	1.7	2.4	3.6	4.8	6.3	8.7	11.6	13.0	16.9	
Rigidité L&W 15° SM, mN	- 15 %	50	75	105	160	210	270	375	500	580	740	
Rigidité L&W 15° ST, mN	- 15 %	25	35	50	75	100	130	180	240	270	350	
Humidité, %		6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5	ISO 287
Blancheur, ISO %, Recto		95	95	95	95	95	95	95	95	95	95	ISO 2470
Blancheur, ISO %, Verso		93	93	93	93	93	93	93	93	93	93	
Blancheur CIE, D65/10°, Recto		125	125	125	125	125	125	125	125	125	125	ISO 11475
Blancheur CIE, D65/10°, Verso		121	121	121	121	121	121	121	121	121	121	
L*, Recto		97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	SCAN-P72
a*, Recto		2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	
b*, Recto		-7.1	-7.1	-7.1	-7.1	-7.1	-7.1	-7.1	-7.1	-7.1	-7.1	
Lissé de surface PPS 10, µm, Recto	max 1.4	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	ISO 8791-4
Lissé de surface PPS 10, µm, Verso		<4.0	<4.0	<4.0	<4.0	<4.0	<4.0	<5.0	<5.0	<5.0	<5.0	
Rugosité de surface Bendtsen, ml/min,		20	20	20	20	20	20	20	20	20	20	ISO 8791-2
Rugosité de surface Bendtsen, ml/min,		<100	<100	<100	<200	<200	<200	<200	<300	<300	<400	
Scott Bond, J/m ²		220	220	220	220	220	220	220	220	220	220	TAPPI 569
Brillance 75°, %		48	48	48	48	48	48	48	48	48	48	ISO 8254-1