

UNCONTROLLED DOCUMENT

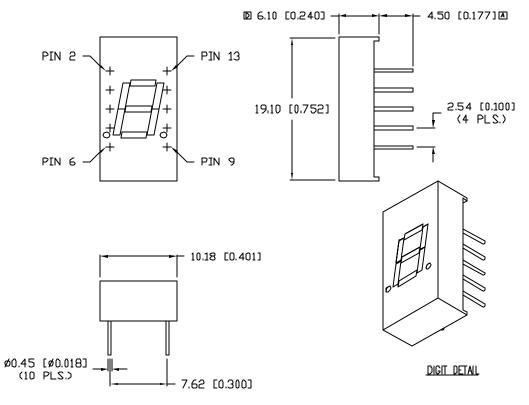

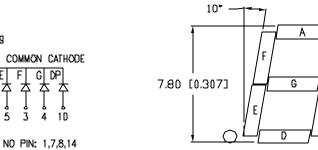

PART NUMBER LDS-C302RI

REV.

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E.C.N. #10387.	10.27.97
В	E.C.N. #10BRDR, & REDRAWN IN 3D.	1.18.03
С	E.C.N. #11153.	7.26.04
D	E.C.N. #11193.	12.07.04

ELECTRO-OPTICAL CHARACTERISTICS TA=25°C If=10mA						
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND	
PEAK WAVELENGTH		565		nm		
FORWARD VOLTAGE		2.2	2.6	V_{f}		
REVERSE VOLTAGE	5.0			٧r	I _r =100μΑ	
AXIAL INTENSITY		3500		Jucd	I _f =10mA	
EMITTED COLOR:	GREEN					
FAGE CΩLOR:	GRAY					
SEGMENT COLOR:	MILKY W	HITE DIFFU	SED			

LIMITS OF SAFE OPERATION AT 25°C PER CHIP

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	25	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.6	mW/ ' C
OPERATING, STORAGE TEMP.	- 30 TO +85	' C
SOLDERING TEMP.	+ 260	' C
2.0mm FROM BODY		3 SEC. MAX

* t<10µS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECINAL PRECISION MAX.= +0.00 MAX

PART NUMBER
D LDS-C302RI

C

Ţ

13 12 11 Б

0.30" SEVEN SEGMENT, LED DISPLAY, COMMON CATHODE, 565nm GREEN CHIPS, GRAY FACE WITH WHITE SEGMENTS.

Confidential information

The information contained in this document is the property of lumex ing. Except as specifically authorazed in writing by lunicx inc., the halder of this document shall keep all information contained herein confidential and shall protect same in whole or in part from disclusive and dissemnation to all third parties.

RELIABLITY NOTE
OUR NAMY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT
SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.
PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com

US WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 5.9.97
PAGE: 1 OF 1
BC SCALE: N/A