




# Adafruit ESP32-S2 TFT Feather

Created by Kattni Rembor

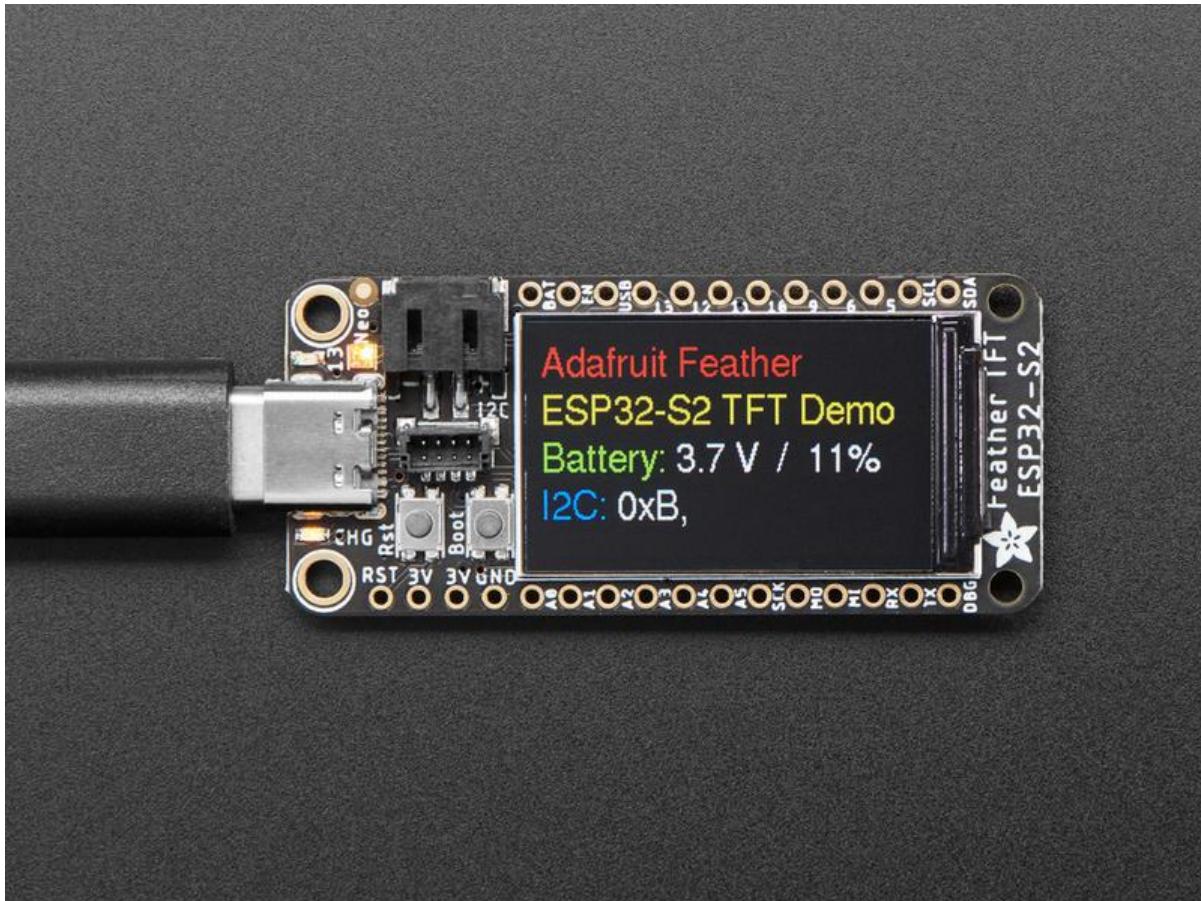

<https://learn.adafruit.com/adafruit-esp32-s2-tft-feather>

Last updated on 2022-06-06 10:46:10 AM EDT

# Table of Contents

<a href="#">Overview</a>	<a href="#">9</a>
<a href="#">Pinouts</a>	<a href="#">13</a>
• <a href="#">Power</a>	<a href="#">14</a>
• <a href="#">TFT Display</a>	<a href="#">15</a>
• <a href="#">ESP32-S2 WiFi Module</a>	<a href="#">15</a>
• <a href="#">BME280 Temperature, Humidity and Pressure Sensor</a>	<a href="#">16</a>
• <a href="#">Logic Pins</a>	<a href="#">17</a>
• <a href="#">NeoPixel and Red LED</a>	<a href="#">19</a>
• <a href="#">STEMMA QT</a>	<a href="#">20</a>
• <a href="#">Buttons</a>	<a href="#">20</a>
• <a href="#">Debug</a>	<a href="#">21</a>
<a href="#">CircuitPython</a>	<a href="#">21</a>
• <a href="#">CircuitPython Quickstart</a>	<a href="#">22</a>
<a href="#">Installing the Mu Editor</a>	<a href="#">24</a>
• <a href="#">Download and Install Mu</a>	<a href="#">24</a>
• <a href="#">Starting Up Mu</a>	<a href="#">25</a>
• <a href="#">Using Mu</a>	<a href="#">25</a>
<a href="#">The CIRCUITPY Drive</a>	<a href="#">26</a>
<a href="#">Creating and Editing Code</a>	<a href="#">27</a>
• <a href="#">Creating Code</a>	<a href="#">27</a>
• <a href="#">Editing Code</a>	<a href="#">29</a>
• <a href="#">Back to Editing Code...</a>	<a href="#">30</a>
• <a href="#">Naming Your Program File</a>	<a href="#">31</a>
<a href="#">Exploring Your First CircuitPython Program</a>	<a href="#">31</a>
• <a href="#">Imports &amp; Libraries</a>	<a href="#">32</a>
• <a href="#">Setting Up The LED</a>	<a href="#">32</a>
• <a href="#">Loop-de-loops</a>	<a href="#">33</a>
• <a href="#">What Happens When My Code Finishes Running?</a>	<a href="#">33</a>
• <a href="#">What if I Don't Have the Loop?</a>	<a href="#">34</a>
<a href="#">Connecting to the Serial Console</a>	<a href="#">34</a>
• <a href="#">Are you using Mu?</a>	<a href="#">35</a>
• <a href="#">Serial Console Issues or Delays on Linux</a>	<a href="#">36</a>
• <a href="#">Setting Permissions on Linux</a>	<a href="#">36</a>
• <a href="#">Using Something Else?</a>	<a href="#">37</a>
<a href="#">Interacting with the Serial Console</a>	<a href="#">37</a>
<a href="#">The REPL</a>	<a href="#">40</a>
• <a href="#">Entering the REPL</a>	<a href="#">41</a>
• <a href="#">Interacting with the REPL</a>	<a href="#">42</a>
• <a href="#">Returning to the Serial Console</a>	<a href="#">44</a>
<a href="#">CircuitPython Libraries</a>	<a href="#">45</a>
• <a href="#">The Adafruit Learn Guide Project Bundle</a>	<a href="#">46</a>

• The Adafruit CircuitPython Library Bundle	48
• Downloading the Adafruit CircuitPython Library Bundle	48
• The CircuitPython Community Library Bundle	49
• Downloading the CircuitPython Community Library Bundle	49
• Understanding the Bundle	50
• Example Files	50
• Copying Libraries to Your Board	51
• Understanding Which Libraries to Install	51
• Example: ImportError Due to Missing Library	54
• Library Install on Non-Express Boards	55
• Updating CircuitPython Libraries and Examples	55
• CircUp CLI Tool	56
<b>CircuitPython Documentation</b>	<b>56</b>
• CircuitPython Core Documentation	56
• CircuitPython Library Documentation	58
<b>Recommended Editors</b>	<b>63</b>
• Recommended editors	63
• Recommended only with particular settings or add-ons	64
• Editors that are NOT recommended	64
<b>Advanced Serial Console on Windows</b>	<b>65</b>
• Windows 7 and 8.1	65
• What's the COM?	65
• Install Putty	66
<b>Advanced Serial Console on Mac</b>	<b>68</b>
• What's the Port?	68
• Connect with screen	69
<b>Advanced Serial Console on Linux</b>	<b>70</b>
• What's the Port?	71
• Connect with screen	72
• Permissions on Linux	73
<b>Frequently Asked Questions</b>	<b>75</b>
<b>ESP32-S2 Bugs &amp; Limitations</b>	<b>78</b>
<b>Troubleshooting</b>	<b>79</b>
• Always Run the Latest Version of CircuitPython and Libraries	79
• I have to continue using CircuitPython 5.x or earlier. Where can I find compatible libraries?	80
• Bootloader (boardnameBOOT) Drive Not Present	80
• Windows Explorer Locks Up When Accessing boardnameBOOT Drive	81
• Copying UF2 to boardnameBOOT Drive Hangs at 0% Copied	82
• CIRCUITPY Drive Does Not Appear or Disappears Quickly	82
• Device Errors or Problems on Windows	82
• Serial Console in Mu Not Displaying Anything	83
• code.py Restarts Constantly	84
• CircuitPython RGB Status Light	85
• CircuitPython 7.0.0 and Later	85
• CircuitPython 6.3.0 and earlier	86
• Serial console showing ValueError: Incompatible .mpy file	87
• CIRCUITPY Drive Issues	87

• Safe Mode	88
• To erase CIRCUITPY: storage.erase_filesystem()	90
• Erase CIRCUITPY Without Access to the REPL	90
• For the specific boards listed below:	90
• For SAMD21 non-Express boards that have a UF2 bootloader:	92
• For SAMD21 non-Express boards that do not have a UF2 bootloader:	93
• Running Out of File Space on SAMD21 Non-Express Boards	93
• Delete something!	94
• Use tabs	94
• On MacOS?	94
• Prevent & Remove MacOS Hidden Files	94
• Copy Files on MacOS Without Creating Hidden Files	95
• Other MacOS Space-Saving Tips	96
• Device Locked Up or Boot Looping	97
<b>Welcome to the Community!</b>	<b>98</b>
• Adafruit Discord	98
• CircuitPython.org	100
• Adafruit GitHub	104
• Adafruit Forums	105
• Read the Docs	106
<b>CircuitPython Essentials</b>	<b>107</b>
<b>Blink</b>	<b>108</b>
• LED Location	109
• Blinking an LED	109
<b>TFT Basics</b>	<b>110</b>
• CircuitPython Serial Output and REPL	111
• Simple Text Display	112
• Simple Bitmap Display	113
• Simple Sensor Data Display	115
<b>CircuitPython Internet Test</b>	<b>116</b>
• Secrets File	118
<b>TFT GitHub Stars WiFi Demo</b>	<b>121</b>
• GitHub Stars WiFi Demo Secrets	121
• Set Up CIRCUITPY	121
• Code Walkthrough	123
<b>I2C: On-Board Battery Monitor</b>	<b>124</b>
• LC709203 Location	124
• LC709203 Simple Data Example	125
<b>Adafruit IO: Send and Receive Data</b>	<b>126</b>
• NeoPixel Location	126
• Adafruit IO Feeds and Dashboard	127
• Adafruit IO Example Secrets	129
• Adafruit IO Example Code	129
• NeoPixel Color Change	132
• Code Walkthrough	132

I2C: External Sensor	136
• I2C and CircuitPython	136
• Necessary Hardware	137
• Wiring the MCP9808	137
• Find Your Sensor	138
• I2C Sensor Data	139
• Where's my I2C?	140
Analog In	142
• Analog to Digital Converter (ADC)	143
• Potentiometers	144
• Hardware	145
• Wire Up the Potentiometer	145
• Reading Analog Pin Values	145
• Reading Analog Voltage Values	147
NeoPixel LED	148
• NeoPixel Location	149
• NeoPixel Color and Brightness	149
• RGB LED Colors	151
• NeoPixel Rainbow	152
Digital Input	153
• LED and Button	154
• Controlling the LED with a Button	154
Storage	155
• The boot.py File	156
• The code.py File	157
• Logging the Temperature	158
• Recovering a Read-Only Filesystem	160
Capacitive Touch	160
• One Capacitive Touch Pin	160
• Pin Location	161
• Reading Touch on the Pin	161
• Multiple Capacitive Touch Pins	162
• Pin Location	163
• Reading Touch on the Pins	163
• The Available Touch-Capable Pins	164
CPU Temperature	165
• Microcontroller Location	166
• Reading the Microcontroller Temperature	166
Arduino IDE Setup	167
Using with Arduino IDE	171
• Blink	171
• Select ESP32-S2/S3 Board in Arduino IDE	171
• Launch ESP32-S2/S3 ROM Bootloader	171
• Load Blink Sketch	172
Arduino Blink	174
• Pre-Flight Check: Get Arduino IDE & Hardware Set Up	174


• Start up Arduino IDE and Select Board/Port	175
• New Blink Sketch	176
• Verify (Compile) Sketch	177
• Upload Sketch	179
• Native USB and manual bootloading	180
• Enter Manual Bootload Mode	181
• Finally, a Blink!	183
<b>I2C Scan Test</b>	<b>183</b>
• Common I2C Connectivity Issues	183
• Perform an I2C scan!	184
• Wiring the MCP9808	187
<b>I2C: On-Board LC709203 Battery Monitor</b>	<b>187</b>
• Arduino Library Installation	188
• LC709203 Simple Data Example	189
<b>Built-In TFT</b>	<b>190</b>
• Arduino Library Installation	190
• Graphics Test Example Code	191
<b>WiFi Test</b>	<b>196</b>
• WiFi Connection Test	198
• Secure Connection Example	200
• JSON Parsing Demo	203
<b>Usage with Adafruit IO</b>	<b>207</b>
• Install Libraries	208
• Adafruit IO Setup	209
• Code Usage	213
<b>Factory Shipped Demo</b>	<b>215</b>
• Arduino Library Installation	215
• Factory Demo Example Code	217
<b>WipperSnapper Setup</b>	<b>220</b>
• What is WipperSnapper?	220
• Sign up for Adafruit.IO	221
• Install WipperSnapper	221
• WipperSnapper Configuration	223
<b>WipperSnapper Usage</b>	<b>225</b>
• Blink a LED	225
• Read a Push-Button	228
• Read an I2C Sensor	233
• Going Further	237
<b>Factory Reset</b>	<b>237</b>
• Factory Reset Firmware UF2	238
• Factory Reset and Bootloader Repair	238
• Download .bin and Enter Bootloader	239
• Step 1. Download the factory-reset-and-bootloader.bin file	239
• Step 2. Enter ROM bootloader mode	239
• The WebSerial ESPTool Method	240
• Connect	240

• Erase the Contents	242
• Program the ESP32-S2	243
• The esptool Method (for advanced users)	244
• Install ESPTool.py	244
• Test the Installation	244
• Connect	245
• Installing the Bootloader	245
• Reset the board	246
• Older Versions of Chrome	246
• The Flash an Arduino Sketch Method	247
• Arduino IDE Setup	247
• Load the Blink Sketch	248
<b>Install UF2 Bootloader</b>	<b>249</b>
<b>Downloads</b>	<b>250</b>
• Files	250
• Schematic and Fab Print	251
• 3D Model	252



---


# Overview

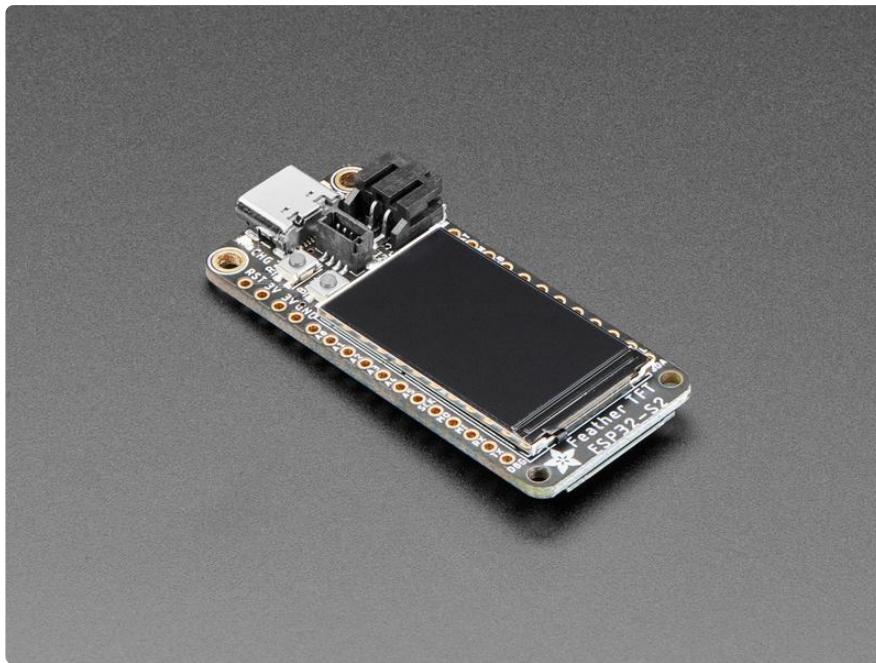

We've got a new machine here at Adafruit - it can uncover your deepest desires. Don't believe me? I'll turn it on right now to prove it to you! What, you want unlimited mozzarella sticks? Ok, well, that's not something we can provide. But we can provide your second-deepest desire: an ESP32-S2 Feather board with a built in IPS TFT color display.


It's got all the ~~gooeyness of a mozzarella stick~~ features of a Feather main board, the comforting warmth of an ESP32-S2 WiFi microcontroller, and the crispness of a 240x135 pixel color TFT display. All that and it will even plug in nicely into a breadboard, [terminal block wing](https://adafru.it/wfv) (<https://adafru.it/wfv>), or [Feather Doubler](https://adafru.it/kBi) (<https://adafru.it/kBi>), or even just stack on top of another 'Wing.

This Feather comes with native USB and 4 MB flash + 2 MB of PSRAM, so it is perfect for use with CircuitPython or Arduino with low-cost WiFi. Native USB means it can act like a keyboard or a disk drive. WiFi means it's awesome for IoT projects. And Feather means it works with the large community of FeatherWings for expandability.

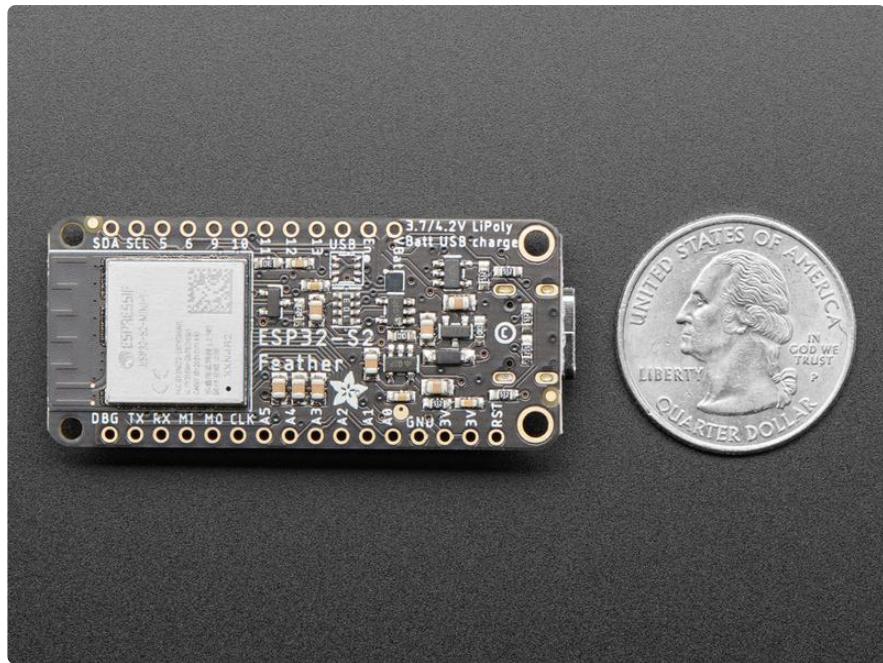


The ESP32-S2 is a highly-integrated, low-power, 2.4 GHz Wi-Fi System-on-Chip (SoC) solution that now has built-in native USB as well as some other interesting new technologies like Time of Flight distance measurements. With its state-of-the-art power and RF performance, this SoC is an ideal choice for a wide variety of application scenarios relating to the [Internet of Things \(IoT\)](https://adafru.it/Bwq) (<https://adafru.it/Bwq>), [wearable electronics](https://adafru.it/Osb) (<https://adafru.it/Osb>), and smart homes.

Please note: the Feather ESP32-S2 has a single-core 240 MHz chip, so it won't be as fast as ESP32's with dual-core. Also, there is no Bluetooth support. However, we are super excited about the ESP32-S2's native USB which unlocks a lot of capabilities for advanced interfacing! The ESP32-S2 mini-module we are using on the Feather comes with 4 MB flash and 2 MB PSRAM, so you can buffer massive JSON files for parsing!

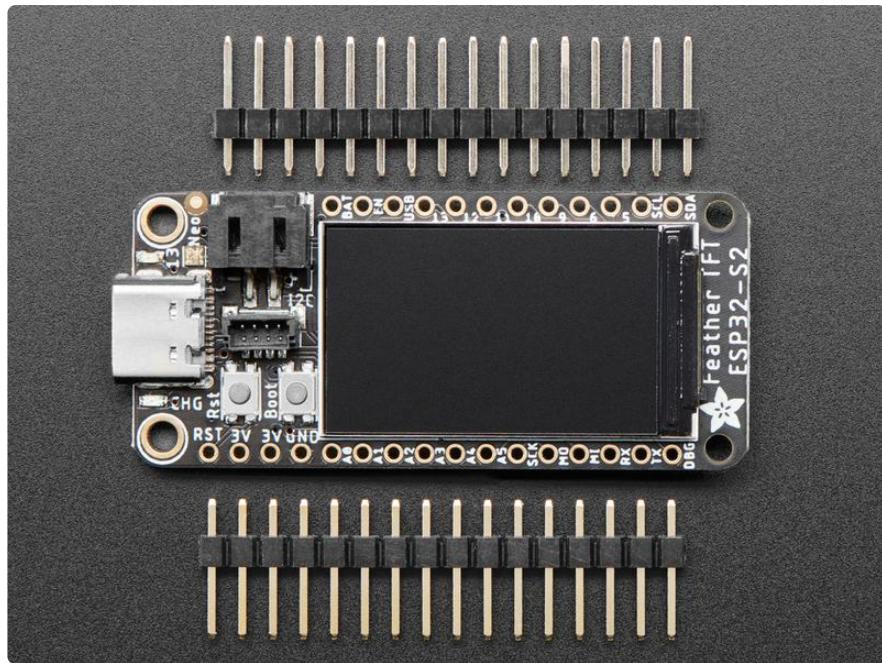


The color TFT is connected to the SPI pins, and uses additional pins for control that are not exposed to the breakout pads. [It's the same display as you see here, with 240x135 pixels and is IPS \(<https://adafru.it/XLA>\)](#) so you get bright color at any angle. The backlight is also connected to a separate pin so you can PWM the backlight up and down as desired.

For low power usages, the Feather has a second AP2112 regulator. The regulator is controlled with a GPIO pin on the enable line and can shut off power to the Stemma QT port and TFT. There is also a separate power pin for the NeoPixel that can be used to disable it for even lower quiescent power. With everything off and in deep sleep mode, the TFT Feather uses about 100uA of current.



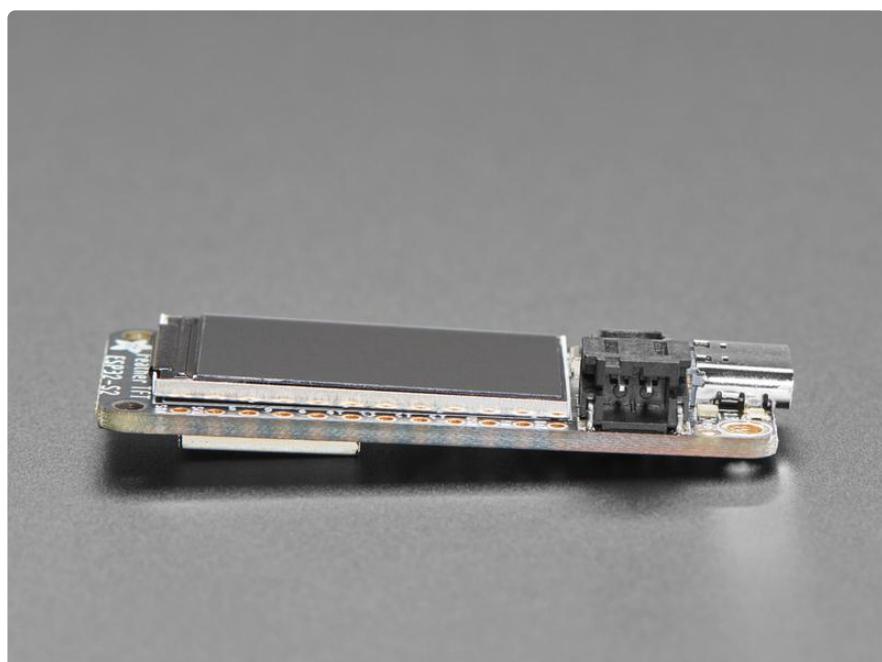


## Features:

- ESP32-S2 240MHz Tensilica processor - the next generation of ESP32, now with native USB so it can act like a keyboard/mouse, MIDI device, disk drive, etc!
- Mini module has FCC/CE certification and comes with 4 MByte of Flash and 2 MByte of PSRAM - you can have huge data buffers.
- Color 1.14" IPS TFT with 240x135 pixels (<https://adafruit.it/XLA>) - bright and colorful display with ST7789 chipset that can be viewed at any angle.
- Power options - USB type C or LiPoly battery.
- Built-in battery charging when powered over USB-C.
- LiPoly battery monitor - LC709203 chip actively monitors your battery for voltage and state of charge / percentage reporting over I2C.
- Reset and DFU (BOOT0) buttons to get into the ROM bootloader (which is a USB serial port so you don't need a separate cable!)
- Serial debug output pin (optional, for checking the hardware serial debug console)
- STEMMA QT connector for I2C devices, with switchable power, so you can go into low power mode.
- On/Charge/User LEDs + status NeoPixel with pin-controlled power for low power usage.
- Low Power friendly! In deep sleep mode we can get down to 80~100uA of current draw from the LiPoly connection. Quiescent current is from the power regulator, ESP32-S2 chip, and LiPoly monitor. Turn off the NeoPixel and external I2C/TFT power for the lowest quiescent current draw.
- Works with Arduino or CircuitPython

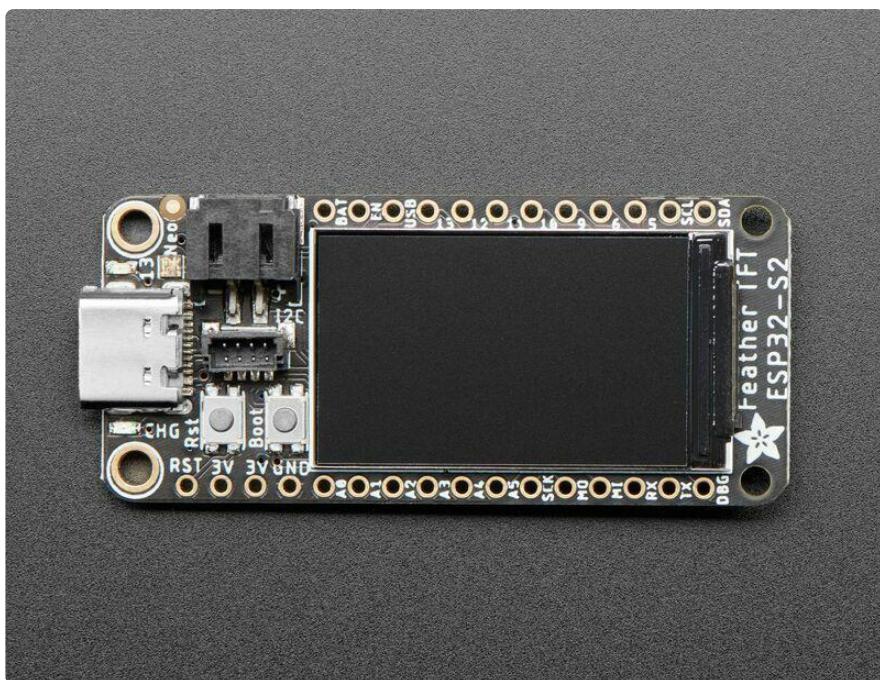


# Pinouts

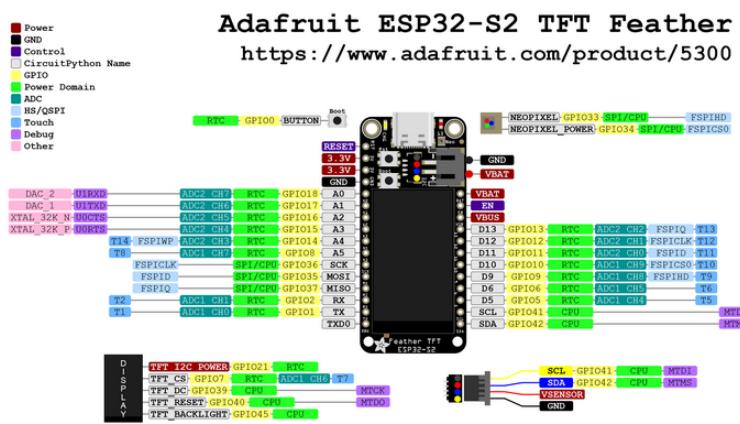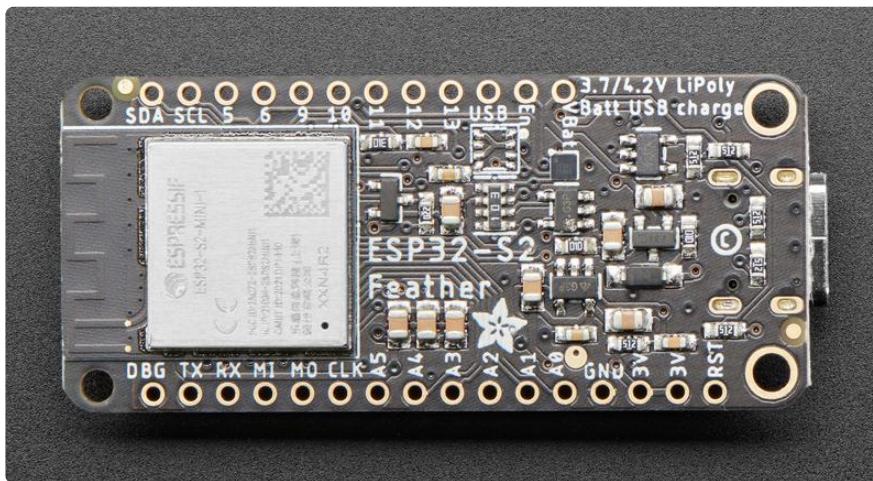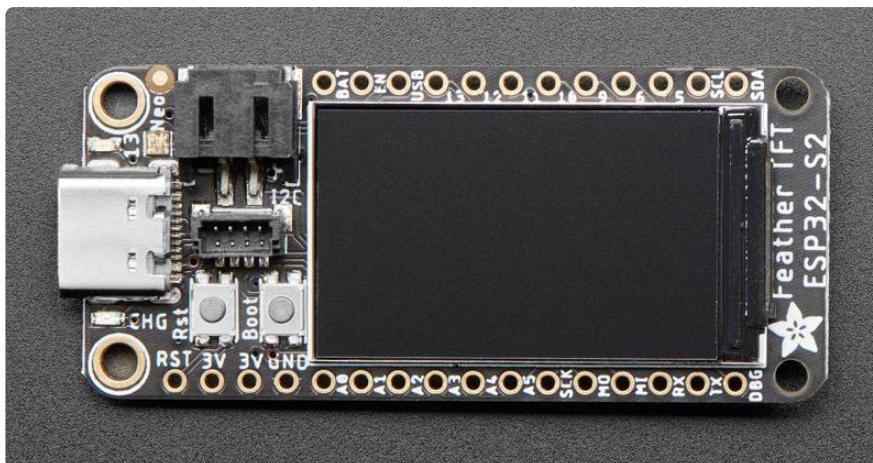

PrettyPins PDF [on GitHub](https://adafru.it/XLD) (<https://adafru.it/XLD>).


## Power

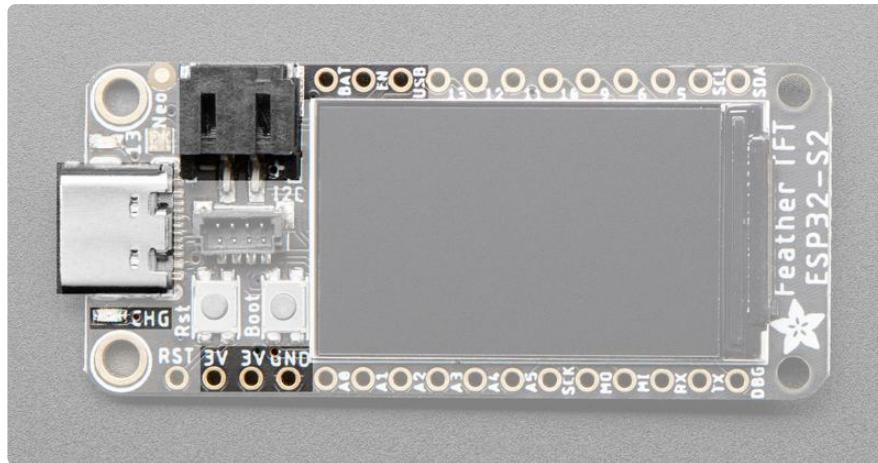

There are two ways you can power the Feather ESP32-S2, as well as other related pins.

- USB-C port - This is used for both powering and programming the board. You can power it with any USB C cable. When USB is plugged in it will charge the Lipoly battery.
- LiPoly connector/charger - You can plug in any 250mAh or larger 3.7/4.2V Lipoly battery into this JST 2-PH port to both power your Feather and charge the battery. The battery will charge from the USB power when USB is plugged in. If the battery is plugged in and USB is plugged in, the Feather will power itself from USB and it will charge the battery up.
- CHG LED - When the battery is charging, the yellow CHG LED will be lit. When charging is complete, the LED will turn off. If there's no battery plugged in, the CHD LED may blink rapidly - this is expected!
- GND - This is the common ground for all power and logic.
- BAT - This is the positive voltage to/from the 2-pin JST jack for the optional Lipoly battery.
- USB - This is the positive voltage to/from the USB C jack, if USB is connected.
- EN - This is the 3.3V regulator's enable pin. It's pulled up, so connect to ground to disable the 3.3V regulator.
- 3.3V - These pins are the output from the 3.3V regulator, they can supply 500mA peak.

## TFT Display

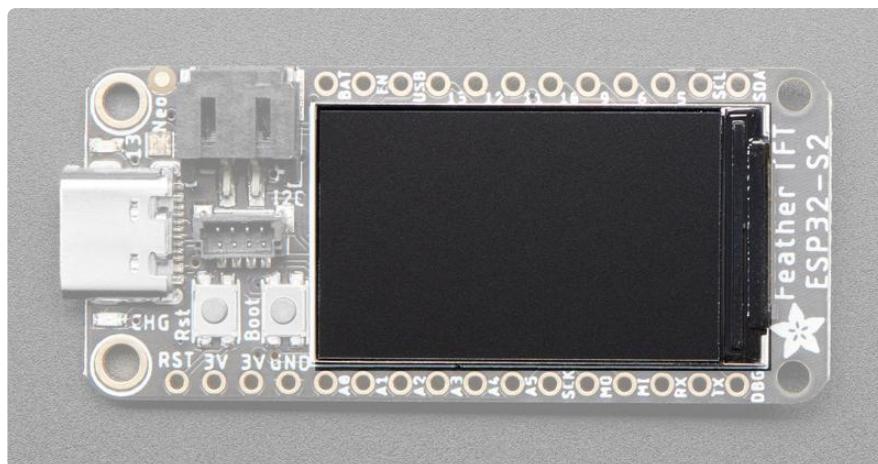


On the front of the board is a [color 1.14" IPS TFT with 240x135 pixels](https://adafru.it/XLA) (<https://adafru.it/XLA>). It's a bright and colorful display with ST7789 chipset that can be viewed at any angle.

There is a power pin that must be pulled high for the display to work. This is done automatically by CircuitPython. You must manually do this in Arduino. The pin is available in CircuitPython and in Arduino as `TFT_I2C_POWER`.

The `TFT_I2C_POWER` pin must be manually pulled high in Arduino for the TFT to receive power.

## ESP32-S2 WiFi Module

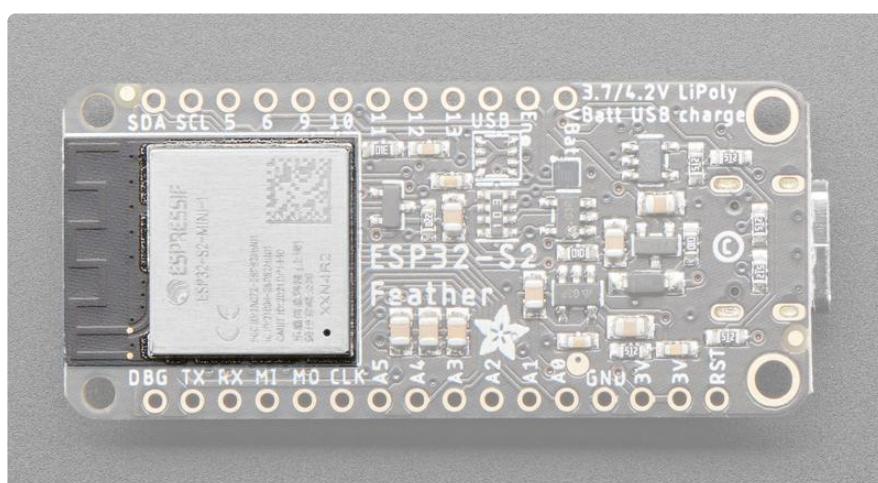


This is the ESP32-S2 module.

The ESP32-S2 is a highly-integrated, low-power, 2.4 GHz Wi-Fi System-on-Chip (SoC) solution that now has built-in native USB as well as some other interesting new technologies like Time of Flight distance measurements. With its state-of-the-art power and RF performance, this SoC is an ideal choice for a wide variety of application scenarios relating to the [Internet of Things \(IoT\)](https://adafru.it/Bwq) (<https://adafru.it/Bwq>), [wearable electronics](https://adafru.it/Osb) (<https://adafru.it/Osb>), and smart homes.

Please note, this is a single-core 240 MHz chip so it won't be as fast as ESP32's with dual-core. Also, there is no Bluetooth support. However, we are super excited about the ESP32-S2's native USB which unlocks a lot of capabilities for advanced interfacing! This module comes with 4 MB flash and 2 MB PSRAM.

The 4 MB of flash is inside the module and is used for both program firmware and filesystem storage. For example, in CircuitPython, we have 3 MB set aside for program firmware (this includes two OTA option spots as well) and a 1MB section for CircuitPython scripts and files.

## BME280 Temperature, Humidity and Pressure Sensor

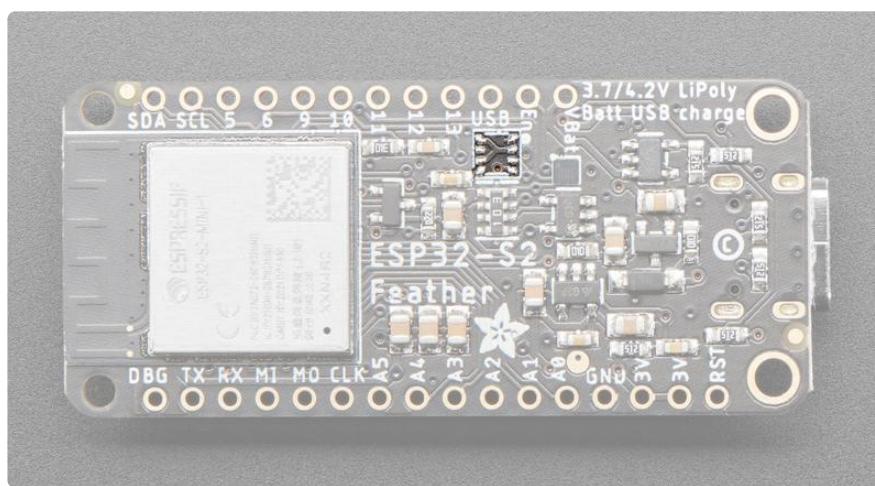

The ESP32-S2 TFT Feather comes with an unpopulated space for a BME280 Temperature, Humidity and Barometric Pressure Sensor.

There is currently no BME280 sensor shipped on the ESP32-S2 TFT Feather - only a space for it!


The sensor connects over I<sub>2</sub>C (at address 0x77), and provides immediate ambient weather sensing. It is rated for measuring humidity with  $\pm 3\%$  accuracy, barometric pressure with  $\pm 1$  hPa absolute accuracy, and temperature with  $\pm 1.0^{\circ}\text{C}$  accuracy.

Because pressure changes with altitude, and the pressure measurements are so good, you can also use it as an altimeter with  $\pm 1$  meter or better accuracy!

There is a power pin that must be pulled high for the sensor to work. This is done automatically by CircuitPython. You must manually do this in Arduino. The pin is available in CircuitPython and in Arduino as `TFT_I2C_POWER`.

The `TFT_I2C_POWER` pin must be manually pulled high in Arduino for the BME280 to receive power.

## Logic Pins

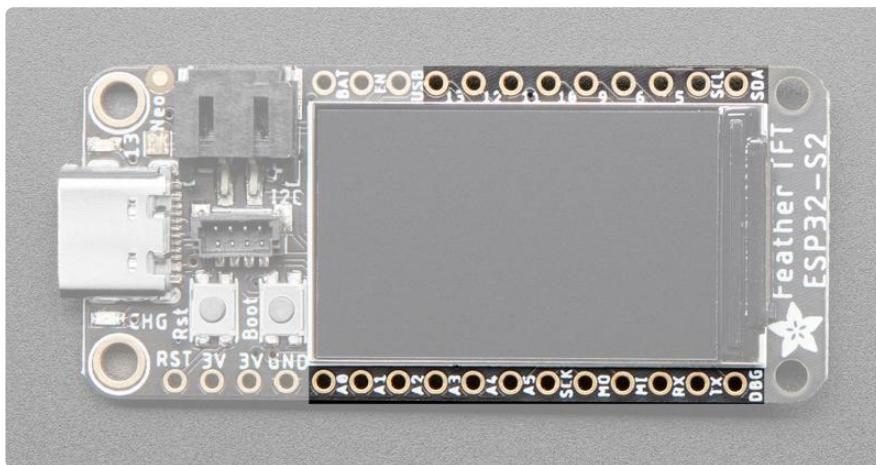

These are the logic pins that can be used to connect FeatherWings, sensors, servos, LEDs and more!

No pins are shared, and no pins are 'special' bootstrapping pins, so you can use any of them for input, or output, will pullups or pulldowns, without worry.

ESP32 chips allow for 'multiplexing' of almost all signals so it isn't like some pins can do PWM and others can. You can connect any of the available PWM channels, I2S channels, UART, I2C or SPI ports to any pin. There are some exceptions....

There are six analog pins.

- A0 and A1 are the only DAC output pins. These can be used as 8-bit true analog outputs. No other pins can do so. A0 and A1 are on ADC2.
- A2 thru A5 can also be analog inputs. A2 thru A4 are on ADC2, and A5 is on ADC1.

The SPI pins are on the ESP32-S2 high-speed peripheral. You can set any pins to be the low-speed peripheral but you won't get the speedy interface!

- SCK - This is the SPI clock pin.
- MOSI - This is the SPI Microcontroller Out / Sensor In pin.
- MISO - This is the SPI Microcontroller In / Sensor Out pin.

The UART interface.

- RX - This is the UART receive pin. Connect to TX (transmit) pin on your sensor or breakout.
- TX - This is the UART transmit pin. Connect to RX (receive) pin on your sensor or breakout.

The I2C interface. This is shared by the STEMMA QT connector.


- SCL - This is the I2C clock pin. There is a 10k pullup on this pin.
- SDA - This is the I2C data pin. There is a 10k pullup on this pin.
- There is an I2C power pin that needs to be pulled low for the BME280 sensor and the STEMMA QT connector to work properly. It is available in CircuitPython and Arduino as `TFT_I2C_POWER`.

The digital pins.

- D5-D6, D9-D13 - These are digital pins. D5, D6, D9 and D10 are on ADC1. D11-D13 are on ADC2.

Check the ESP32-S2 datasheet or the PrettyPins diagram above for the ADC channel names for each pin if you need em!


## NeoPixel and Red LED

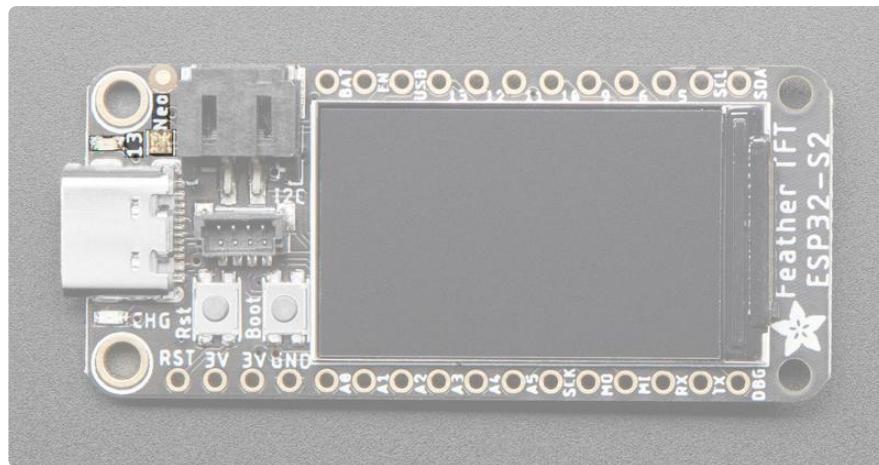

- NeoPixel LED - This addressable RGB NeoPixel LED, labeled Neo on the board, works both as a status LED (in CircuitPython and the bootloader), and can be controlled with code. It is available in CircuitPython as `board.NEOPixel`, and in Arduino as `PIN_NEOPIXEL`.
- There is a NeoPixel power pin that needs to be pulled high for the NeoPixel to work. This is done automatically by CircuitPython. You must manually do this in Arduino. It is available in CircuitPython and Arduino as `NEOPixel_POWER`.
- Red LED - This little red LED, labeled #13 on the board, is on or blinks during certain operations (such as pulsing when in the bootloader), and is controllable in code. It is available in CircuitPython as `board.LED`, and in Arduino as `LED_BUILTIN` or `13`.

The `NEOPixel_POWER` pin must be pulled high in Arduino for the NeoPixel LED to receive power.

## STEMMA QT

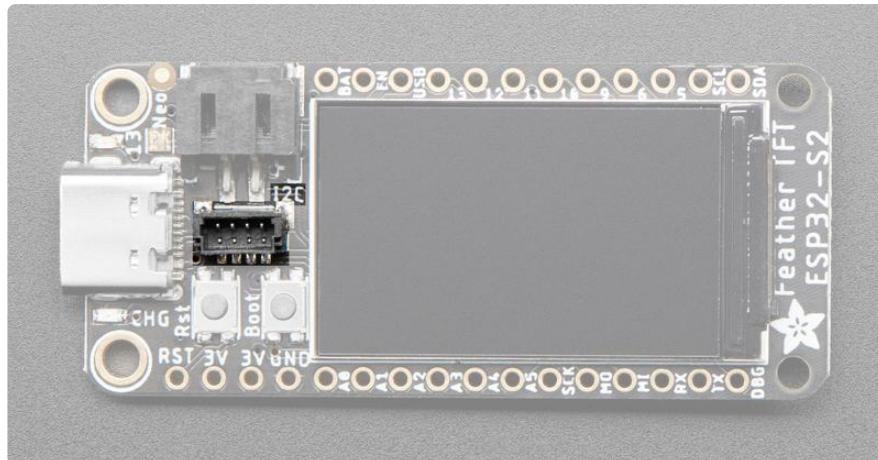


This JST SH 4-pin [STEMMA QT](https://adafru.it/Ft4) (<https://adafru.it/Ft4>) connector breaks out I2C (SCL, SDA, 3.3V, GND). It allows you to connect to [various breakouts and sensors with STEMMA QT connectors](https://adafru.it/Qgf) (<https://adafru.it/Qgf>) or to other things using [assorted associated accessories](https://adafru.it/Ft6) (<https://adafru.it/Ft6>). It works great with any STEMMA QT or Qwiic sensor/device. You can also use it with Grove I2C devices thanks to [this handy cable](https://adafru.it/Ndk) (<https://adafru.it/Ndk>).

There is a power pin that must be pulled high for the STEMMA QT connector to work. This is done automatically by CircuitPython. You must manually do this in Arduino. The pin is available in CircuitPython and in Arduino as `TFT_I2C_POWER`.

The `TFT_I2C_POWER` pin must be manually pulled high in Arduino for the STEMMA QT connector to receive power.


## Buttons

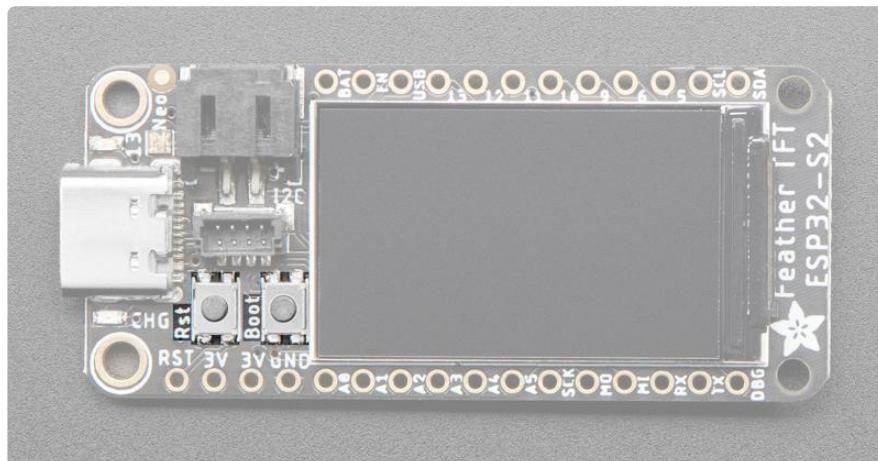

There are two buttons on the ESP32-S2 TFT Feather.

- Reset button - This button restarts the board and helps enter the bootloader. You can click it once to reset the board without unplugging the USB cable or battery. Tap once, and then tap again while the NeoPixel status LED is purple to enter the UF2 bootloader (needed to load CircuitPython).
- The RST pin is can be used to reset the board. Tie to ground manually to reset the board.
- Boot button - This button can be used as an input, or to put the board into ROM bootloader mode. It is available in CircuitPython as `board.BUTTON`, and Arduino as `0`. To enter ROM bootloader mode, hold down DFU button while clicking reset button mentioned above. When in the ROM bootloader, you can upload code and query the chip using `esptool`.

## Debug

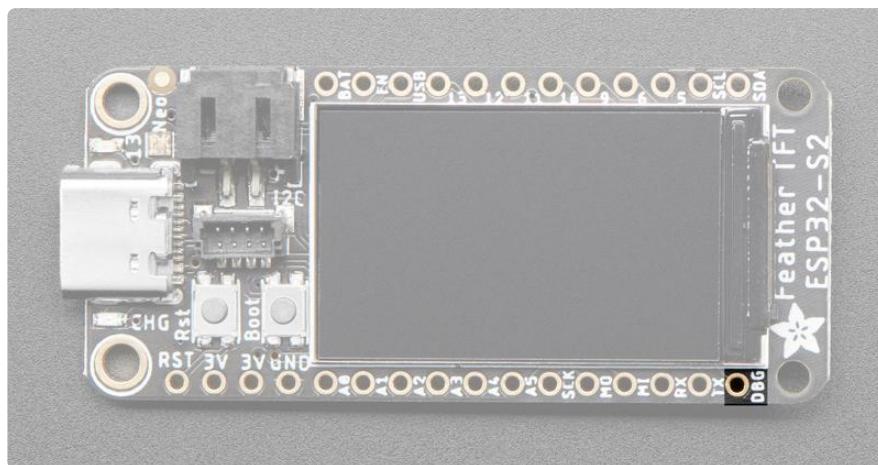

This is the Debug TX (DBG) pin. This is the hardware UART debug pin. [You can connect this to a USB console cable in order to read the debug output from the ESP32 IDF](#) (<https://adafru.it/dDd>). This is useful if you are writing software and need to see the low level debug output.

This is not where default `Serial.print()` or CircuitPython `print()` outputs go - those will go through the USB port instead!

---

## CircuitPython

[CircuitPython](#) (<https://adafru.it/tB7>) is a derivative of [MicroPython](#) (<https://adafru.it/BeZ>) designed to simplify experimentation and education on low-cost microcontrollers. It


makes it easier than ever to get prototyping by requiring no upfront desktop software downloads. Simply copy and edit files on the CIRCUITPY drive to iterate.

## CircuitPython Quickstart

Follow this step-by-step to quickly get CircuitPython running on your board.


Download the latest version of  
CircuitPython for this board via  
[circuitpython.org](https://circuitpython.org)

<https://adafru.it/YwB>

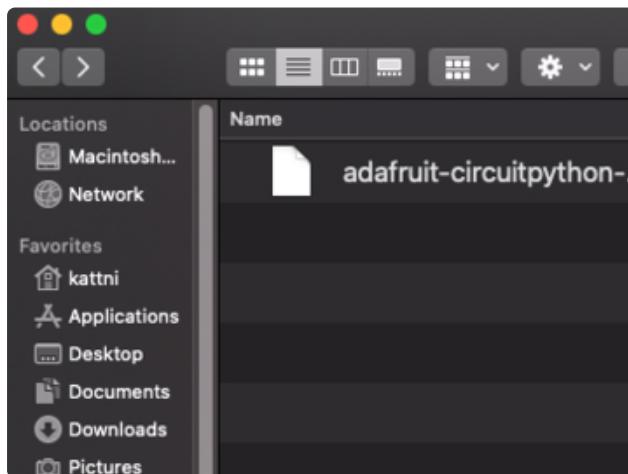

Click the link above to download the latest  
CircuitPython UF2 file.

Save it wherever is convenient for you.

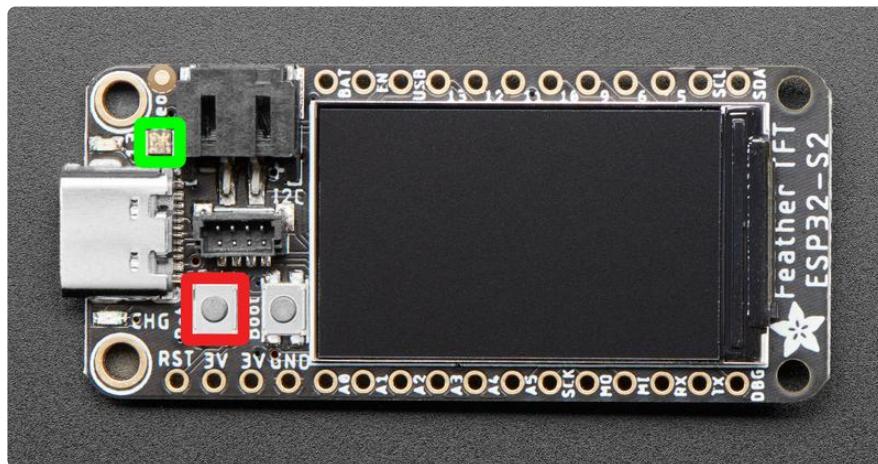


Plug your board into your computer, using a known-good data-sync cable, directly, or via an adapter if needed.


Double-click the reset button (highlighted in red above), and you will see the RGB status LED(s) turn green (highlighted in green above). If you see red, try another port, or if you're using an adapter or hub, try without the hub, or different adapter or hub.

If double-clicking doesn't work the first time, try again. Sometimes it can take a few tries to get the rhythm right!


A lot of people end up using charge-only USB cables and it is very frustrating! Make sure you have a USB cable you know is good for data sync.

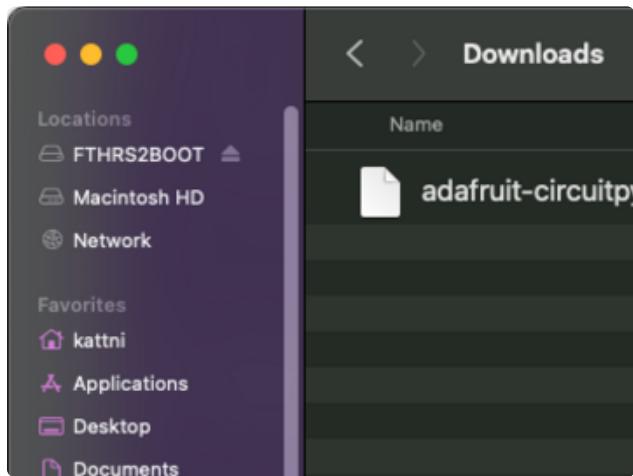

You will see a new disk drive appear called FTHRS2BOOT.

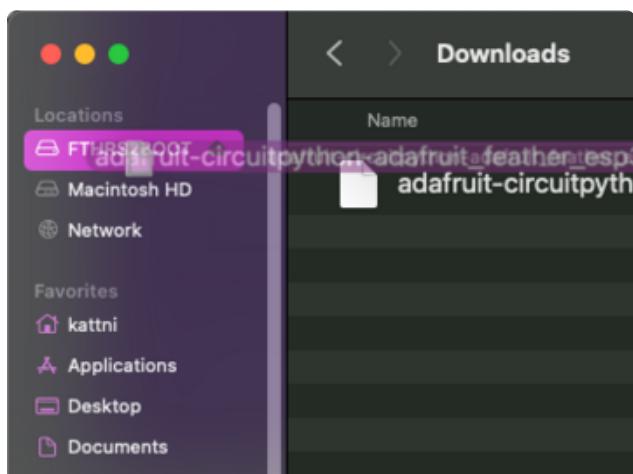

Drag the adafruit\_circuitpython\_etc.uf2 file to FTHRS2BOOT.

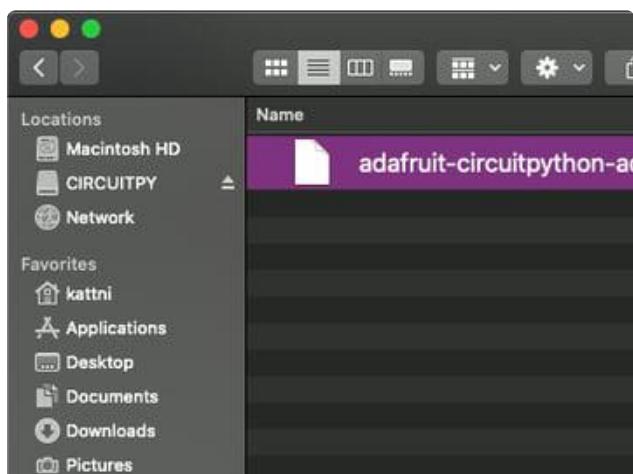

The BOOT drive will disappear and a new disk drive called CIRCUITPY will appear.


That's it!

# Installing the Mu Editor

Mu is a simple code editor that works with the Adafruit CircuitPython boards. It's written in Python and works on Windows, MacOS, Linux and Raspberry Pi. The serial console is built right in so you get immediate feedback from your board's serial output!

Mu is our recommended editor - please use it (unless you are an experienced coder with a favorite editor already!).

## Download and Install Mu

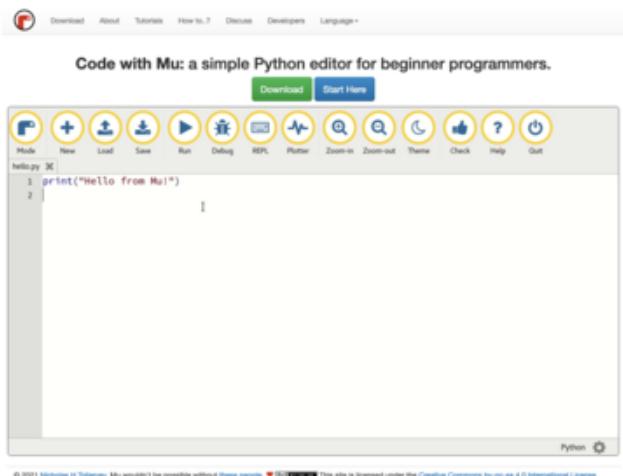

Download Mu from <https://codewith.mu> (<https://adafru.it/Be6>).


Click the Download link for downloads and installation instructions.

Click Start Here to find a wealth of other information, including extensive tutorials and how-to's.

Windows users: due to the nature of MSI installers, please remove old versions of Mu before installing the latest version.


Ubuntu users: Mu currently (checked May 4, 2022) does not install properly on Ubuntu 22.04. See <https://github.com/mu-editor/mu/issues> to track this issue. See <https://learn.adafruit.com/welcome-to-circuitpython/recommended-editors> and <https://learn.adafruit.com/welcome-to-circuitpython/pycharm-and-circuitpython> for other editors to use.

## Starting Up Mu

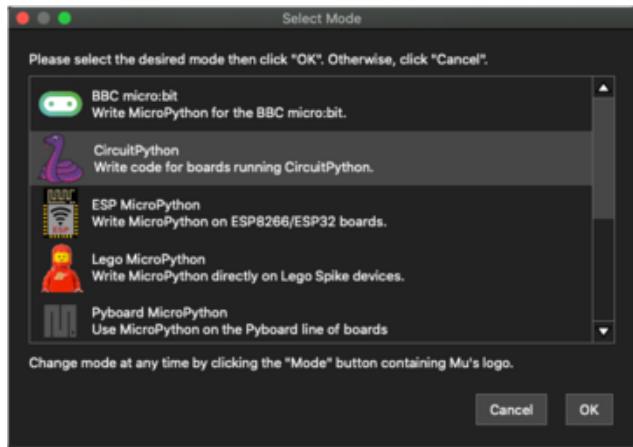

The first time you start Mu, you will be prompted to select your 'mode' - you can always change your mind later. For now please select CircuitPython!

The current mode is displayed in the lower right corner of the window, next to the "gear" icon. If the mode says "Microbit" or something else, click the Mode button in the upper left, and then choose "CircuitPython" in the dialog box that appears.

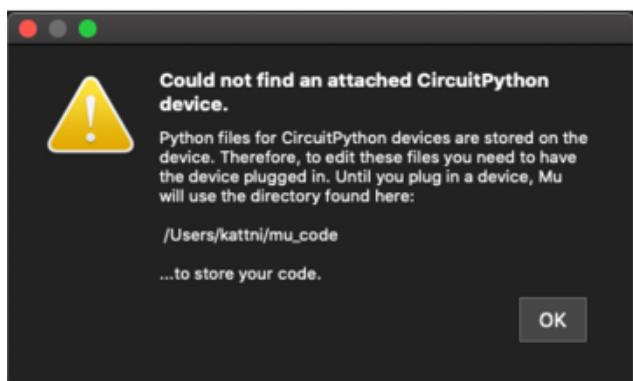

Mu attempts to auto-detect your board on startup, so if you do not have a CircuitPython board plugged in with a CIRCUITPY drive available, Mu will inform you where it will store any code you save until you plug in a board.

To avoid this warning, plug in a board and ensure that the CIRCUITPY drive is mounted before starting Mu.

## Using Mu

You can now explore Mu! The three main sections of the window are labeled below; the button bar, the text editor, and the serial console / REPL.



Now you're ready to code! Let's keep going...


## The CIRCUITPY Drive

When CircuitPython finishes installing, or you plug a CircuitPython board into your computer with CircuitPython already installed, the board shows up on your computer as a USB drive called CIRCUITPY.

The CIRCUITPY drive is where your code and the necessary libraries and files will live. You can edit your code directly on this drive and when you save, it will run automatically. When you create and edit code, you'll save your code in a code.py file located on the CIRCUITPY drive. If you're following along with a Learn guide, you can paste the contents of the tutorial example into code.py on the CIRCUITPY drive and save it to run the example.

With a fresh CircuitPython install, on your CIRCUITPY drive, you'll find a code.py file containing `print("Hello World!")` and an empty lib folder. If your CIRCUITPY drive does not contain a code.py file, you can easily create one and save it to the drive. CircuitPython looks for code.py and executes the code within the file automatically when the board starts up or resets. Following a change to the contents of CIRCUITPY, such as making a change to the code.py file, the board will reset, and the code will be run. You do not need to manually run the code. This is what makes it so easy to get started with your project and update your code!

Note that all changes to the contents of CIRCUITPY, such as saving a new file, renaming a current file, or deleting an existing file will trigger a reset of the board.

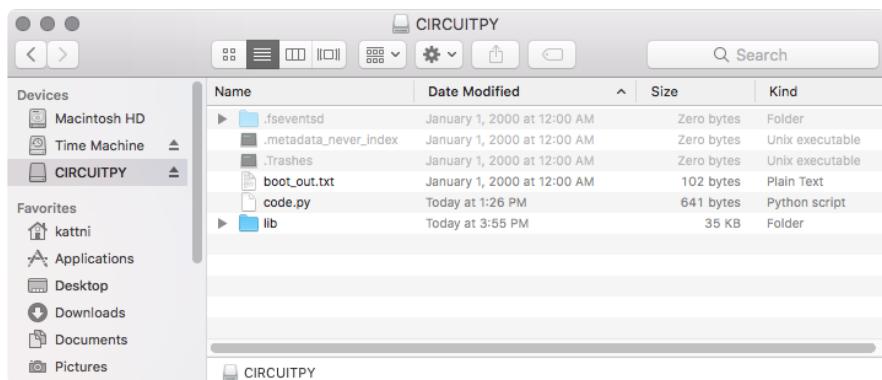


## Creating and Editing Code

One of the best things about CircuitPython is how simple it is to get code up and running. This section covers how to create and edit your first CircuitPython program.

To create and edit code, all you'll need is an editor. There are many options. Adafruit strongly recommends using Mu! It's designed for CircuitPython, and it's really simple and easy to use, with a built in serial console!

If you don't or can't use Mu, there are a number of other editors that work quite well. The [Recommended Editors page](https://adafru.it/Vue) (<https://adafru.it/Vue>) has more details. Otherwise, make sure you do "Eject" or "Safe Remove" on Windows or "sync" on Linux after writing a file if you aren't using Mu. (This is not a problem on MacOS.)

### Creating Code

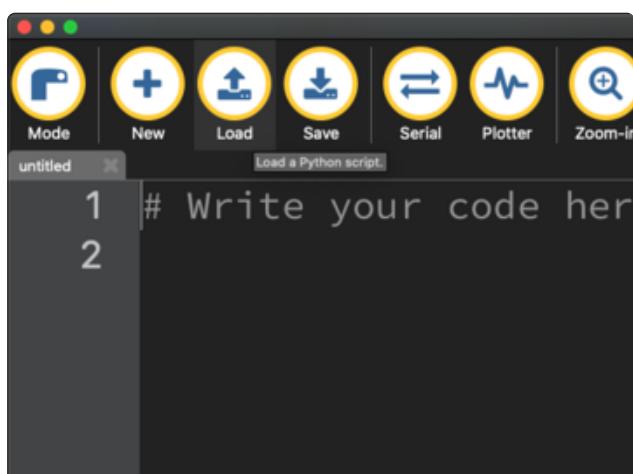

Installing CircuitPython generates a code.py file on your CIRCUITPY drive. To begin your own program, open your editor, and load the code.py file from the CIRCUITPY drive.

If you are using Mu, click the Load button in the button bar, navigate to the CIRCUITPY drive, and choose code.py.

Copy and paste the following code into your editor:

```
import board
import digitalio
import time
```


```
led = digitalio.DigitalInOut(board.LED)
led.direction = digitalio.Direction.OUTPUT

while True:
    led.value = True
    time.sleep(0.5)
    led.value = False
    time.sleep(0.5)
```

The KB2040, QT Py and the Trinkeys do not have a built-in little red LED! There is an addressable RGB NeoPixel LED. The above example will NOT work on the KB2040, QT Py or the Trinkeys!


If you're using a KB2040, QT Py or a Trinkey, please download the [NeoPixel blink example](#) (<https://adafru.it/UDU>).

The NeoPixel blink example uses the onboard NeoPixel, but the time code is the same. You can use the linked NeoPixel Blink example to follow along with this guide page.

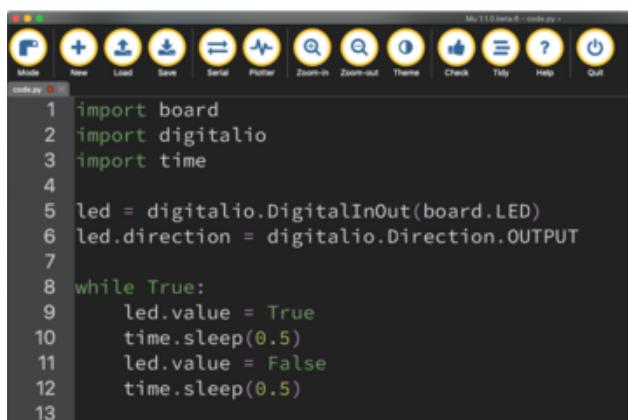

```
1 import board
2 import digitalio
3 import time
4
5 led = digitalio.DigitalInOut(board.LED)
6 led.direction = digitalio.Direction.OUTPUT
7
8 while True:
9     led.value = True
10    time.sleep(0.5)
11    led.value = False
12    time.sleep(0.5)
13
```

It will look like this. Note that under the `while True:` line, the next four lines begin with four spaces to indent them, and they're indented exactly the same amount. All the lines before that have no spaces before the text.

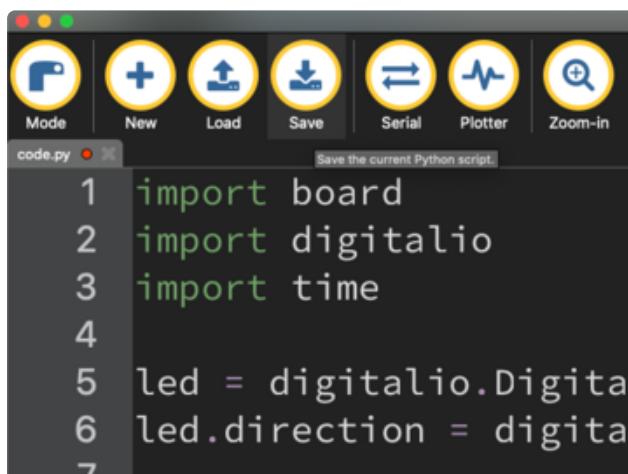

```
1 import board
2 import digitalio
3 import time
4
5 led = digitalio.DigitalInOut(board.LED)
6 led.direction = digitalio.Direction.OUTPUT
7
```

Save the code.py file on your CIRCUITPY drive.

The little LED should now be blinking. Once per half-second.


Congratulations, you've just run your first CircuitPython program!

On most boards you'll find a tiny red LED.

On the ItsyBitsy nRF52840, you'll find a tiny blue LED.

On QT Py M0, QT Py RP2040, and the Trinkey series, you will find only an RGB NeoPixel LED.

## Editing Code

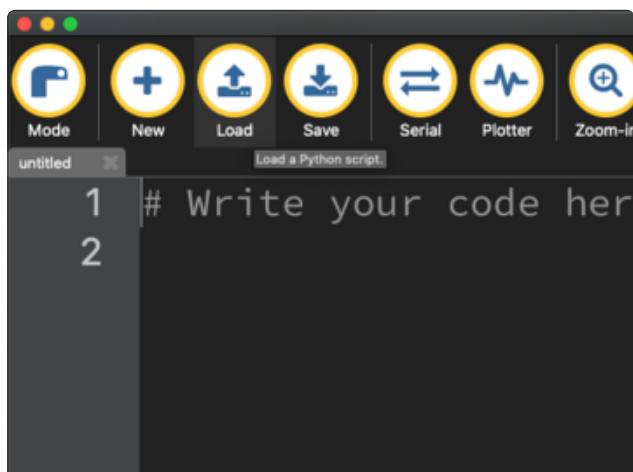

To edit code, open the code.py file on your CIRCUITPY drive into your editor.

Make the desired changes to your code.  
Save the file. That's it!

Your code changes are run as soon as the file is done saving.

There's one warning before you continue...

Don't click reset or unplug your board!

The CircuitPython code on your board detects when the files are changed or written and will automatically re-start your code. This makes coding very fast because you save, and it re-runs. If you unplug or reset the board before your computer finishes writing the file to your board, you can corrupt the drive. If this happens, you may lose the code you've written, so it's important to backup your code to your computer regularly.

There are a couple of ways to avoid filesystem corruption.

## 1. Use an editor that writes out the file completely when you save it.

Check out the [Recommended Editors page](https://adafru.it/Vue) (<https://adafru.it/Vue>) for details on different editing options.

If you are dragging a file from your host computer onto the CIRCUITPY drive, you still need to do step 2. Eject or Sync (below) to make sure the file is completely written.

## 2. Eject or Sync the Drive After Writing

If you are using one of our not-recommended-editors, not all is lost! You can still make it work.

On Windows, you can Eject or Safe Remove the CIRCUITPY drive. It won't actually eject, but it will force the operating system to save your file to disk. On Linux, use the sync command in a terminal to force the write to disk.

You also need to do this if you use Windows Explorer or a Linux graphical file manager to drag a file onto CIRCUITPY.

---

## Oh No I Did Something Wrong and Now The CIRCUITPY Drive Doesn't Show Up!!!

Don't worry! Corrupting the drive isn't the end of the world (or your board!). If this happens, follow the steps found on the [Troubleshooting](https://adafru.it/Den) (<https://adafru.it/Den>) page of every board guide to get your board up and running again.

---

## Back to Editing Code...

Now! Let's try editing the program you added to your board. Open your code.py file into your editor. You'll make a simple change. Change the first `0.5` to `0.1`. The code should look like this:

```
import board
import digitalio
import time

led = digitalio.DigitalInOut(board.LED)
led.direction = digitalio.Direction.OUTPUT

while True:
    led.value = True
```

```
time.sleep(0.1)
led.value = False
time.sleep(0.5)
```

Leave the rest of the code as-is. Save your file. See what happens to the LED on your board? Something changed! Do you know why?

You don't have to stop there! Let's keep going. Change the second `0.5` to `0.1` so it looks like this:

```
while True:
    led.value = True
    time.sleep(0.1)
    led.value = False
    time.sleep(0.1)
```

Now it blinks really fast! You decreased the both time that the code leaves the LED on and off!

Now try increasing both of the `0.1` to `1`. Your LED will blink much more slowly because you've increased the amount of time that the LED is turned on and off.

Well done! You're doing great! You're ready to start into new examples and edit them to see what happens! These were simple changes, but major changes are done using the same process. Make your desired change, save it, and get the results. That's really all there is to it!

## Naming Your Program File

CircuitPython looks for a code file on the board to run. There are four options: `code.txt`, `code.py`, `main.txt` and `main.py`. CircuitPython looks for those files, in that order, and then runs the first one it finds. While `code.py` is the recommended name for your code file, it is important to know that the other options exist. If your program doesn't seem to be updating as you work, make sure you haven't created another code file that's being read instead of the one you're working on.

## Exploring Your First CircuitPython Program

First, you'll take a look at the code you're editing.

Here is the original code again:

```
import board
import digitalio
import time

led = digitalio.DigitalInOut(board.LED)
led.direction = digitalio.Direction.OUTPUT

while True:
    led.value = True
    time.sleep(0.5)
    led.value = False
    time.sleep(0.5)
```

## Imports & Libraries

Each CircuitPython program you run needs to have a lot of information to work. The reason CircuitPython is so simple to use is that most of that information is stored in other files and works in the background. The files built into CircuitPython are called modules, and the files you load separately are called libraries. Modules are built into CircuitPython. Libraries are stored on your CIRCUITPY drive in a folder called lib.

```
import board
import digitalio
import time
```

The `import` statements tells the board that you're going to use a particular library or module in your code. In this example, you imported three modules: `board`, `digitalio`, and `time`. All three of these modules are built into CircuitPython, so no separate library files are needed. That's one of the things that makes this an excellent first example. You don't need anything extra to make it work!

These three modules each have a purpose. The first one, `board`, gives you access to the hardware on your board. The second, `digitalio`, lets you access that hardware as inputs/outputs. The third, `time`, lets you control the flow of your code in multiple ways, including passing time by 'sleeping'.

## Setting Up The LED

The next two lines setup the code to use the LED.

```
led = digitalio.DigitalInOut(board.LED)
led.direction = digitalio.Direction.OUTPUT
```

Your board knows the red LED as `LED`. So, you initialise that pin, and you set it to output. You set `led` to equal the rest of that information so you don't have to type it all out again later in our code.

## Loop-de-loops

The third section starts with a `while` statement. `while True:` essentially means, "forever do the following:". `while True:` creates a loop. Code will loop "while" the condition is "true" (vs. false), and as `True` is never False, the code will loop forever. All code that is indented under `while True:` is "inside" the loop.

Inside our loop, you have four items:

```
while True:  
    led.value = True  
    time.sleep(0.5)  
    led.value = False  
    time.sleep(0.5)
```

First, you have `led.value = True`. This line tells the LED to turn on. On the next line, you have `time.sleep(0.5)`. This line is telling CircuitPython to pause running code for 0.5 seconds. Since this is between turning the led on and off, the led will be on for 0.5 seconds.

The next two lines are similar. `led.value = False` tells the LED to turn off, and `time.sleep(0.5)` tells CircuitPython to pause for another 0.5 seconds. This occurs between turning the led off and back on so the LED will be off for 0.5 seconds too.

Then the loop will begin again, and continue to do so as long as the code is running!

So, when you changed the first `0.5` to `0.1`, you decreased the amount of time that the code leaves the LED on. So it blinks on really quickly before turning off!

Great job! You've edited code in a CircuitPython program!

## What Happens When My Code Finishes Running?

When your code finishes running, CircuitPython resets your microcontroller board to prepare it for the next run of code. That means any set up you did earlier no longer applies, and the pin states are reset.

For example, try reducing the code snippet above by eliminating the loop entirely, and replacing it with `led.value = True`. The LED will flash almost too quickly to see, and turn off. This is because the code finishes running and resets the pin state, and the LED is no longer receiving a signal.

To that end, most CircuitPython programs involve some kind of loop, infinite or otherwise.

## What if I Don't Have the Loop?

If you don't have the loop, the code will run to the end and exit. This can lead to some unexpected behavior in simple programs like this since the "exit" also resets the state of the hardware. This is a different behavior than running commands via REPL. So if you are writing a simple program that doesn't seem to work, you may need to add a loop to the end so the program doesn't exit.

The simplest loop would be:

```
while True:  
    pass
```

And remember - you can press CTRL+C to exit the loop.

See also the [Behavior section in the docs](https://adafru.it/Bvz) (<https://adafru.it/Bvz>).

---

## Connecting to the Serial Console

One of the staples of CircuitPython (and programming in general!) is something called a "print statement". This is a line you include in your code that causes your code to output text. A print statement in CircuitPython (and Python) looks like this:

```
print("Hello, world!")
```

This line in your code.py would result in:

```
Hello, world!
```


However, these print statements need somewhere to display. That's where the serial console comes in!

The serial console receives output from your CircuitPython board sent over USB and displays it so you can see it. This is necessary when you've included a print statement in your code and you'd like to see what you printed. It is also helpful for troubleshooting errors, because your board will send errors and the serial console will display those too.

The serial console requires an editor that has a built in terminal, or a separate terminal program. A terminal is a program that gives you a text-based interface to perform various tasks.

## Are you using Mu?

If so, good news! The serial console is built into Mu and will autodetect your board making using the serial console really really easy.

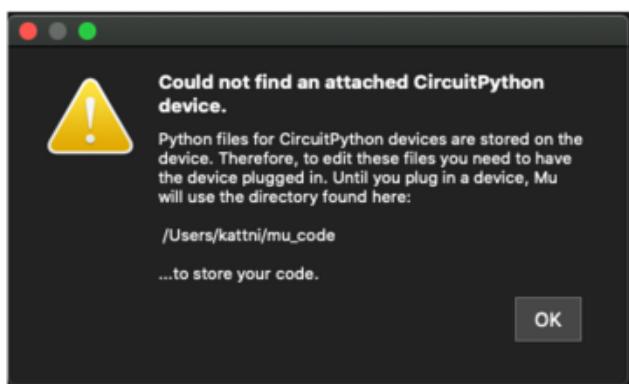


First, make sure your CircuitPython board is plugged in.


If you open Mu without a board plugged in, you may encounter the error seen here, letting you know no CircuitPython board was found and indicating where your code will be stored until you plug in a board.

If you are using Windows 7, make sure you installed the drivers (<https://adafru.it/VuB>).

Once you've opened Mu with your board plugged in, look for the Serial button in the button bar and click it.

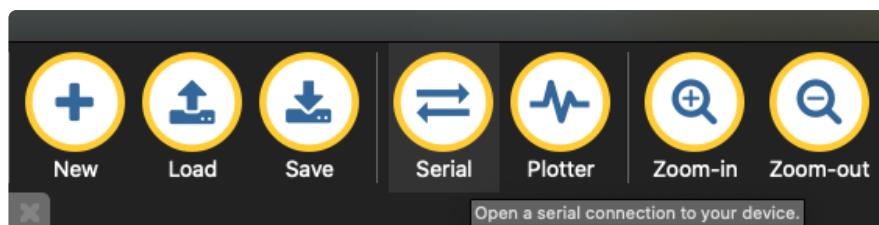

The Mu window will split in two, horizontally, and display the serial console at the bottom.

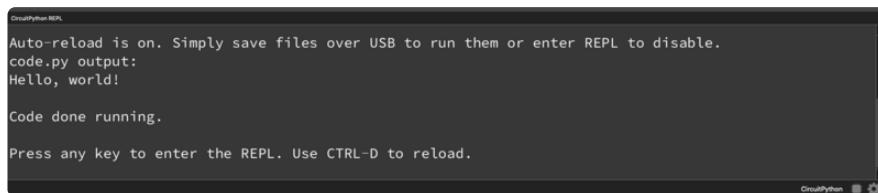

```
CircuitPython REPL
Auto-reload is on. Simply save files over USB to run them or enter REPL to disable.
code.py output:
Hello, world!

Code done running.

Press any key to enter the REPL. Use CTRL-D to reload.
```

If nothing appears in the serial console, it may mean your code is done running or has no print statements in it. Click into the serial console part of Mu, and press **CTRL+D** to reload.

## Serial Console Issues or Delays on Linux

If you're on Linux, and are seeing multi-second delays connecting to the serial console, or are seeing "AT" and other gibberish when you connect, then the **modemmanager** service might be interfering. Just remove it; it doesn't have much use unless you're still using dial-up modems.

To remove **modemmanager**, type the following command at a shell:

```
sudo apt purge modemmanager
```

## Setting Permissions on Linux

On Linux, if you see an error box something like the one below when you press the Serial button, you need to add yourself to a user group to have permission to connect to the serial console.



On Ubuntu and Debian, add yourself to the dialout group by doing:

```
sudo adduser $USER dialout
```

After running the command above, reboot your machine to gain access to the group. On other Linux distributions, the group you need may be different. See the [Advanced](#)

[Serial Console on Linux](https://adafru.it/VAO) (<https://adafru.it/VAO>) for details on how to add yourself to the right group.

## Using Something Else?

If you're not using Mu to edit, are using or if for some reason you are not a fan of its built in serial console, you can run the serial console from a separate program.

Windows requires you to download a terminal program. [Check out the Advanced Serial Console on Windows page for more details.](https://adafru.it/AAH) (<https://adafru.it/AAH>)

MacOS has Terminal built in, though there are other options available for download. [Check the Advanced Serial Console on Mac page for more details.](https://adafru.it/AAl) (<https://adafru.it/AAl>)

Linux has a terminal program built in, though other options are available for download. [Check the Advanced Serial Console on Linux page for more details.](https://adafru.it/VAO) (<https://adafru.it/VAO>)

Once connected, you'll see something like the following.

```
Auto-reload is on. Simply save files over USB to run them or enter REPL to disable.  
code.py output:  
Hello, world!  
  
Code done running.  
  
Press any key to enter the REPL. Use CTRL-D to reload.
```

---

## Interacting with the Serial Console

Once you've successfully connected to the serial console, it's time to start using it.

The code you wrote earlier has no output to the serial console. So, you're going to edit it to create some output.

Open your code.py file into your editor, and include a `print` statement. You can print anything you like! Just include your phrase between the quotation marks inside the parentheses. For example:


```
import board  
import digitalio  
import time
```

```
led = digitalio.DigitalInOut(board.LED)
led.direction = digitalio.Direction.OUTPUT

while True:
    print("Hello, CircuitPython!")
    led.value = True
    time.sleep(1)
    led.value = False
    time.sleep(1)
```

Save your file.

Now, let's go take a look at the window with our connection to the serial console.

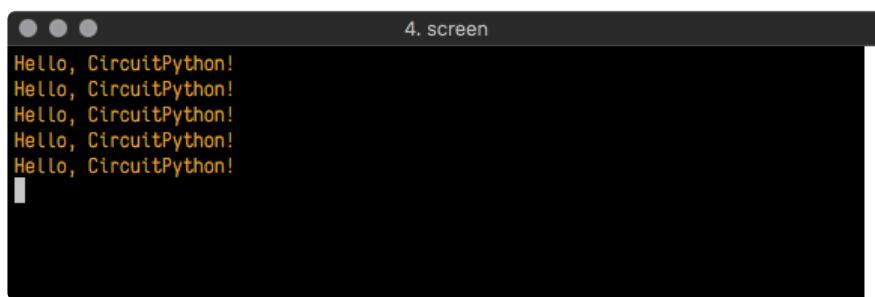


Excellent! Our print statement is showing up in our console! Try changing the printed text to something else.

```
import board
import digitalio
import time

led = digitalio.DigitalInOut(board.LED)
led.direction = digitalio.Direction.OUTPUT

while True:
    print("Hello back to you!")
    led.value = True
    time.sleep(1)
    led.value = False
    time.sleep(1)
```

Keep your serial console window where you can see it. Save your file. You'll see what the serial console displays when the board reboots. Then you'll see your new change!

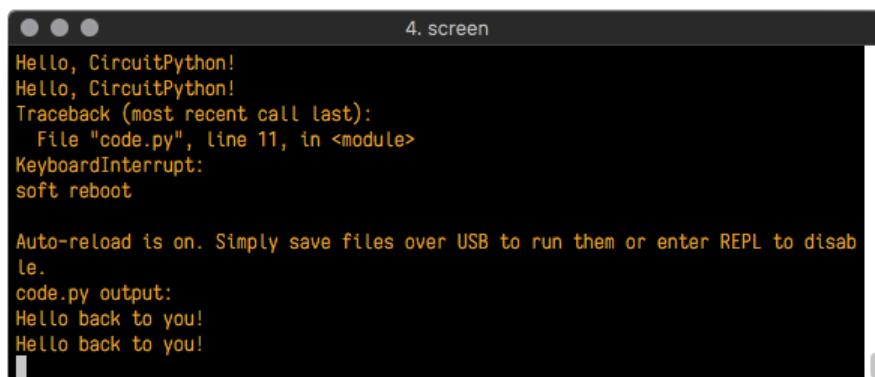

The `Traceback (most recent call last):` is telling you the last thing your board was doing before you saved your file. This is normal behavior and will happen every time the board resets. This is really handy for troubleshooting. Let's introduce an error so you can see how it is used.

Delete the `e` at the end of `True` from the line `led.value = True` so that it says `led.value = Tru`

```
import board
import digitalio
import time

led = digitalio.DigitalInOut(board.LED)
led.direction = digitalio.Direction.OUTPUT

while True:
    print("Hello back to you!")
    led.value = Tru
    time.sleep(1)
    led.value = False
    time.sleep(1)
```

Save your file. You will notice that your red LED will stop blinking, and you may have a colored status LED blinking at you. This is because the code is no longer correct and can no longer run properly. You need to fix it!

Usually when you run into errors, it's not because you introduced them on purpose. You may have 200 lines of code, and have no idea where your error could be hiding. This is where the serial console can help. Let's take a look!

The screenshot shows a terminal window titled "5. screen". The terminal output is as follows:


```
Hello back to you!
Traceback (most recent call last):
  File "code.py", line 13, in <module>
KeyboardInterrupt:
soft reboot

Auto-reload is on. Simply save files over USB to run them or enter REPL to disable.
code.py output:
Hello back to you!
Traceback (most recent call last):
  File "code.py", line 10, in <module>
NameError: name 'Tru' is not defined

Press any key to enter the REPL. Use CTRL-D to reload.
```

The `Traceback (most recent call last):` is telling you that the last thing it was able to run was `line 10` in your code. The next line is your error: `NameError: name 'Tru' is not defined`. This error might not mean a lot to you, but combined with knowing the issue is on line 10, it gives you a great place to start!

Go back to your code, and take a look at line 10. Obviously, you know what the problem is already. But if you didn't, you'd want to look at line 10 and see if you could figure it out. If you're still unsure, try googling the error to get some help. In this case, you know what to look for. You spelled True wrong. Fix the typo and save your file.

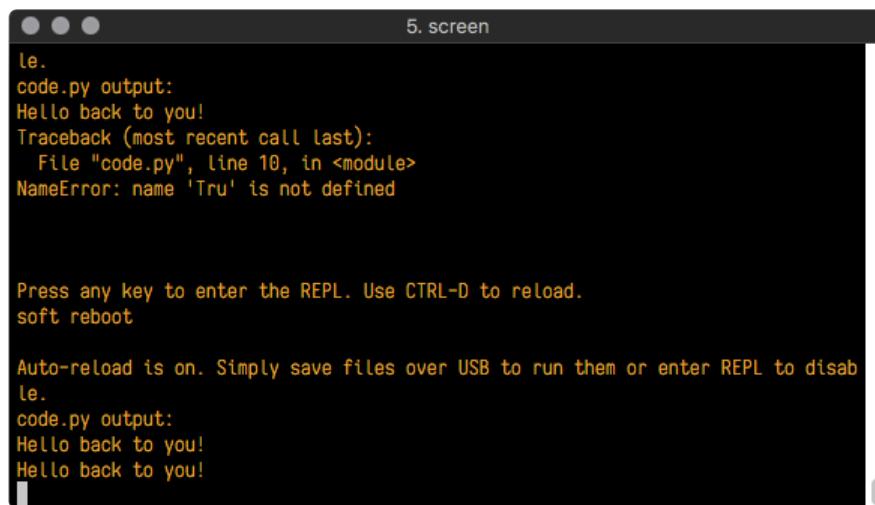

```
5. screen
le.
code.py output:
Hello back to you!
Traceback (most recent call last):
  File "code.py", line 10, in <module>
    NameError: name 'Tru' is not defined

Press any key to enter the REPL. Use CTRL-D to reload.
soft reboot

Auto-reload is on. Simply save files over USB to run them or enter REPL to disable.
code.py output:
Hello back to you!
Hello back to you!
```

Nice job fixing the error! Your serial console is streaming and your red LED is blinking again.

The serial console will display any output generated by your code. Some sensors, such as a humidity sensor or a thermistor, receive data and you can use print statements to display that information. You can also use print statements for troubleshooting, which is called "print debugging". Essentially, if your code isn't working, and you want to know where it's failing, you can put print statements in various places to see where it stops printing.

The serial console has many uses, and is an amazing tool overall for learning and programming!

---

## The REPL

The other feature of the serial connection is the Read-Evaluate-Print-Loop, or REPL. The REPL allows you to enter individual lines of code and have them run immediately. It's really handy if you're running into trouble with a particular program and can't figure out why. It's interactive so it's great for testing new ideas.

## Entering the REPL

To use the REPL, you first need to be connected to the serial console. Once that connection has been established, you'll want to press CTRL+C.

If there is code running, in this case code measuring distance, it will stop and you'll see `Press any key to enter the REPL. Use CTRL-D to reload.`. Follow those instructions, and press any key on your keyboard.

The `Traceback (most recent call last):` is telling you the last thing your board was doing before you pressed Ctrl + C and interrupted it. The `KeyboardInterrupt` is you pressing CTRL+C. This information can be handy when troubleshooting, but for now, don't worry about it. Just note that it is expected behavior.

```
Distance: 14.8 cm
Distance: 6.7 cm
Distance: 3.9 cm
Distance: 3.4 cm
Distance: 6.5 cm
Traceback (most recent call last):
  File "code.py", line 43, in <module>
KeyboardInterrupt:

Code done running.

Press any key to enter the REPL. Use CTRL-D to reload.
```

If your code.py file is empty or does not contain a loop, it will show an empty output and `Code done running.`. There is no information about what your board was doing before you interrupted it because there is no code running.

```
Auto-reload is on. Simply save files over USB to run them or enter REPL to disable.
code.py output:

Code done running.

Press any key to enter the REPL. Use CTRL-D to reload.
```

If you have no code.py on your CIRCUITPY drive, you will enter the REPL immediately after pressing CTRL+C. Again, there is no information about what your board was doing before you interrupted it because there is no code running.

```
Auto-reload is on. Simply save files over USB to run them or enter REPL to disable.
code.py output:

Code done running.

Press any key to enter the REPL. Use CTRL-D to reload.
```

Regardless, once you press a key you'll see a `>>>` prompt welcoming you to the REPL!



A screenshot of a Mac OS X terminal window titled "Default (tio)". The window contains the text "Adafruit CircuitPython 7.0.0 on 2021-10-26; Adafruit Feather RP2040 with rp2040" followed by a yellow `>>>` prompt.

If you have trouble getting to the `>>>` prompt, try pressing Ctrl + C a few more times.

The first thing you get from the REPL is information about your board.

```
Adafruit CircuitPython 7.0.0 on 2021-10-26; Adafruit Feather RP2040 with rp2040
```

This line tells you the version of CircuitPython you're using and when it was released. Next, it gives you the type of board you're using and the type of microcontroller the board uses. Each part of this may be different for your board depending on the versions you're working with.

This is followed by the CircuitPython prompt.

```
>>>
```

## Interacting with the REPL


From this prompt you can run all sorts of commands and code. The first thing you'll do is run `help()`. This will tell you where to start exploring the REPL. To run code in the REPL, type it in next to the REPL prompt.

Type `help()` next to the prompt in the REPL.



A screenshot of a Mac OS X terminal window titled "Default (tio)". The window contains the text "Adafruit CircuitPython 7.0.0 on 2021-10-26; Adafruit Feather RP2040 with rp2040" followed by a yellow `>>> help()` command.

Then press enter. You should then see a message.

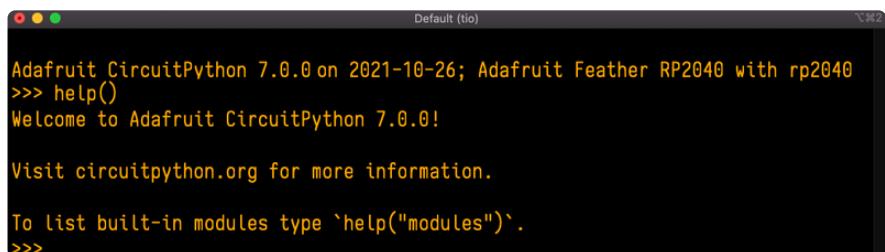

A screenshot of a Mac OS X terminal window titled "Default (tio)". The window contains the text "Adafruit CircuitPython 7.0.0 on 2021-10-26; Adafruit Feather RP2040 with rp2040", a yellow `>>> help()` command, and a yellow message "Welcome to Adafruit CircuitPython 7.0.0!". It also includes the text "Visit circuitpython.org for more information." and "To list built-in modules type `help('modules')`." followed by a yellow `>>>` prompt.

First part of the message is another reference to the version of CircuitPython you're using. Second, a URL for the CircuitPython related project guides. Then... wait. What's this? **To list built-in modules type `help("modules")`**. Remember the modules you learned about while going through creating code? That's exactly what this is talking about! This is a perfect place to start. Let's take a look!

Type `help("modules")` into the REPL next to the prompt, and press enter.

```
>>> help("modules")
__main__      board          micropython    storage
_bleio        builtins       msgpack         struct
adafruit_bus_device   collections  busio          neopixel_write supervisor
adafruit_pixelbuf   countio       onewireio     synthio
aesio          digitalio     paralleldisplay terminalio
alarm          displayio     pulseio        time
analogio       errno         pwmio          touchio
array          fontio        qio             traceback
atexit         framebufferio rainbowio      ulab
audiobusio     gc            random         usb_cdc
audiocore      getpass       re              usb_hid
audiomixer     imagecapture rgbmatrix     usb_midi
audiomp3       io            rotaryio      vectorio
audiopwmio     json          rp2pio        watchdog
binascii       keypad        rtc            sdcardio
bitbangio      keypad        sdcardio      sharpdisplay
bitmaptools    math          sdcardio      Plus any modules on the filesystem
bitops         microcontroller
>>>
```

This is a list of all the core modules built into CircuitPython, including `board`. Remember, `board` contains all of the pins on the board that you can use in your code. From the REPL, you are able to see that list!

Type `import board` into the REPL and press enter. It'll go to a new prompt. It might look like nothing happened, but that's not the case! If you recall, the `import` statement simply tells the code to expect to do something with that module. In this case, it's telling the REPL that you plan to do something with that module.

```
>>> import board
>>>
```

Next, type `dir(board)` into the REPL and press enter.

```
>>> dir(board)
['__class__', '__name__', 'A0', 'A1', 'A2', 'A3', 'D0', 'D1', 'D10', 'D11', 'D12', 'D13',
'D24', 'D25', 'D4', 'D5', 'D6', 'D9', 'I2C', 'LED', 'MISO', 'MOSI', 'NEOPIXEL', 'RX', 'SCK',
'SCL', 'SDA', 'SPI', 'TX', 'UART', 'board_id']
>>> |
```

This is a list of all of the pins on your board that are available for you to use in your code. Each board's list will differ slightly depending on the number of pins available. Do you see `LED`? That's the pin you used to blink the red LED!

The REPL can also be used to run code. Be aware that any code you enter into the REPL isn't saved anywhere. If you're testing something new that you'd like to keep, make sure you have it saved somewhere on your computer as well!

Every programmer in every programming language starts with a piece of code that says, "Hello, World." You're going to say hello to something else. Type into the REPL:

```
print("Hello, CircuitPython!")
```

Then press enter.

```
>>> print("Hello, CircuitPython")
Hello, CircuitPython
>>> |
```

That's all there is to running code in the REPL! Nice job!

You can write single lines of code that run stand-alone. You can also write entire programs into the REPL to test them. Remember that nothing typed into the REPL is saved.

There's a lot the REPL can do for you. It's great for testing new ideas if you want to see if a few new lines of code will work. It's fantastic for troubleshooting code by entering it one line at a time and finding out where it fails. It lets you see what modules are available and explore those modules.

Try typing more into the REPL to see what happens!

Everything typed into the REPL is ephemeral. Once you reload the REPL or return to the serial console, nothing you typed will be retained in any memory space. So be sure to save any desired code you wrote somewhere else, or you'll lose it when you leave the current REPL instance!

## Returning to the Serial Console

When you're ready to leave the REPL and return to the serial console, simply press CT RL+D. This will reload your board and reenter the serial console. You will restart the program you had running before entering the REPL. In the console window, you'll see any output from the program you had running. And if your program was affecting anything visual on the board, you'll see that start up again as well.

You can return to the REPL at any time!




## CircuitPython Libraries

As CircuitPython development continues and there are new releases, Adafruit will stop supporting older releases. Visit <https://circuitpython.org/downloads> to download the latest version of CircuitPython for your board. You must download the CircuitPython Library Bundle that matches your version of CircuitPython. Please update CircuitPython and then visit <https://circuitpython.org/libraries> to download the latest Library Bundle.

Each CircuitPython program you run needs to have a lot of information to work. The reason CircuitPython is so simple to use is that most of that information is stored in other files and works in the background. These files are called libraries. Some of them are built into CircuitPython. Others are stored on your CIRCUITPY drive in a folder called lib. Part of what makes CircuitPython so great is its ability to store code separately from the firmware itself. Storing code separately from the firmware makes it easier to update both the code you write and the libraries you depend.

Your board may ship with a lib folder already, it's in the base directory of the drive. If not, simply create the folder yourself. When you first install CircuitPython, an empty lib directory will be created for you.

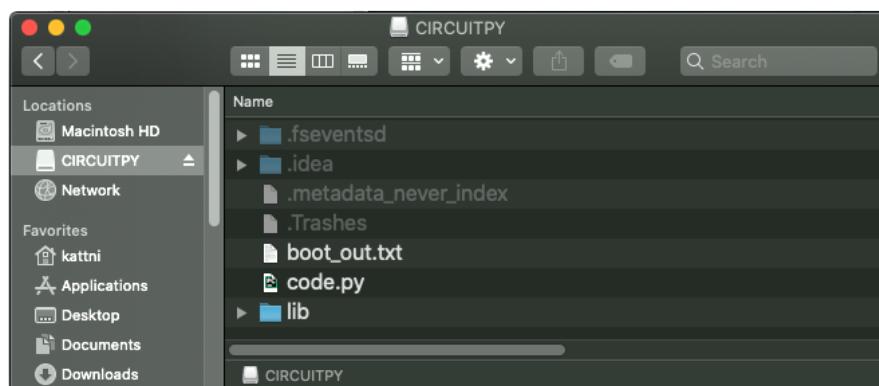

CircuitPython libraries work in the same way as regular Python modules so the [Python docs \(https://adafru.it/rar\)](https://adafru.it/rar) are an excellent reference for how it all should work. In

Python terms, you can place our library files in the lib directory because it's part of the Python path by default.

One downside of this approach of separate libraries is that they are not built in. To use them, one needs to copy them to the CIRCUITPY drive before they can be used. Fortunately, there is a library bundle.

The bundle and the library releases on GitHub also feature optimized versions of the libraries with the .mpy file extension. These files take less space on the drive and have a smaller memory footprint as they are loaded.

Due to the regular updates and space constraints, Adafruit does not ship boards with the entire bundle. Therefore, you will need to load the libraries you need when you begin working with your board. You can find example code in the guides for your board that depends on external libraries.

Either way, as you start to explore CircuitPython, you'll want to know how to get libraries on board.

## The Adafruit Learn Guide Project Bundle

The quickest and easiest way to get going with a project from the Adafruit Learn System is by utilising the Project Bundle. Most guides now have a Download Project Bundle button available at the top of the full code example embed. This button downloads all the necessary files, including images, etc., to get the guide project up and running. Simply click, open the resulting zip, copy over the right files, and you're good to go!

The first step is to find the Download Project Bundle button in the guide you're working on.

The Download Project Bundle button is only available on full demo code embedded from GitHub in a Learn guide. Code snippets will NOT have the button available.



## Circuit Playground Express: Piano in the Key of Lime

By Kattni Rembor

Create a full scale tone piano using CircuitPython, capacitive touch and some cute little fruits.

[Download Project Bundle](#)

[Copy Code](#)


```
# SPDX-FileCopyrightText: 2017 Kattni Rembor for Adafruit Industries
#
# SPDX-License-Identifier: MIT

from adafruit_circuitplayground import cp

while True:
    if cp.switch:
        print("Slide switch off!")
        cp.pixels.fill((0, 0, 0))
```

When you copy the contents of the Project Bundle to your CIRCUITPY drive, it will replace all the existing content! If you don't want to lose anything, ensure you copy your current code to your computer before you copy over the new Project Bundle content!

The Download Project Bundle button downloads a zip file. This zip contains a series of directories, nested within which is the code.py, any applicable assets like images or audio, and the lib/ folder containing all the necessary libraries. The following zip was downloaded from the [Piano in the Key of Lime guide](https://adafru.it/-cW) (<https://adafru.it/-cW>).

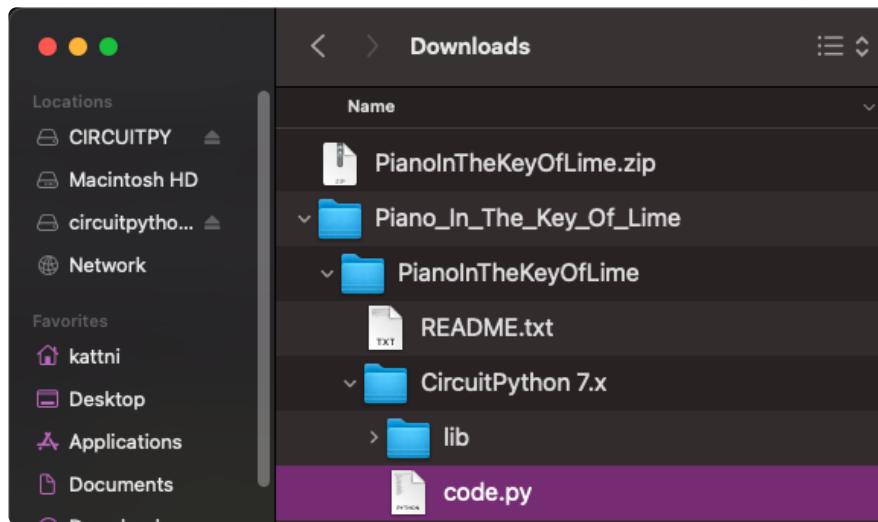

When you open the zip, you'll find some nested directories. Navigate through them until you find what you need. You'll eventually find a directory for your CircuitPython version (in this case, 7.x). In the version directory, you'll find the file and directory you need: code.py and lib/. Once you find the content you need, you can copy it all over to your CIRCUITPY drive, replacing any files already on the drive with the files from the freshly downloaded zip.

In some cases, there will be other files such as audio or images in the same directory as code.py and lib/. Make sure you include all the files when you copy things over!

Once you copy over all the relevant files, the project should begin running! If you find that the project is not running as expected, make sure you've copied ALL of the project files onto your microcontroller board.

That's all there is to using the Project Bundle!

## The Adafruit CircuitPython Library Bundle

Adafruit provides CircuitPython libraries for much of the hardware they provide, including sensors, breakouts and more. To eliminate the need for searching for each library individually, the libraries are available together in the Adafruit CircuitPython Library Bundle. The bundle contains all the files needed to use each library.

### Downloading the Adafruit CircuitPython Library Bundle

You can download the latest Adafruit CircuitPython Library Bundle release by clicking the button below. The libraries are being constantly updated and improved, so you'll always want to download the latest bundle.

Match up the bundle version with the version of CircuitPython you are running. For example, you would download the 6.x library bundle if you're running any version of CircuitPython 6, or the 7.x library bundle if you're running any version of CircuitPython 7, etc. If you mix libraries with major CircuitPython versions, you will get incompatible mpy errors due to changes in library interfaces possible during major version changes.

Click to visit [circuitpython.org](https://circuitpython.org) for the latest Adafruit CircuitPython Library Bundle

<https://adafru.it/ENC>

Download the bundle version that matches your CircuitPython firmware version. If you don't know the version, check the version info in boot\_out.txt file on the CIRCUITPY drive, or the initial prompt in the CircuitPython REPL. For example, if you're running v7.0.0, download the 7.x library bundle.

There's also a py bundle which contains the uncompressed python files, you probably don't want that unless you are doing advanced work on libraries.

## The CircuitPython Community Library Bundle

The CircuitPython Community Library Bundle is made up of libraries written and provided by members of the CircuitPython community. These libraries are often written when community members encountered hardware not supported in the Adafruit Bundle, or to support a personal project. The authors all chose to submit these libraries to the Community Bundle make them available to the community.

These libraries are maintained by their authors and are not supported by Adafruit. As you would with any library, if you run into problems, feel free to file an issue on the GitHub repo for the library. Bear in mind, though, that most of these libraries are supported by a single person and you should be patient about receiving a response. Remember, these folks are not paid by Adafruit, and are volunteering their personal time when possible to provide support.

## Downloading the CircuitPython Community Library Bundle

You can download the latest CircuitPython Community Library Bundle release by clicking the button below. The libraries are being constantly updated and improved, so you'll always want to download the latest bundle.


Click for the latest CircuitPython Community Library Bundle release

<https://adafru.it/VCn>


The link takes you to the latest release of the CircuitPython Community Library Bundle on GitHub. There are multiple versions of the bundle available. Download the bundle version that matches your CircuitPython firmware version. If you don't know the version, check the version info in boot\_out.txt file on the CIRCUITPY drive, or the initial prompt in the CircuitPython REPL. For example, if you're running v7.0.0, download the 7.x library bundle.

# Understanding the Bundle


After downloading the zip, extract its contents. This is usually done by double clicking on the zip. On Mac OSX, it places the file in the same directory as the zip.

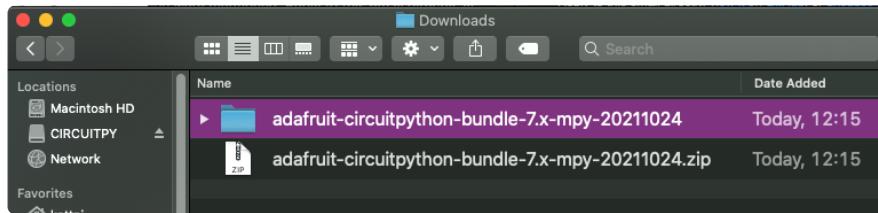

Open the bundle folder. Inside you'll find two information files, and two folders. One folder is the lib bundle, and the other folder is the examples bundle.

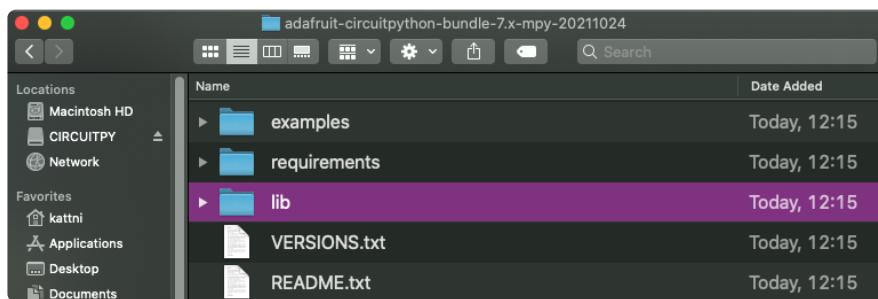


Now open the lib folder. When you open the folder, you'll see a large number of .mpy files, and folders.

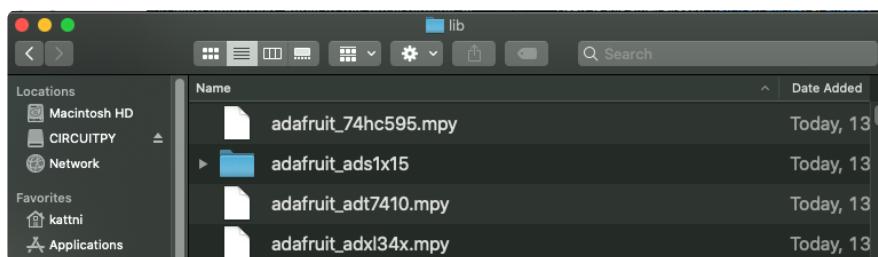

## Example Files

All example files from each library are now included in the bundles in an examples directory (as seen above), as well as an examples-only bundle. These are included for two main reasons:

- Allow for quick testing of devices.
- Provide an example base of code, that is easily built upon for individualized purposes.

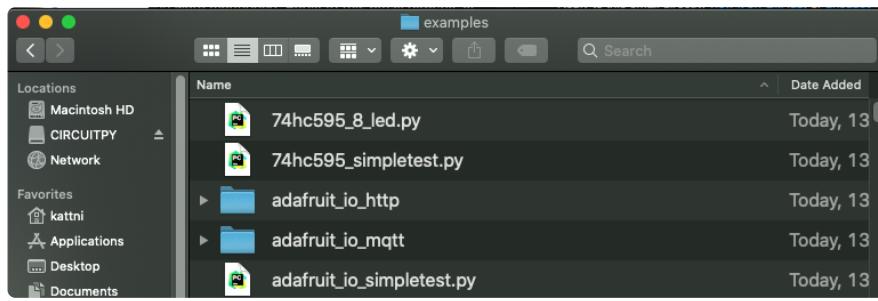

## Copying Libraries to Your Board

First open the lib folder on your CIRCUITPY drive. Then, open the lib folder you extracted from the downloaded zip. Inside you'll find a number of folders and .mpy files. Find the library you'd like to use, and copy it to the lib folder on CIRCUITPY.

If the library is a directory with multiple .mpy files in it, be sure to copy the entire folder to CIRCUITPY/lib.

This also applies to example files. Open the examples folder you extracted from the downloaded zip, and copy the applicable file to your CIRCUITPY drive. Then, rename it to code.py to run it.

If a library has multiple .mpy files contained in a folder, be sure to copy the entire folder to CIRCUITPY/lib.

## Understanding Which Libraries to Install

You now know how to load libraries on to your CircuitPython-compatible microcontroller board. You may now be wondering, how do you know which libraries you need to install? Unfortunately, it's not always straightforward. Fortunately, there is an obvious place to start, and a relatively simple way to figure out the rest. First up: the best place to start.

When you look at most CircuitPython examples, you'll see they begin with one or more `import` statements. These typically look like the following:

- `import library_or_module`

However, `import` statements can also sometimes look like the following:

- `from library_or_module import name`
- `from library_or_module.subpackage import name`
- `from library_or_module import name as local_name`

They can also have more complicated formats, such as including a `try / except` block, etc.

The important thing to know is that an `import` statement will always include the name of the module or library that you're importing.

Therefore, the best place to start is by reading through the `import` statements.

Here is an example import list for you to work with in this section. There is no setup or other code shown here, as the purpose of this section involves only the import list.

```
import time
import board
import neopixel
import adafruit_lis3dh
import usb_hid
from adafruit_hid.consumer_control import ConsumerControl
from adafruit_hid.consumer_control_code import ConsumerControlCode
```

Keep in mind, not all imported items are libraries. Some of them are almost always built-in CircuitPython modules. How do you know the difference? Time to visit the REPL.

In the [Interacting with the REPL section](https://adafru.it/Awz) (<https://adafru.it/Awz>) on [The REPL page](http://adafru.it/Awz) (<http://adafru.it/Awz>) in this guide, the `help("modules")` command is discussed. This command provides a list of all of the built-in modules available in CircuitPython for your board. So, if you connect to the serial console on your board, and enter the REPL, you can run `help("modules")` to see what modules are available for your board. Then, as you read through the `import` statements, you can, for the purposes of figuring out which libraries to load, ignore the statement that import modules.

The following is the list of modules built into CircuitPython for the Feather RP2040. Your list may look similar or be anything down to a significant subset of this list for smaller boards.

```
>>> help("modules")
__main__      board      micropython    storage
_bleio        builtins   msgpack       struct
adafruit_bus_device  collections  busio        neopixel_write supervisor
adafruit_pixelbuf  countio     onewireio   synthio
alarm         digitalio  os           sys
analogio     displayio  paralleldisplay terminalio
array         errno      pulseio     time
atexit        fontio     pwmio      touchio
audiobusio   framebufferio rainbowio   traceback
audiocore    gc          random     ubl
audiomixer   getpass    rgbmatrix  usb_cdc
audiomixer   imagecapture rotaryio   usb_hid
audiomp3     io          rp2pio     usb_midi
audiopwmio   json       sdcardio   vectorio
binascii     keypad    rtc        watchdog
bitbangio   math       sharpdisplay
```

Now that you know what you're looking for, it's time to read through the import statements. The first two, `time` and `board`, are on the modules list above, so they're built-in.

The next one, `neopixel`, is not on the module list. That means it's your first library! So, you would head over to the bundle zip you downloaded, and search for neopixel. There is a neopixel.mpy file in the bundle zip. Copy it over to the lib folder on your CIRCUITPY drive. The following one, `adafruit_lis3dh`, is also not on the module list. Follow the same process for adafruit\_lis3dh, where you'll find adafruit\_lis3dh.mpy, and copy that over.

The fifth one is `usb_hid`, and it is in the modules list, so it is built in. Often all of the built-in modules come first in the import list, but sometimes they don't! Don't assume that everything after the first library is also a library, and verify each import with the modules list to be sure. Otherwise, you'll search the bundle and come up empty!

The final two imports are not as clear. Remember, when `import` statements are formatted like this, the first thing after the `from` is the library name. In this case, the library name is `adafruit_hid`. A search of the bundle will find an adafruit\_hid folder. When a library is a folder, you must copy the entire folder and its contents as it is in the bundle to the lib folder on your CIRCUITPY drive. In this case, you would copy the entire adafruit\_hid folder to your CIRCUITPY/lib folder.

Notice that there are two imports that begin with `adafruit_hid`. Sometimes you will need to import more than one thing from the same library. Regardless of how many times you import the same library, you only need to load the library by copying over the adafruit\_hid folder once.

That is how you can use your example code to figure out what libraries to load on your CircuitPython-compatible board!

There are cases, however, where libraries require other libraries internally. The internally required library is called a dependency. In the event of library dependencies, the easiest way to figure out what other libraries are required is to connect to the serial console and follow along with the `ImportError` printed there. The following is a very simple example of an `ImportError`, but the concept is the same for any missing library.

## Example: `ImportError` Due to Missing Library

If you choose to load libraries as you need them, or you're starting fresh with an existing example, you may end up with code that tries to use a library you haven't yet loaded. This section will demonstrate what happens when you try to utilise a library that you don't have loaded on your board, and cover the steps required to resolve the issue.

This demonstration will only return an error if you do not have the required library loaded into the lib folder on your CIRCUITPY drive.

Let's use a modified version of the Blink example.

```
import board
import time
import simpleio

led = simpleio.DigitalOut(board.LED)

while True:
    led.value = True
    time.sleep(0.5)
    led.value = False
    time.sleep(0.5)
```

Save this file. Nothing happens to your board. Let's check the serial console to see what's going on.



A screenshot of a terminal window titled "Default (tio)". The window displays the following text:

```
Auto-reload is on. Simply save files over USB to run them or enter REPL to disable.
code.py output:
Traceback (most recent call last):
  File "code.py", line 3, in <module>
    ImportError: no module named 'simpleio'

Code done running.

Press any key to enter the REPL. Use CTRL-D to reload.
```

You have an `ImportError`. It says there is `no module named 'simpleio'`. That's the one you just included in your code!

Click the link above to download the correct bundle. Extract the lib folder from the downloaded bundle file. Scroll down to find `simpleio.mpy`. This is the library file you're looking for! Follow the steps above to load an individual library file.

The LED starts blinking again! Let's check the serial console.



A screenshot of a terminal window titled "Default (tio)". The window contains the following text:

```
Press any key to enter the REPL. Use CTRL-D to reload.  
soft reboot  
  
Auto-reload is on. Simply save files over USB to run them or enter REPL to disable.  
code.py output:
```

No errors! Excellent. You've successfully resolved an `ImportError`!

If you run into this error in the future, follow along with the steps above and choose the library that matches the one you're missing.

## Library Install on Non-Express Boards

If you have an M0 non-Express board such as Trinket M0, Gemma M0, QT Py M0, or one of the M0 Trinkeys, you'll want to follow the same steps in the example above to install libraries as you need them. Remember, you don't need to wait for an `ImportError` if you know what library you added to your code. Open the library bundle you downloaded, find the library you need, and drag it to the lib folder on your CIRCUITPY drive.

You can still end up running out of space on your M0 non-Express board even if you only load libraries as you need them. There are a number of steps you can use to try to resolve this issue. You'll find suggestions on the [Troubleshooting page \(https://adafru.it/Den\)](https://adafru.it/Den).

## Updating CircuitPython Libraries and Examples

Libraries and examples are updated from time to time, and it's important to update the files you have on your CIRCUITPY drive.

To update a single library or example, follow the same steps above. When you drag the library file to your lib folder, it will ask if you want to replace it. Say yes. That's it!

A new library bundle is released every time there's an update to a library. Updates include things like bug fixes and new features. It's important to check in every so often to see if the libraries you're using have been updated.

## CircUp CLI Tool

There is a command line interface (CLI) utility called [CircUp](https://adafru.it/Tfi) (<https://adafru.it/Tfi>) that can be used to easily install and update libraries on your device. Follow the directions on the [install page within the CircUp learn guide](#) (<https://adafru.it/-Ad>). Once you've got it installed you run the command `circup update` in a terminal to interactively update all libraries on the connected CircuitPython device. See the [usage page in the CircUp guide](#) (<https://adafru.it/-Ah>) for a full list of functionality

---

# CircuitPython Documentation

You've learned about the CircuitPython built-in modules and external libraries. You know that you can find the modules in CircuitPython, and the libraries in the Library Bundles. There are guides available that explain the basics of many of the modules and libraries. However, there's sometimes more capabilities than are necessarily showcased in the guides, and often more to learn about a module or library. So, where can you find more detailed information? That's when you want to look at the API documentation.

The entire CircuitPython project comes with extensive documentation available on Read the Docs. This includes both the [CircuitPython core](#) (<https://adafru.it/Beg>) and the [Adafruit CircuitPython libraries](#) (<https://adafru.it/Tra>).

## CircuitPython Core Documentation

The [CircuitPython core documentation](#) (<https://adafru.it/Beg>) covers many of the details you might want to know about the CircuitPython core and related topics. It includes API and usage info, a design guide and information about porting CircuitPython to new boards, MicroPython info with relation to CircuitPython, and general information about the project.

The screenshot shows the Adafruit CircuitPython API Reference documentation. The left sidebar contains a navigation menu with sections: API AND USAGE (Core Modules, Supported Ports, Troubleshooting, Additional CircuitPython Libraries and Drivers on GitHub), DESIGN AND PORTING REFERENCE (Design Guide, Architecture, Porting, Adding `+io` support to other ports), MICROPYTHON SPECIFIC (MicroPython libraries, Glossary), and ABOUT THE PROJECT (CircuitPython). The main content area features the title "Adafruit CircuitPython API Reference" and a brief welcome message about low-level API reference documentation. Below this is a section titled "CircuitPython" featuring a logo of a purple snake coiled around the word "circuitpython". At the bottom of the page, there are several status indicators: "Build CI passing", "docs passing", "License MIT", "chat 4884 online", and "translated 60%".

The main page covers the basics including where to download CircuitPython, how to contribute, differences from MicroPython, information about the project structure, and a full table of contents for the rest of the documentation.

The list along the left side leads to more information about specific topics.

The first section is API and Usage. This is where you can find information about how to use individual built-in core modules, such as `time` and `digitalio`, details about the supported ports, suggestions for troubleshooting, and basic info and links to the library bundles. The Core Modules section also includes the Support Matrix, which is a table of which core modules are available on which boards.

The second section is Design and Porting Reference. It includes a design guide, architecture information, details on porting, and adding module support to other ports.

The third section is MicroPython Specific. It includes information on MicroPython and related libraries, and a glossary of terms.


The fourth and final section is About the Project. It includes further information including details on building, testing, and debugging CircuitPython, along with various other useful links including the Adafruit Community Code of Conduct.

Whether you're a seasoned pro or new to electronics and programming, you'll find a wealth of information to help you along your CircuitPython journey in the documentation!


# CircuitPython Library Documentation

The Adafruit CircuitPython libraries are documented in a very similar fashion. Each library has its own page on Read the Docs. There is a comprehensive list available [here](#) (<https://adafru.it/Tra>). Otherwise, to view the documentation for a specific library, you can visit the GitHub repository for the library, and find the link in the README.

For the purposes of this page, the [LED Animation library](#) (<https://adafru.it/O2d>) documentation will be featured. There are two links to the documentation in each library GitHub repo. The first one is the docs badge near the top of the README.

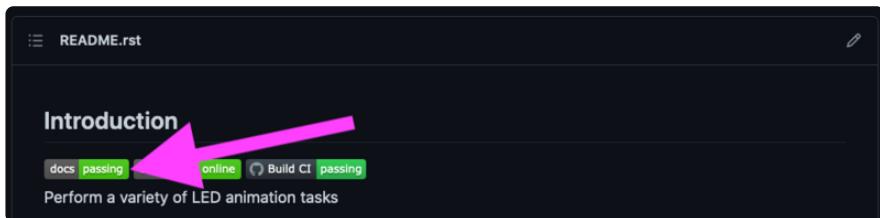


The second place is the Documentation section of the README. Scroll down to find it, and click on Read the Docs to get to the documentation.



Now that you know how to find it, it's time to take a look at what to expect.

Not all library documentation will look exactly the same, but this will give you some idea of what to expect from library docs.

The Introduction page is generated from the README, so it includes all the same info, such as PyPI installation instructions, a quick demo, and some build details. It also includes a full table of contents for the rest of the documentation (which is not part of the GitHub README). The page should look something like the following.

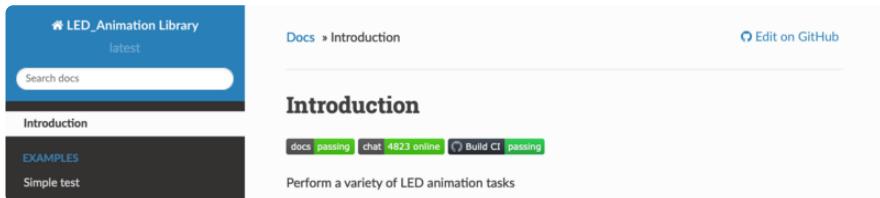

The left side contains links to the rest of the documentation, divided into three separate sections: Examples, API Reference, and Other Links.

## Examples

The [Examples section](https://adafru.it/VFD) (<https://adafru.it/VFD>) is a list of library examples. This list contains anywhere from a small selection to the full list of the examples available for the library.

This section will always contain at least one example - the simple test example.

A screenshot of a web browser displaying the Adafruit LED Animation Library documentation. The page title is "Simple test". The URL in the address bar is "Docs > Simple test". There is a "Edit on GitHub" button. On the left, there is a sidebar with links for "Introduction", "EXAMPLES", and "Simple test". The main content area has the heading "Simple test" and the sub-instruction "Ensure your device works with this simple test.".

The simple test example is usually a basic example designed to show your setup is working. It may require other libraries to run. Keep in mind, it's simple - it won't showcase a comprehensive use of all the library features.

The LED Animation simple test demonstrates the Blink animation.

### Simple test

Ensure your device works with this simple test.

`examples/led_animation_simpletest.py`

```
1 # SPDX-FileCopyrightText: 2021 Kattni Rembor for Adafruit Industries
2 # SPDX-License-Identifier: MIT
3
4 """
5 This simplest example displays the Blink animation.
6
7 For NeoPixel FeatherWing. Update pixel_pin and pixel_num to match your wiring if using
8 a different form of NeoPixels.
9 """
10 import board
11 import neopixel
12 from adafruit_led_animation.animation.blink import Blink
13 from adafruit_led_animation.color import RED
14
15 # Update to match the pin connected to your NeoPixels
16 pixel_pin = board.D6
17 # Update to match the number of NeoPixels you have connected
18 pixel_num = 32
19
20 pixels = neopixel.NeoPixel(pixel_pin, pixel_num, brightness=0.5, auto_write=False)
21
22 blink = Blink(pixels, speed=0.5, color=RED)
23
24 while True:
25     blink.animate()
```

In some cases, you'll find a longer list, that may include examples that explore other features in the library. The LED Animation documentation includes a series of examples, all of which are available in the library. These examples include demonstrations of both basic and more complex features. Simply click on the example that interests you to view the associated code.

The screenshot shows the 'EXAMPLES' section of the Adafruit Python library documentation. Under 'Basic Animations', there is a code snippet for 'examples/led\_animation\_basic\_animations.py'. The code is as follows:

```
1 # SPDX-FileCopyrightText: 2021 Kattni Rembor for Adafruit Industries
2 # SPDX-License-Identifier: MIT
3
4 """
5 This example displays the basic animations in sequence, at a five second interval.
6
```

When there are multiple links in the Examples section, all of the example content is, in actuality, on the same page. Each link after the first is an anchor link to the specified section of the page. Therefore, you can also view all the available examples by scrolling down the page.

You can view the rest of the examples by clicking through the list or scrolling down the page. These examples are fully working code. Which is to say, while they may rely on other libraries as well as the library for which you are viewing the documentation, they should not require modification to otherwise work.

## API Reference

The [API Reference section](https://adafru.it/Rqa) (<https://adafru.it/Rqa>) includes a list of the library functions and classes. The API (Application Programming Interface) of a library is the set of functions and classes the library provides. Essentially, the API defines how your program interfaces with the functions and classes that you call in your code to use the library.

There is always at least one list item included. Libraries for which the code is included in a single Python (.py) file, will only have one item. Libraries for which the code is multiple Python files in a directory (called subpackages) will have multiple items in this list. The LED Animation library has a series of subpackages, and therefore, multiple items in this list.

Click on the first item in the list to begin viewing the API Reference section.

The screenshot shows the 'adafruit\_led\_animation.animation' module page. The left sidebar lists submodules: 'Implementation Notes', 'adafruit\_led\_animation.color', 'adafruit\_led\_animation.helper', 'adafruit\_led\_animation.group', 'adafruit\_led\_animation.sequence', and 'adafruit\_led\_animation.animation.blink'. The main content area shows the module's docstring:

```
adafruit_led_animation.animation
```

Animation base class for CircuitPython helper library for LED animations.

As with the Examples section, all of the API Reference content is on a single page, and the links under API Reference are anchor links to the specified section of the page.

When you click on an item in the API Reference section, you'll find details about the classes and functions in the library. In the case of only one item in this section, all the available functionality of the library will be contained within that first and only subsection. However, in the case of a library that has subpackages, each item will contain the features of the particular subpackage indicated by the link. The documentation will cover all of the available functions of the library, including more complex ones that may not interest you.

The first list item is the animation subpackage. If you scroll down, you'll begin to see the available features of animation. They are listed alphabetically. Each of these things can be called in your code. It includes the name and a description of the specific function you would call, and if any parameters are necessary, lists those with a description as well.

```
class adafruit_led_animation.animation.Animation(pixel_object, speed, color, peers=None, paused=False, name=None)
```

Base class for animations.

```
add_cycle_complete_receiver(callback)
```

Adds an additional callback when the cycle completes.

**Parameters**

**callback** – Additional callback to trigger when a cycle completes. The callback is passed the animation object instance.

```
after_draw()
```

Animation subclasses may implement after\_draw() to do operations after the main draw() is called.

You can view the other subpackages by clicking the link on the left or scrolling down the page. You may be interested in something a little more practical. Here is an example. To use the LED Animation library Comet animation, you would run the following example.

```
# SPDX-FileCopyrightText: 2021 Kattni Rembor for Adafruit Industries
# SPDX-License-Identifier: MIT

"""
This example animates a jade comet that bounces from end to end of the strip.

For QT Py Haxpress and a NeoPixel strip. Update pixel_pin and pixel_num to match
your wiring if
using a different board or form of NeoPixels.

This example will run on SAMD21 (M0) Express boards (such as Circuit Playground
Express or QT Py
Haxpress), but not on SAMD21 non-Express boards (such as QT Py or Trinket).
"""

import board
import neopixel

from adafruit_led_animation.animation.comet import Comet
from adafruit_led_animation.color import JADE
```

```

# Update to match the pin connected to your NeoPixels
pixel_pin = board.A3
# Update to match the number of NeoPixels you have connected
pixel_num = 30

pixels = neopixel.NeoPixel(pixel_pin, pixel_num, brightness=0.5, auto_write=False)

comet = Comet(pixels, speed=0.02, color=JADE, tail_length=10, bounce=True)

while True:
    comet.animate()

```

Note the line where you create the `comet` object. There are a number of items inside the parentheses. In this case, you're provided with a fully working example. But what if you want to change how the comet works? The code alone does not explain what the options mean.

So, in the API Reference documentation list, click the [adafruit\\_led\\_animation.animation.comet](#) link and scroll down a bit until you see the following.

```

class adafruit_led_animation.animation.Comet(pixel_object, speed, color, tail_length=0, reverse=False,
bounce=False, name=None, ring=False)

```

A comet animation.

**Parameters**

- `pixel_object` – The initialised LED object.
- `speed (float)` – Animation speed in seconds, e.g. `0.1`.
- `color` – Animation color in `(r, g, b)` tuple, or `0x000000` hex format.
- `tail_length (int)` – The length of the comet. Defaults to 25% of the length of the `pixel_object`. Automatically compensates for a minimum of 2 and a maximum of the length of the `pixel_object`.
- `reverse (bool)` – Animates the comet in the reverse order. Defaults to `False`.
- `bounce (bool)` – Comet will bounce back and forth. Defaults to `True`.
- `ring (bool)` – Ring mode. Defaults to `False`.

Look familiar? It is! This is the documentation for setting up the comet object. It explains what each argument provided in the comet setup in the code meant, as well as the other available features. For example, the code includes `speed=0.02`. The documentation clarifies that this is the "Animation speed in seconds". The code doesn't include `ring`. The documentation indicates this is an available setting that enables "Ring mode".

This type of information is available for any function you would set up in your code. If you need clarification on something, wonder whether there's more options available, or are simply interested in the details involved in the code you're writing, check out the documentation for the CircuitPython libraries!

## Other Links

This section is the same for every library. It includes a list of links to external sites, which you can visit for more information about the CircuitPython Project and Adafruit.

That covers the CircuitPython library documentation! When you are ready to go beyond the basic library features covered in a guide, or you're interested in understanding those features better, the library documentation on Read the Docs has you covered!

---

## Recommended Editors

The CircuitPython code on your board detects when the files are changed or written and will automatically re-start your code. This makes coding very fast because you save, and it re-runs.

However, you must wait until the file is done being saved before unplugging or resetting your board! On Windows using some editors this can sometimes take up to 90 seconds, on Linux it can take 30 seconds to complete because the text editor does not save the file completely. Mac OS does not seem to have this delay, which is nice!

This is really important to be aware of. If you unplug or reset the board before your computer finishes writing the file to your board, you can corrupt the drive. If this happens, you may lose the code you've written, so it's important to backup your code to your computer regularly.

To avoid the likelihood of filesystem corruption, use an editor that writes out the file completely when you save it. Check out the list of recommended editors below.

### Recommended editors

- [mu](https://adafru.it/ANO) (<https://adafru.it/ANO>) is an editor that safely writes all changes (it's also our recommended editor!)
- [emacs](https://adafru.it/xNA) (<https://adafru.it/xNA>) is also an editor that will [fully write files on save](https://adafru.it/Be7) (<https://adafru.it/Be7>)
- [Sublime Text](https://adafru.it/xNB) (<https://adafru.it/xNB>) safely writes all changes
- [Visual Studio Code](https://adafru.it/Be9) (<https://adafru.it/Be9>) appears to safely write all changes
- gedit on Linux appears to safely write all changes

- [IDLE](https://adafru.it/IWB) (<https://adafru.it/IWB>), in Python 3.8.1 or later, [was fixed](https://adafru.it/IWD) (<https://adafru.it/IWD>) to write all changes immediately
- [thonny](https://adafru.it/Qb6) (<https://adafru.it/Qb6>) fully writes files on save

## Recommended only with particular settings or add-ons

- [vim](https://adafru.it/ek9) (<https://adafru.it/ek9>) / vi safely writes all changes. But set up vim to not write [swapfiles](https://adafru.it/ELO) (<https://adafru.it/ELO>) (.swp files: temporary records of your edits) to CIRCUITPY. Run vim with `vim -n`, set the `no swapfile` option, or set the `directory` option to write swapfiles elsewhere. Otherwise the swapfile writes trigger restarts of your program.
- The [PyCharm IDE](https://adafru.it/xNC) (<https://adafru.it/xNC>) is safe if "Safe Write" is turned on in Settings->System Settings->Synchronization (true by default).
- If you are using [Atom](https://adafru.it/fMG) (<https://adafru.it/fMG>), install the [fsync-on-save package](https://adafru.it/E9m) (<https://adafru.it/E9m>) or the [language-circuitpython package](https://adafru.it/Vuf) (<https://adafru.it/Vuf>) so that it will always write out all changes to files on CIRCUITPY.
- [SlickEdit](https://adafru.it/DdP) (<https://adafru.it/DdP>) works only if you [add a macro to flush the disk](https://adafru.it/ven) (<https://adafru.it/ven>).

The editors listed below are specifically NOT recommended!

## Editors that are NOT recommended

- notepad (the default Windows editor) and Notepad++ can be slow to write, so the editors above are recommended! If you are using notepad, be sure to eject the drive
- IDLE in Python 3.8.0 or earlier does not force out changes immediately
- nano (on Linux) does not force out changes
- geany (on Linux) does not force out changes
- Anything else - Other editors have not been tested so please use a recommended one!

# Advanced Serial Console on Windows

## Windows 7 and 8.1


If you're using Windows 7 (or 8 or 8.1), you'll need to install drivers. See the [Windows 7 and 8.1 Drivers page](#) (<https://adafru.it/VuB>) for details. You will not need to install drivers on Mac, Linux or Windows 10.

You are strongly encouraged to upgrade to Windows 10 if you are still using Windows 7 or Windows 8 or 8.1. Windows 7 has reached end-of-life and no longer receives security updates. A free upgrade to Windows 10 is [still available](#) (<https://adafru.it/RWc>).


## What's the COM?

First, you'll want to find out which serial port your board is using. When you plug your board in to USB on your computer, it connects to a serial port. The port is like a door through which your board can communicate with your computer using USB.

You'll use Windows Device Manager to determine which port the board is using. The easiest way to determine which port the board is using is to first check without the board plugged in. Open Device Manager. Click on Ports (COM & LPT). You should find something already in that list with (COM#) after it where # is a number.

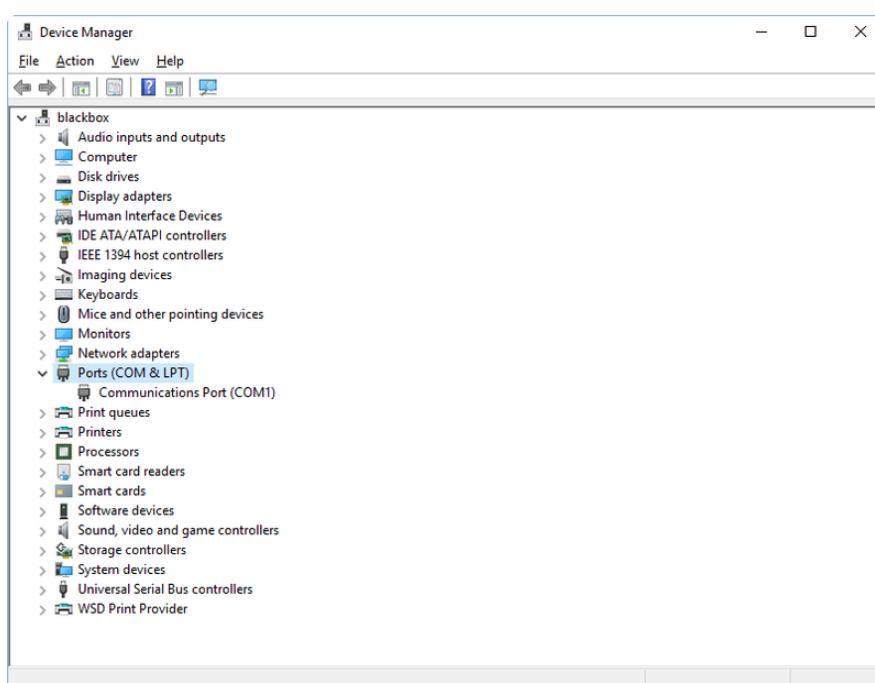

Now plug in your board. The Device Manager list will refresh and a new item will appear under Ports (COM & LPT). You'll find a different (COM#) after this item in the list.

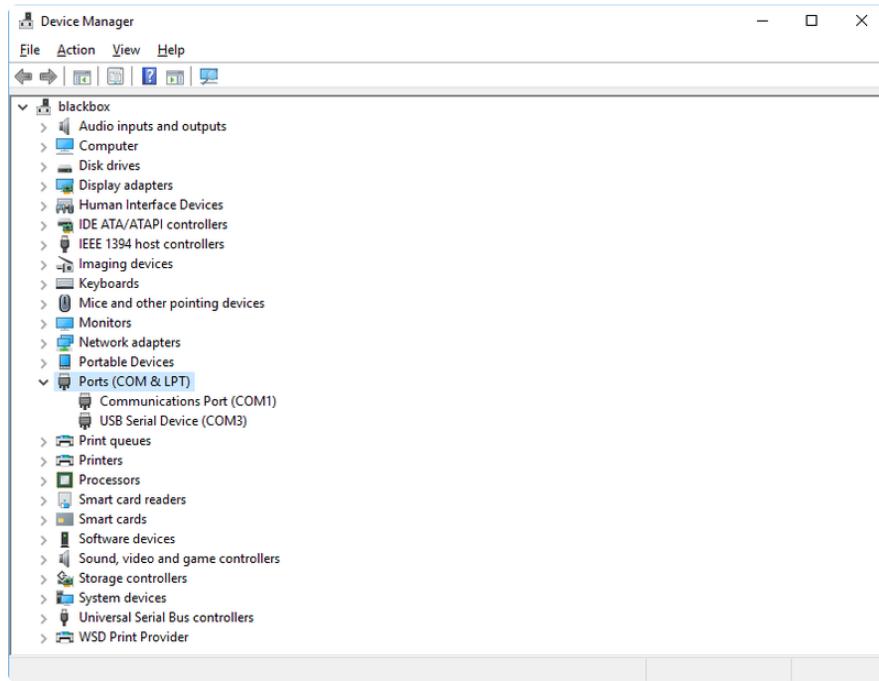

Sometimes the item will refer to the name of the board. Other times it may be called something like USB Serial Device, as seen in the image above. Either way, there is a new (COM#) following the name. This is the port your board is using.

## Install Putty

If you're using Windows, you'll need to download a terminal program. You're going to use PuTTY.


The first thing to do is download the [latest version of PuTTY \(<https://adafruit.it/Bf1>\)](https://adafruit.it/Bf1). You'll want to download the Windows installer file. It is most likely that you'll need the 64-bit version. Download the file and install the program on your machine. If you run into issues, you can try downloading the 32-bit version instead. However, the 64-bit version will work on most PCs.

Now you need to open PuTTY.


- Under Connection type: choose the button next to Serial.
- In the box under Serial line, enter the serial port you found that your board is using.

- In the box under Speed, enter 115200. This called the baud rate, which is the speed in bits per second that data is sent over the serial connection. For boards with built in USB it doesn't matter so much but for ESP8266 and other board with a separate chip, the speed required by the board is 115200 bits per second. So you might as well just use 115200!

If you want to save those settings for later, use the options under Load, save or delete a stored session. Enter a name in the box under Saved Sessions, and click the Save button on the right.

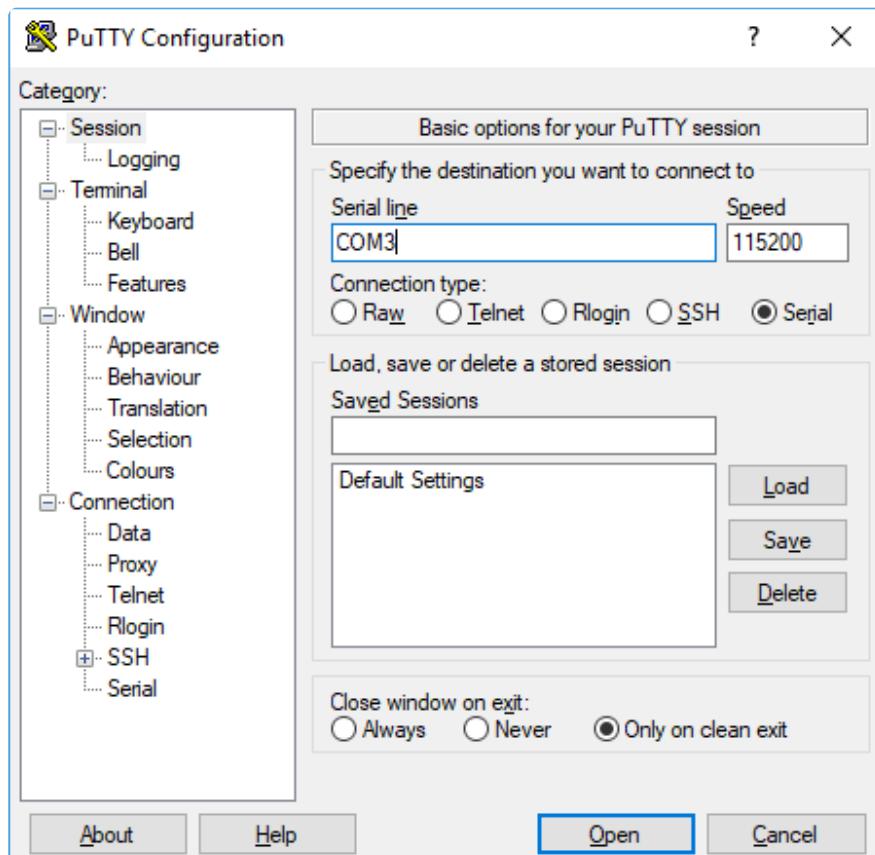

Once your settings are entered, you're ready to connect to the serial console. Click "Open" at the bottom of the window. A new window will open.

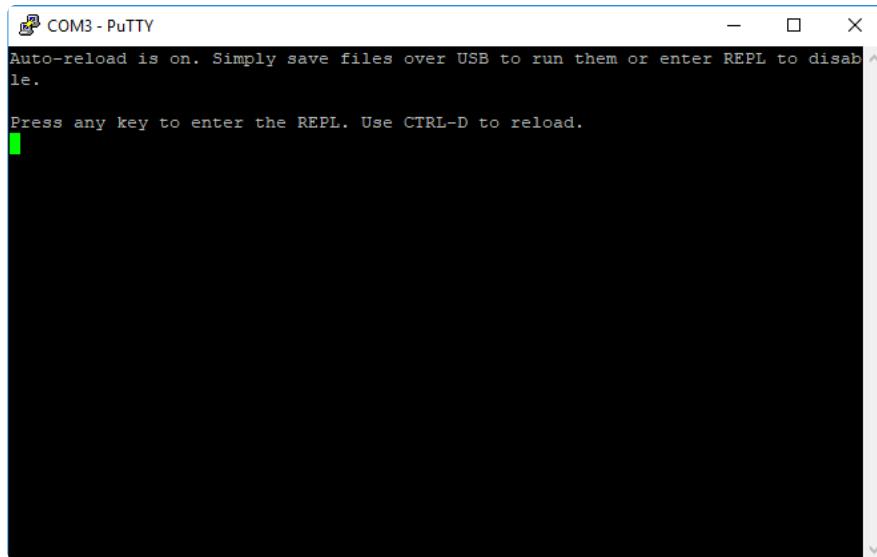

If no code is running, the window will either be blank or will look like the window above. Now you're ready to see the results of your code.

Great job! You've connected to the serial console!

---

## Advanced Serial Console on Mac

Connecting to the serial console on Mac does not require installing any drivers or extra software. You'll use a terminal program to find your board, and `screen` to connect to it. Terminal and `screen` both come installed by default.

### What's the Port?

First you'll want to find out which serial port your board is using. When you plug your board in to USB on your computer, it connects to a serial port. The port is like a door through which your board can communicate with your computer using USB.

The easiest way to determine which port the board is using is to first check without the board plugged in. Open Terminal and type the following:

```
ls /dev/tty.*
```

Each serial connection shows up in the `/dev/` directory. It has a name that starts with `tty`. . The command `ls` shows you a list of items in a directory. You can use `*` as a wildcard, to search for files that start with the same letters but end in something different. In this case, you're asking to see all of the listings in `/dev/` that start with `tty`. and end in anything. This will show us the current serial connections.

```
Last login: Fri Dec 8 17:55:09 on ttys003
1936 kattni@robocrepe:~ $ ls /dev/tty.*
/dev/tty.Bluetooth-Incoming-Port
1937 kattni@robocrepe:~ $
```

Now, plug your board. In Terminal, type:

```
ls /dev/tty.*
```

This will show you the current serial connections, which will now include your board.

```
Last login: Fri Dec 8 17:55:09 on ttys003
1936 kattni@robocrepe:~ $ ls /dev/tty.*
/dev/tty.Bluetooth-Incoming-Port
1937 kattni@robocrepe:~ $ ls /dev/tty.*
/dev/tty.Bluetooth-Incoming-Port /dev/tty.usbmodem141441
1937 kattni@robocrepe:~ $
```

A new listing has appeared called `/dev/tty.usbmodem141441`. The `tty.usbmodem141441` part of this listing is the name the example board is using. Yours will be called something similar.

Using Linux, a new listing has appeared called `/dev/ttym0`. The `ttym0` part of this listing is the name the example board is using. Yours will be called something similar.


## Connect with screen

Now that you know the name your board is using, you're ready connect to the serial console. You're going to use a command called `screen`. The `screen` command is

included with MacOS. To connect to the serial console, use Terminal. Type the following command, replacing `board_name` with the name you found your board is using:

```
screen /dev/tty.board_name 115200
```

The first part of this establishes using the `screen` command. The second part tells screen the name of the board you're trying to use. The third part tells screen what baud rate to use for the serial connection. The baud rate is the speed in bits per second that data is sent over the serial connection. In this case, the speed required by the board is 115200 bits per second.

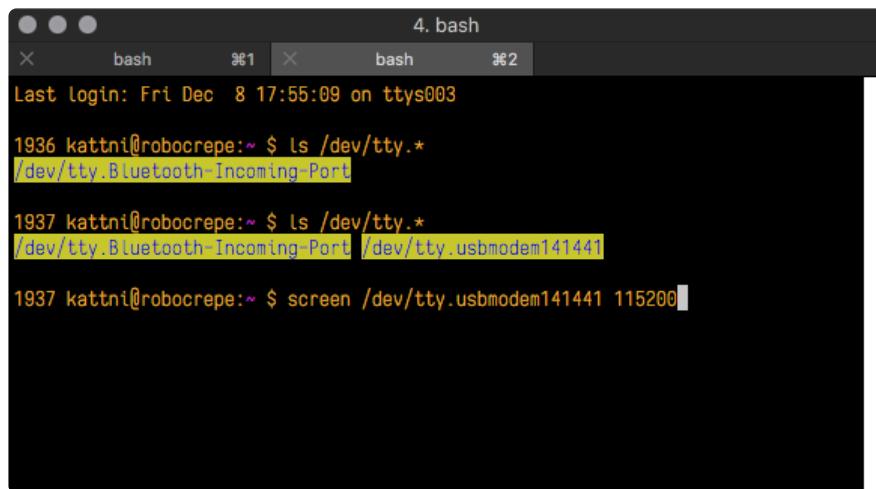

A screenshot of a Mac OS X terminal window titled "4. bash". The window has two tabs: "bash" and "%61" (which is "%62"). The terminal output shows:

```
Last Login: Fri Dec 8 17:55:09 on ttys003
1936 kattni@robocrepe:~ $ ls /dev/tty.*
/dev/tty.Bluetooth-Incoming-Port
1937 kattni@robocrepe:~ $ ls /dev/tty.*
/dev/tty.Bluetooth-Incoming-Port /dev/tty.usbmodem141441
1937 kattni@robocrepe:~ $ screen /dev/tty.usbmodem141441 115200
```

Press enter to run the command. It will open in the same window. If no code is running, the window will be blank. Otherwise, you'll see the output of your code.

Great job! You've connected to the serial console!

---

## Advanced Serial Console on Linux

Connecting to the serial console on Linux does not require installing any drivers, but you may need to install `screen` using your package manager. You'll use a terminal program to find your board, and `screen` to connect to it. There are a variety of terminal programs such as gnome-terminal (called Terminal) or Konsole on KDE.

The `tio` program works as well to connect to your board, and has the benefit of automatically reconnecting. You would need to install it using your package manager.

## What's the Port?


First you'll want to find out which serial port your board is using. When you plug your board in to USB on your computer, it connects to a serial port. The port is like a door through which your board can communicate with your computer using USB.

The easiest way to determine which port the board is using is to first check without the board plugged in. Open your terminal program and type the following:

```
ls /dev/ttyACM*
```

Each serial connection shows up in the /dev/ directory. It has a name that starts with ttyACM. The command `ls` shows you a list of items in a directory. You can use `*` as a wildcard, to search for files that start with the same letters but end in something different. In this case, You're asking to see all of the listings in /dev/ that start with ttyACM and end in anything. This will show us the current serial connections.

In the example below, the error is indicating that there are no current serial connections starting with ttyACM.

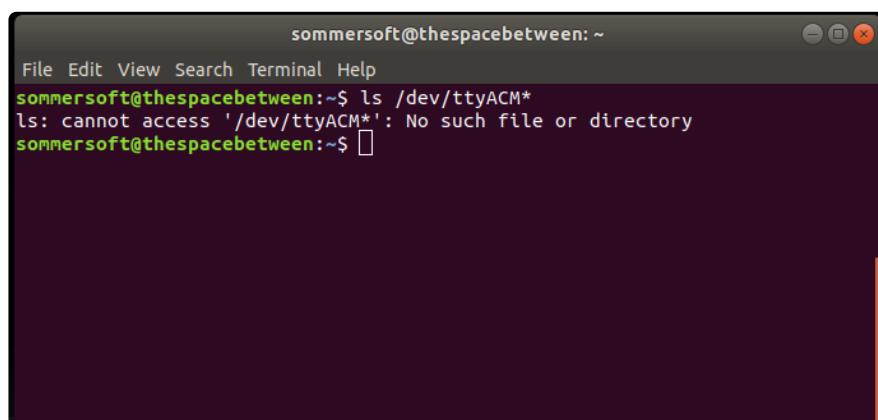
A screenshot of a terminal window titled "sommersoft@thespacebetween: ~". The window has a dark background and light-colored text. At the top, there is a menu bar with "File", "Edit", "View", "Search", "Terminal", and "Help". Below the menu, the command "sommersoft@thespacebetween:~\$ ls /dev/ttyACM\*" is typed, followed by its output: "ls: cannot access '/dev/ttyACM\*': No such file or directory". The cursor is shown as a small square icon at the end of the command line.

```
sommersoft@thespacebetween:~$ ls /dev/ttyACM*
ls: cannot access '/dev/ttyACM*': No such file or directory
sommersoft@thespacebetween:~$
```

Now plug in your board. In your terminal program, type:

```
ls /dev/ttyACM*
```

This will show you the current serial connections, which will now include your board.

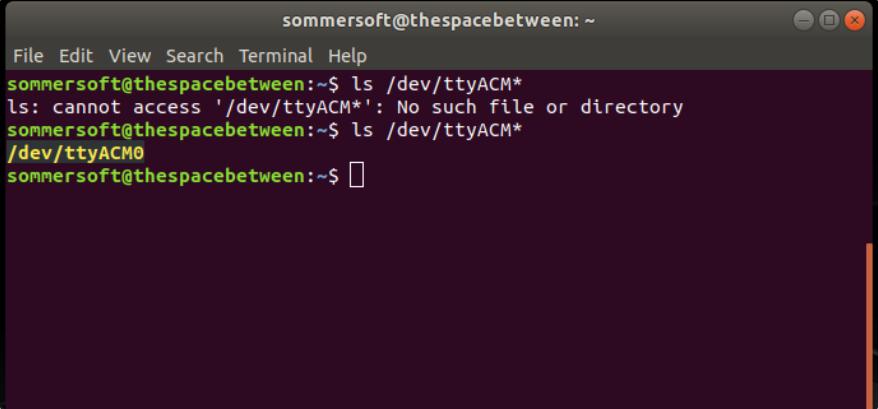

```
sommersoft@thespacebetween:~  
File Edit View Search Terminal Help  
sommersoft@thespacebetween:~$ ls /dev/ttyACM*  
ls: cannot access '/dev/ttyACM*': No such file or directory  
sommersoft@thespacebetween:~$ ls /dev/ttyACM*  
/dev/ttyACM0  
sommersoft@thespacebetween:~$
```

A new listing has appeared called /dev/ttyACM0. The ttyACM0 part of this listing is the name the example board is using. Yours will be called something similar.


## Connect with screen

Now that you know the name your board is using, you're ready connect to the serial console. You'll use a command called `screen`. You may need to install it using the package manager.

To connect to the serial console, use your terminal program. Type the following command, replacing `board_name` with the name you found your board is using:

```
screen /dev/tty.board_name 115200
```

The first part of this establishes using the `screen` command. The second part tells screen the name of the board you're trying to use. The third part tells screen what baud rate to use for the serial connection. The baud rate is the speed in bits per second that data is sent over the serial connection. In this case, the speed required by the board is 115200 bits per second.

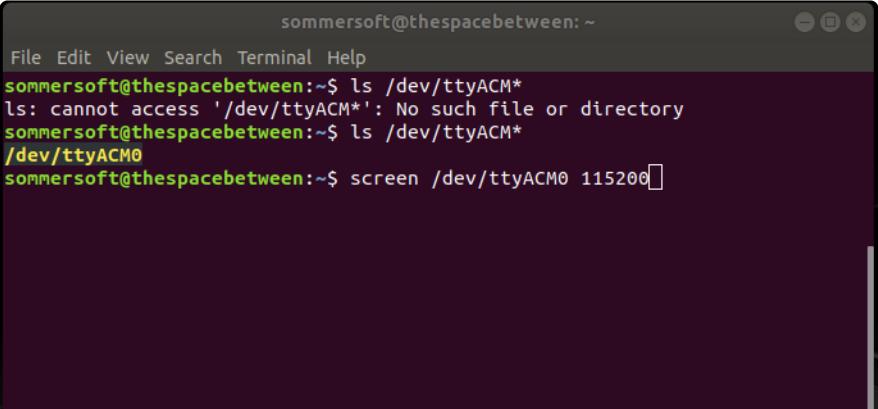


```
sommersoft@thespacebetween:~  
File Edit View Search Terminal Help  
sommersoft@thespacebetween:~$ ls /dev/ttyACM*  
ls: cannot access '/dev/ttyACM*': No such file or directory  
sommersoft@thespacebetween:~$ ls /dev/ttyACM*  
/dev/ttyACM0  
sommersoft@thespacebetween:~$ screen /dev/ttyACM0 115200
```

Press enter to run the command. It will open in the same window. If no code is running, the window will be blank. Otherwise, you'll see the output of your code.

Great job! You've connected to the serial console!


## Permissions on Linux

If you try to run `screen` and it doesn't work, then you may be running into an issue with permissions. Linux keeps track of users and groups and what they are allowed to do and not do, like access the hardware associated with the serial connection for running `screen`. So if you see something like this:

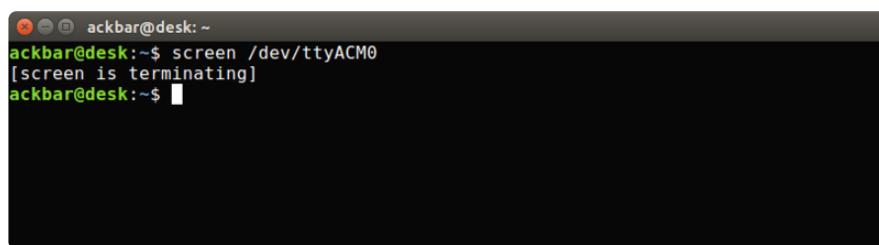


```
ackbar@desk:~$ screen /dev/ttyACM0
[screen is terminating]
ackbar@desk:~$
```

then you may need to grant yourself access. There are generally two ways you can do this. The first is to just run `screen` using the `sudo` command, which temporarily gives you elevated privileges.

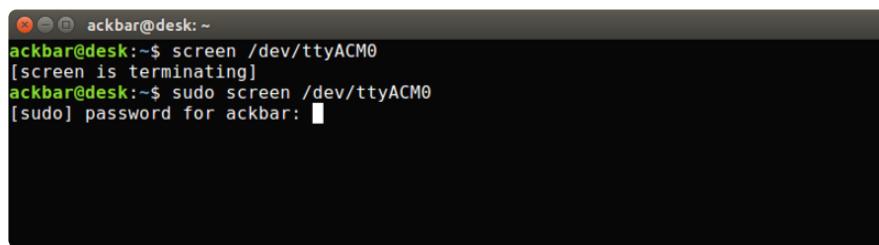

```
ackbar@desk:~$ screen /dev/ttyACM0
[screen is terminating]
ackbar@desk:~$ sudo screen /dev/ttyACM0
[sudo] password for ackbar: [REDACTED]
```

Once you enter your password, you should be in:

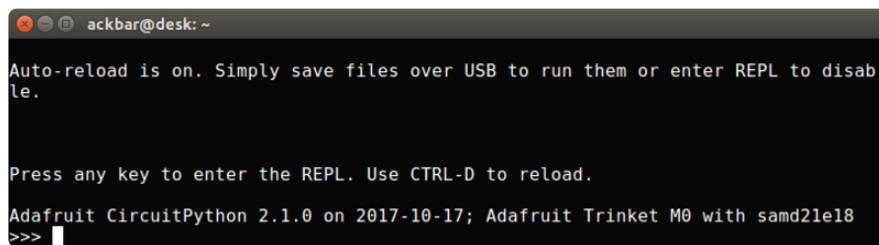


```
ackbar@desk:~$ screen /dev/ttyACM0
Auto-reload is on. Simply save files over USB to run them or enter REPL to disable.

Press any key to enter the REPL. Use CTRL-D to reload.

Adafruit CircuitPython 2.1.0 on 2017-10-17; Adafruit Trinket M0 with samd2le18
>>> [REDACTED]
```


The second way is to add yourself to the group associated with the hardware. To figure out what that group is, use the command `ls -l` as shown below. The group name is circled in red.

Then use the command `adduser` to add yourself to that group. You need elevated privileges to do this, so you'll need to use `sudo`. In the example below, the group is `adm` and the user is `ackbar`.

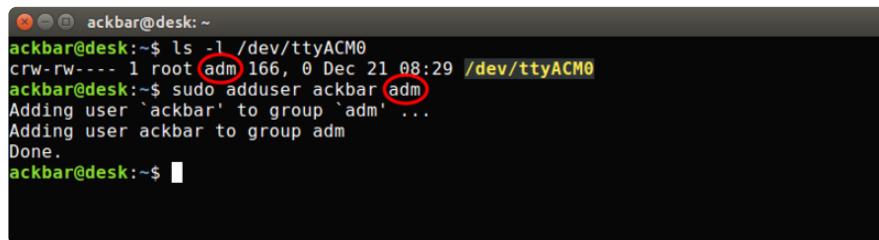


```
ackbar@desk:~$ ls -l /dev/ttyACM0
crw-rw---- 1 root adm 166, 0 Dec 21 08:29 /dev/ttyACM0
ackbar@desk:~$ sudo adduser ackbar adm
Adding user `ackbar' to group `adm' ...
Adding user ackbar to group adm
Done.
ackbar@desk:~$
```

After you add yourself to the group, you'll need to logout and log back in, or in some cases, reboot your machine. After you log in again, verify that you have been added to the group using the command `groups`. If you are still not in the group, reboot and check again.

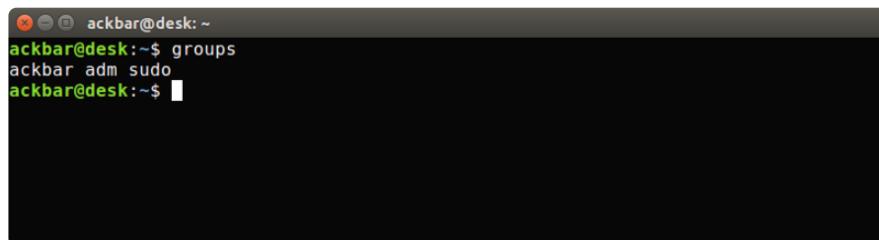


```
ackbar@desk:~$ groups
ackbar adm sudo
ackbar@desk:~$
```

And now you should be able to run `screen` without using `sudo`.

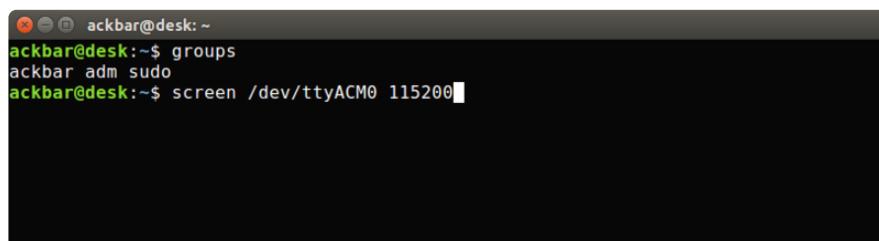

```
ackbar@desk:~$ groups
ackbar adm sudo
ackbar@desk:~$ screen /dev/ttyACM0 115200
```

And you're in:

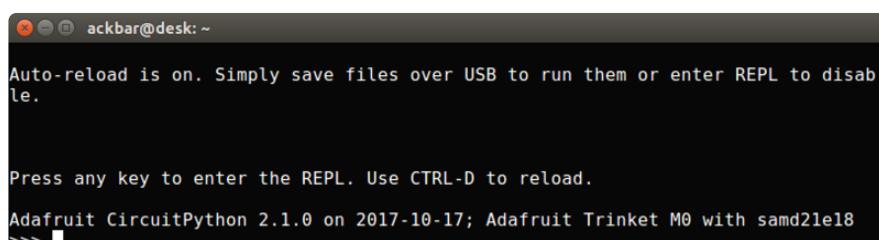

```
ackbar@desk:~$ 
Auto-reload is on. Simply save files over USB to run them or enter REPL to disable.

Press any key to enter the REPL. Use CTRL-D to reload.

Adafruit CircuitPython 2.1.0 on 2017-10-17; Adafruit Trinket M0 with samd21e18
>>>
```

The examples above use `screen`, but you can also use other programs, such as `putty` or `picocom`, if you prefer.

---

# Frequently Asked Questions

These are some of the common questions regarding CircuitPython and CircuitPython microcontrollers.

As CircuitPython development continues and there are new releases, Adafruit will stop supporting older releases. Visit <https://circuitpython.org/downloads> to download the latest version of CircuitPython for your board. You must download the CircuitPython Library Bundle that matches your version of CircuitPython. Please update CircuitPython and then visit <https://circuitpython.org/libraries> to download the latest Library Bundle.

---

## I have to continue using CircuitPython 6.x or earlier. Where can I find compatible libraries?

We are no longer building or supporting the CircuitPython 6.x or earlier library bundles. We highly encourage you to [update CircuitPython to the latest version \(https://adafru.it/Em8\)](https://adafru.it/Em8) and use [the current version of the libraries \(https://adafru.it/ENC\)](https://adafru.it/ENC). However, if for some reason you cannot update, here are the last available library bundles for older versions:

- [2.x bundle \(https://adafru.it/FJA\)](https://adafru.it/FJA)
- [3.x bundle \(https://adafru.it/FJB\)](https://adafru.it/FJB)
- [4.x bundle \(https://adafru.it/QDL\)](https://adafru.it/QDL)
- [5.x bundle \(https://adafru.it/QDJ\)](https://adafru.it/QDJ)
- [6.x bundle \(https://adafru.it/Xmf\)](https://adafru.it/Xmf)

---

## Is ESP8266 or ESP32 supported in CircuitPython? Why not?

We dropped ESP8266 support as of 4.x - For more information please read about it [here \(https://adafru.it/CiG\)](https://adafru.it/CiG)!

We do not support ESP32 because it does not have native USB.

We do support ESP32-S2, which has native USB.

---

## How do I connect to the Internet with CircuitPython?

If you'd like to include WiFi in your project, check out [this guide \(https://adafru.it/F5X\)](https://adafru.it/F5X) on using AirLift with CircuitPython. For further project examples, and guides

about using AirLift with specific hardware, check out [the Adafruit Learn System](https://adafru.it/VBr) (<https://adafru.it/VBr>).

---

## Is there asyncio support in CircuitPython?

There is preliminary support for asyncio starting with CircuitPython 7.1.0. Read about using it in the [Cooperative Multitasking in CircuitPython](https://adafru.it/XnA) (<https://adafru.it/XnA>) Guide.

---

## My RGB NeoPixel/DotStar LED is blinking funny colors - what does it mean?

The status LED can tell you what's going on with your CircuitPython board. [Read more here for what the colors mean!](https://adafru.it/Den) (<https://adafru.it/Den>)

---

## What is a MemoryError?

Memory allocation errors happen when you're trying to store too much on the board. The CircuitPython microcontroller boards have a limited amount of memory available. You can have about 250 lines of code on the M0 Express boards. If you try to `import` too many libraries, a combination of large libraries, or run a program with too many lines of code, your code will fail to run and you will receive a `MemoryError` in the serial console.

---

## What do I do when I encounter a MemoryError?

Try resetting your board. Each time you reset the board, it reallocates the memory. While this is unlikely to resolve your issue, it's a simple step and is worth trying.

Make sure you are using .mpy versions of libraries. All of the CircuitPython libraries are available in the bundle in a .mpy format which takes up less memory than .py format. Be sure that you're using [the latest library bundle](https://adafru.it/uap) (<https://adafru.it/uap>) for your version of CircuitPython.

If that does not resolve your issue, try shortening your code. Shorten comments, remove extraneous or unneeded code, or any other clean up you can do to shorten your code. If you're using a lot of functions, you could try moving those into a separate library, creating a .mpy of that library, and importing it into your code.

You can turn your entire file into a .mpy and `import` that into code.py. This means you will be unable to edit your code live on the board, but it can save you space.

---

## Can the order of my `import` statements affect memory?

It can because the memory gets fragmented differently depending on allocation order and the size of objects. Loading .mpy files uses less memory so its recommended to do that for files you aren't editing.

---

## How can I create my own .mpy files?

You can make your own .mpy versions of files with `mpy-cross`.

You can download `mpy-cross` for your operating system from [here \(https://adafruit.it/QDK\)](https://adafruit.it/QDK). Builds are available for Windows, macOS, x64 Linux, and Raspberry Pi Linux. Choose the latest `mpy-cross` whose version matches the version of CircuitPython you are using.

To make a .mpy file, run `./mpy-cross path/to/yourfile.py` to create a `yourfile.mpy` in the same directory as the original file.

---

## How do I check how much memory I have free?

Run the following to see the number of bytes available for use:

```
import gc  
gc.mem_free()
```

---

## Does CircuitPython support interrupts?

No. CircuitPython does not currently support interrupts. We do not have an estimated time for when they will be included

---

## Does Feather M0 support WINC1500?

No, WINC1500 will not fit into the M0 flash space.

---

## Can AVRs such as ATmega328 or ATmega2560 run CircuitPython?

No.

---

## Commonly Used Acronyms

CP or CPy = [CircuitPython](https://adafru.it/KJD) (<https://adafru.it/KJD>)

CPC = [Circuit Playground Classic](https://adafru.it/ncE) (<https://adafru.it/ncE>)

CPX = [Circuit Playground Express](https://adafru.it/wpF) (<https://adafru.it/wpF>)

CPB = [Circuit Playground Bluefruit](https://adafru.it/Gpe) (<https://adafru.it/Gpe>)

---

## ESP32-S2 Bugs & Limitations

Nobody likes bugs, but all nontrivial software and hardware has some. The master list of problems is the [Issues list on github](https://adafru.it/PEk) (<https://adafru.it/PEk>).

Adafruit considers CircuitPython for the ESP32-S2 to be beta quality software.

---

### I2C at 100 kHz bus frequency runs slowly

The default I2C bus clock speed is 100 kHz (100000) . At that rate, the ESP32-S2 will leave 10ms (<https://adafru.it/ZCc>) gaps between I2C transactions. This can slow down your I2C interactions considerably, such as when you are controlling a stepper motor with a PCA9685 controller.

Raising the I2C bus frequency to 125 kHz (125000) or higher fixes this problem. If your I2C peripheral can handle higher frequencies, you can use 400 kHz (400000) or even in some cases 1 MHz (1000000).

Note that `board.I2C()` creates an I2C bus that runs at 100 kHz. The bus frequency cannot be changed.. To create an I2C bus on the default I2C pins that runs at a different frequency, you must use `busio.I2C(board.SCL, board.SDA, frequency=)` .

---

### No DAC-based audio output

Current versions of the ESP-IDF SDK do not have the required APIs for DAC-based audio output. Once a future version of ESP-IDF that adds it, it will be possible to implement DAC-based AudioOut in CircuitPython.

Workaround: PWMOut can create tones and buzzes.

Workaround: I2SOut audio is currently being developed and will work with boards such as the [Adafruit I2S Stereo Decoder - UDA1334A Breakout](https://adafru.it/PEI) (<https://adafru.it/PEI>).

---

## Deep Sleep & Wake-up sources

ESP32-S2 has hardware limitations on what kind of "pin alarms" can wake it. The following combinations are possible:

- EITHER one or two pins that wake from deep sleep when they are pulled LOW
- OR an arbitrary number of pins that wake from deep sleep when they are pulled HIGH, and optionally one pin that wakes from deep sleep when pulled LOW

This means that "wake" buttons should be wired so that pressing them pulls HIGH and a pull DOWN resistor is used with the pin. However, in some hardware designs including the original MagTag, the integrated buttons are pulled LOW when pressed and so only 1 or 2 buttons can be selected to wake the MagTag.

---

## Troubleshooting

From time to time, you will run into issues when working with CircuitPython. Here are a few things you may encounter and how to resolve them.

As CircuitPython development continues and there are new releases, Adafruit will stop supporting older releases. Visit <https://circuitpython.org/downloads> to download the latest version of CircuitPython for your board. You must download the CircuitPython Library Bundle that matches your version of CircuitPython. Please update CircuitPython and then visit <https://circuitpython.org/libraries> to download the latest Library Bundle.

## Always Run the Latest Version of CircuitPython and Libraries

As CircuitPython development continues and there are new releases, Adafruit will stop supporting older releases. You need to [update to the latest CircuitPython. \(https://adafru.it/Em8\)](https://adafru.it/Em8).

You need to download the CircuitPython Library Bundle that matches your version of CircuitPython. Please update CircuitPython and then [download the latest bundle \(https://adafru.it/ENC\)](https://adafru.it/ENC).

As new versions of CircuitPython are released, Adafruit will stop providing the previous bundles as automatically created downloads on the Adafruit CircuitPython Library Bundle repo. If you must continue to use an earlier version, you can still download the appropriate version of `mpy-cross` from the particular release of CircuitPython on the CircuitPython repo and create your own compatible .mpy library files. However, it is best to update to the latest for both CircuitPython and the library bundle.

## I have to continue using CircuitPython 5.x or earlier. Where can I find compatible libraries?

Adafruit is no longer building or supporting the CircuitPython 5.x or earlier library bundles. You are highly encouraged to [update CircuitPython to the latest version](https://adafru.it/Em8) (<https://adafru.it/Em8>) and use [the current version of the libraries](https://adafru.it/ENC) (<https://adafru.it/ENC>). However, if for some reason you cannot update, links to the previous bundles are available in the [FAQ](https://adafru.it/FwY) (<https://adafru.it/FwY>).

## Bootloader (boardnameBOOT) Drive Not Present

You may have a different board.

Only Adafruit Express boards and the SAMD21 non-Express boards ship with the [UF2 bootloader](https://adafru.it/zbX) (<https://adafru.it/zbX>) installed. The Feather M0 Basic, Feather M0 Adalogger, and similar boards use a regular Arduino-compatible bootloader, which does not show a boardnameBOOT drive.

### MakeCode

If you are running a [MakeCode](https://adafru.it/zbY) (<https://adafru.it/zbY>) program on Circuit Playground Express, press the reset button just once to get the CPLAYBOOT drive to show up. Pressing it twice will not work.

### MacOS

DriveDx and its accompanying SAT SMART Driver can interfere with seeing the BOOT drive. [See this forum post](https://adafru.it/sTc) (<https://adafru.it/sTc>) for how to fix the problem.

## Windows 10

Did you install the Adafruit Windows Drivers package by mistake, or did you upgrade to Windows 10 with the driver package installed? You don't need to install this package on Windows 10 for most Adafruit boards. The old version (v1.5) can interfere with recognizing your device. Go to Settings -> Apps and uninstall all the "Adafruit" driver programs.

## Windows 7 or 8.1

To use a CircuitPython-compatible board with Windows 7 or 8.1, you must install a driver. Installation instructions are available [here](https://adafru.it/VuB) (<https://adafru.it/VuB>).

It is [recommended](https://adafru.it/Amd) (<https://adafru.it/Amd>) that you upgrade to Windows 10 if possible; an upgrade is probably still free for you. Check [here](https://adafru.it/Amd) (<https://adafru.it/Amd>).

The Windows Drivers installer was last updated in November 2020 (v2.5.0.0). Windows 7 drivers for CircuitPython boards released since then, including RP2040 boards, are not yet available. The boards work fine on Windows 10. A new release of the drivers is in process.

You should now be done! Test by unplugging and replugging the board. You should see the CIRCUITPY drive, and when you double-click the reset button (single click on Circuit Playground Express running MakeCode), you should see the appropriate boar dnameBOOT drive.

Let us know in the [Adafruit support forums](https://adafru.it/jlf) (<https://adafru.it/jlf>) or on the [Adafruit Discord](#) () if this does not work for you!

## Windows Explorer Locks Up When Accessing boardnameBOOT Drive

On Windows, several third-party programs that can cause issues. The symptom is that you try to access the boardnameBOOT drive, and Windows or Windows Explorer seems to lock up. These programs are known to cause trouble:

- AIDA64: to fix, stop the program. This problem has been reported to AIDA64. They acquired hardware to test, and released a beta version that fixes the

problem. This may have been incorporated into the latest release. Please let us know in the forums if you test this.

- Hard Disk Sentinel
- Kaspersky anti-virus: To fix, you may need to disable Kaspersky completely. Disabling some aspects of Kaspersky does not always solve the problem. This problem has been reported to Kaspersky.
- ESET NOD32 anti-virus: There have been problems with at least version 9.0.386.0, solved by uninstallation.

## Copying UF2 to boardnameBOOT Drive Hangs at 0% Copied

On Windows, a Western Digital (WD) utility that comes with their external USB drives can interfere with copying UF2 files to the boardnameBOOT drive. Uninstall that utility to fix the problem.

## CIRCUITPY Drive Does Not Appear or Disappears Quickly

Kaspersky anti-virus can block the appearance of the CIRCUITPY drive. There has not yet been settings change discovered that prevents this. Complete uninstallation of Kaspersky fixes the problem.

Norton anti-virus can interfere with CIRCUITPY. A user has reported this problem on Windows 7. The user turned off both Smart Firewall and Auto Protect, and CIRCUITPY then appeared.

Sophos Endpoint security software [can cause CIRCUITPY to disappear](https://adafru.it/ELr) (<https://adafru.it/ELr>) and the BOOT drive to reappear. It is not clear what causes this behavior.

## Device Errors or Problems on Windows

Windows can become confused about USB device installations. This is particularly true of Windows 7 and 8.1. It is [recommended](https://adafru.it/Amd) (<https://adafru.it/Amd>) that you upgrade to Windows 10 if possible; an upgrade is probably still free for you: see this [link](https://adafru.it/V2a) (<https://adafru.it/V2a>).

If not, try cleaning up your USB devices. Use [Uwe Sieber's Device Cleanup Tool](https://adafru.it/RWd) (<https://adafru.it/RWd>). Download and unzip the tool. Unplug all the boards and other USB devices you want to clean up. Run the tool as Administrator. You will see a listing like this, probably with many more devices. It is listing all the USB devices that are not currently attached.

The screenshot shows the Device Cleanup Tool V1.1.2 window. The menu bar includes File, Devices, Options, and Help. The main area is titled "Non-present devices:" and contains a table with columns: Device Name, Last used, Class, Service, Enumerator, COM Port, and Volume. The table lists various USB devices that are not currently present, such as Adafruit Rotary Trinkey M USB Device, CIRCUITPY, CircuitPython Audio, and several HID-compliant system multi-axis controller entries. The last column, "Volume", only has one entry for "Volume". At the bottom of the window, it says "Non-present Devices: 11" and "Selected Devices: 0".

Device Name	Last used	Class	Service	Enumerator	COM Port	Volume
Adafruit Rotary Trinkey M USB Device	19 Minutes	DiskDrive	disk	USBSTOR		
CIRCUITPY	19 Minutes	WPD	WUDFWpdFs	SWD		
CircuitPython Audio	19 Minutes	MEDIA	usbaudio	USB		
CircuitPython usb_midi_ports[0]	19 Minutes	SoftwareDevice		SWD		
CircuitPython usb_midi_ports[0]	19 Minutes	SoftwareDevice		SWD		
HID-compliant system multi-axis controller	19 Minutes	HIDClass		HID		
USB Composite Device	19 Minutes	USB	usbccgp	USB		
USB Input Device	19 Minutes	HIDClass	HidLab	USB		
USB Mass Storage Device	19 Minutes	USB	USBSTOR	USB		
USB Serial Device (COM3)	19 Minutes	Ports	usbser	USB	COM3	
Volume	19 Minutes	Volume	volume	STORAGE		

Select all the devices you want to remove, and then press Delete. It is usually safe just to select everything. Any device that is removed will get a fresh install when you plug it in. Using the Device Cleanup Tool also discards all the COM port assignments for the unplugged boards. If you have used many Arduino and CircuitPython boards, you have probably seen higher and higher COM port numbers used, seemingly without end. This will fix that problem.

## Serial Console in Mu Not Displaying Anything

There are times when the serial console will accurately not display anything, such as, when no code is currently running, or when code with no serial output is already running before you open the console. However, if you find yourself in a situation where you feel it should be displaying something like an error, consider the following.

Depending on the size of your screen or Mu window, when you open the serial console, the serial console panel may be very small. This can be a problem. A basic CircuitPython error takes 10 lines to display!


```
Auto-reload is on. Simply save files over USB to run them or enter REPL to disable.  
code.py output:  
Traceback (most recent call last):  
  File "code.py", line 7
```

```
SyntaxError: invalid syntax
```

Press any key to enter the REPL. Use CTRL-D to reload.

More complex errors take even more lines!

Therefore, if your serial console panel is five lines tall or less, you may only see blank lines or blank lines followed by **Press any key to enter the REPL. Use CTRL-D to reload.**. If this is the case, you need to either mouse over the top of the panel to utilise the option to resize the serial panel, or use the scrollbar on the right side to scroll up and find your message.

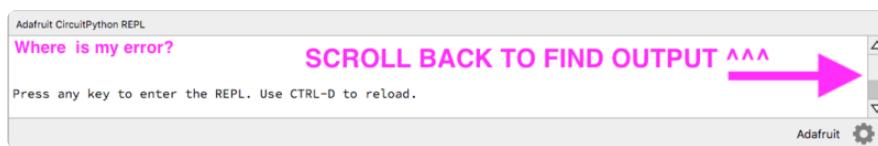

This applies to any kind of serial output whether it be error messages or print statements. So before you start trying to debug your problem on the hardware side, be sure to check that you haven't simply missed the serial messages due to serial output panel height.

## code.py Restarts Constantly

CircuitPython will restart code.py if you or your computer writes to something on the CIRCUITPY drive. This feature is called auto-reload, and lets you test a change to your program immediately.

Some utility programs, such as backup, anti-virus, or disk-checking apps, will write to the CIRCUITPY as part of their operation. Sometimes they do this very frequently, causing constant restarts.

Acronis True Image and related Acronis programs on Windows are known to cause this problem. It is possible to prevent this by [disabling the "Acronis Managed Machine Service Mini"](https://adafru.it/XDZ) (<https://adafru.it/XDZ>).

If you cannot stop whatever is causing the writes, you can disable auto-reload by putting this code in boot.py or code.py:

```
import supervisor  
supervisor.disable_autoreload()
```

# CircuitPython RGB Status Light

Nearly all CircuitPython-capable boards have a single NeoPixel or DotStar RGB LED on the board that indicates the status of CircuitPython. A few boards designed before CircuitPython existed, such as the Feather M0 Basic, do not.

Circuit Playground Express and Circuit Playground Bluefruit have multiple RGB LEDs, but do NOT have a status LED. The LEDs are all green when in the bootloader. In versions before 7.0.0, they do NOT indicate any status while running CircuitPython.

## CircuitPython 7.0.0 and Later

The status LED blinks were changed in CircuitPython 7.0.0 in order to save battery power and simplify the blinks. These blink patterns will occur on single color LEDs when the board does not have any RGB LEDs. Speed and blink count also vary for this reason.

On start up, the LED will blink YELLOW multiple times for 1 second. Pressing reset during this time will restart the board and then enter safe mode. On Bluetooth capable boards, after the yellow blinks, there will be a set of faster blue blinks. Pressing reset during the BLUE blinks will clear Bluetooth information and start the device in discoverable mode, so it can be used with a BLE code editor.


Once started, CircuitPython will blink a pattern every 5 seconds when no user code is running to indicate why the code stopped:

- 1 GREEN blink: Code finished without error.
- 2 RED blinks: Code ended due to an exception. Check the serial console for details.
- 3 YELLOW blinks: CircuitPython is in safe mode. No user code was run. Check the serial console for safe mode reason.

When in the REPL, CircuitPython will set the status LED to WHITE. You can change the LED color from the REPL. The status indicator will not persist on non-NeoPixel or DotStar LEDs.

## The CircuitPython Boot Sequence

Version 7.0 and later

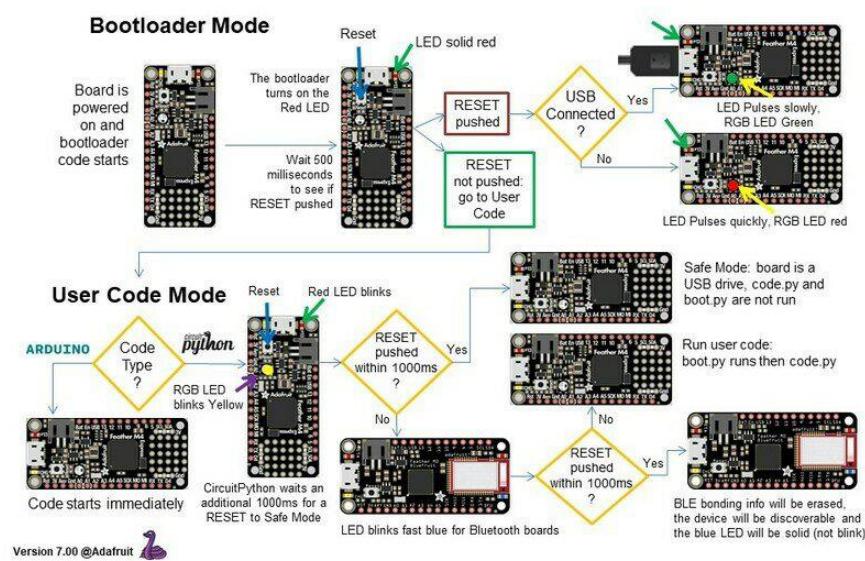

## CircuitPython 6.3.0 and earlier

Here's what the colors and blinking mean:


- steady GREEN: code.py (or code.txt, main.py, or main.txt) is running
- pulsing GREEN: code.py (etc.) has finished or does not exist
- steady YELLOW at start up: (4.0.0-alpha.5 and newer) CircuitPython is waiting for a reset to indicate that it should start in safe mode
- pulsing YELLOW: Circuit Python is in safe mode: it crashed and restarted
- steady WHITE: REPL is running
- steady BLUE: boot.py is running

Colors with multiple flashes following indicate a Python exception and then indicate the line number of the error. The color of the first flash indicates the type of error:

- GREEN: IndentationError
- CYAN: SyntaxError
- WHITE: NameError
- ORANGE: OSError
- PURPLE: ValueError
- YELLOW: other error

These are followed by flashes indicating the line number, including place value. WHITE flashes are thousands' place, BLUE are hundreds' place, YELLOW are tens' place,

and CYAN are one's place. So for example, an error on line 32 would flash YELLOW three times and then CYAN two times. Zeroes are indicated by an extra-long dark gap.

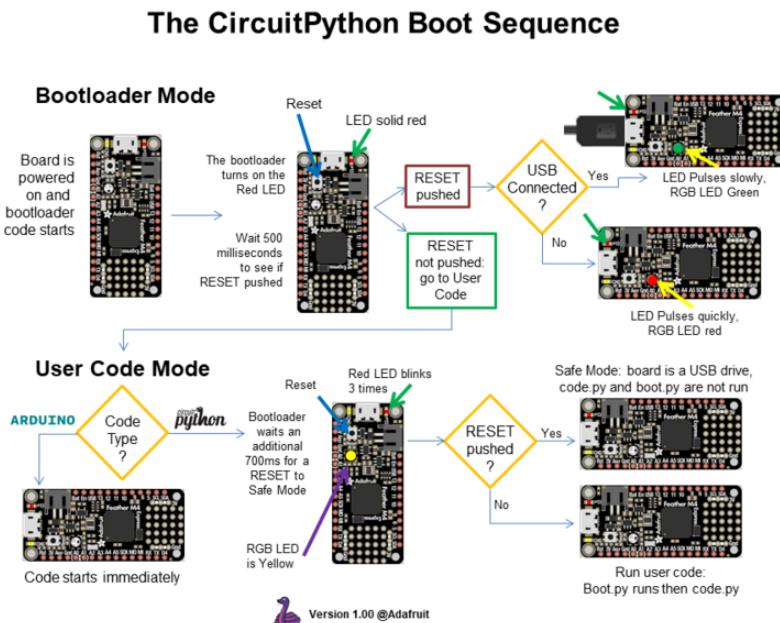

## Serial console showing **ValueError: Incompatible .mpy file**

This error occurs when importing a module that is stored as a .mpy binary file that was generated by a different version of CircuitPython than the one its being loaded into. In particular, the mpy binary format changed between CircuitPython versions 6.x and 7.x, 2.x and 3.x, and 1.x and 2.x.

So, for instance, if you upgraded to CircuitPython 7.x from 6.x you'll need to download a newer version of the library that triggered the error on `import`. All libraries are available in the [Adafruit bundle \(`https://adafru.it/yE`\)](https://adafru.it/yE).

## CIRCUITPY Drive Issues

You may find that you can no longer save files to your CIRCUITPY drive. You may find that your CIRCUITPY stops showing up in your file explorer, or shows up as NO\_NAME. These are indicators that your filesystem has issues. When the CIRCUITPY disk is not safely ejected before being reset by the button or being disconnected from USB, it may corrupt the flash drive. It can happen on Windows, Mac or Linux, though it is more common on Windows.

Be aware, if you have used Arduino to program your board, CircuitPython is no longer able to provide the USB services. You will need to reload CircuitPython to resolve this situation.

The easiest first step is to reload CircuitPython. Double-tap reset on the board so you get a `boardnameBOOT` drive rather than a `CIRCUITPY` drive, and copy the latest version of CircuitPython (`.uf2`) back to the board. This may restore `CIRCUITPY` functionality.

If reloading CircuitPython does not resolve your issue, the next step is to try putting the board into safe mode.

## Safe Mode

Whether you've run into a situation where you can no longer edit `code.py` on your `CIRCUITPY` drive, your board has gotten into a state where `CIRCUITPY` is read-only, or you have turned off the `CIRCUITPY` drive altogether, safe mode can help.

Safe mode in CircuitPython does not run any user code on startup, and disables auto-reload. This means a few things. First, safe mode bypasses any code in `boot.py` (where you can set `CIRCUITPY` read-only or turn it off completely). Second, it does not run the code in `code.py`. And finally, it does not automatically soft-reload when data is written to the `CIRCUITPY` drive.

Therefore, whatever you may have done to put your board in a non-interactive state, safe mode gives you the opportunity to correct it without losing all of the data on the `CIRCUITPY` drive.

### Entering Safe Mode in CircuitPython 7.x

To enter safe mode when using CircuitPython 7.x, plug in your board or hit reset (highlighted in red above). Immediately after the board starts up or resets, it waits 1000ms. On some boards, the onboard status LED will blink yellow during that time. If you press reset during that 1000ms, the board will start up in safe mode. It can be difficult to react to the yellow LED, so you may want to think of it simply as a "slow" double click of the reset button. (Remember, a fast double click of reset enters the bootloader.)

## Entering Safe Mode in CircuitPython 6.x

To enter safe mode when using CircuitPython 6.x, plug in your board or hit reset (highlighted in red above). Immediately after the board starts up or resets, it waits 700ms. On some boards, the onboard status LED (highlighted in green above) will turn solid yellow during this time. If you press reset during that 700ms, the board will start up in safe mode. It can be difficult to react to the yellow LED, so you may want to think of it simply as a slow double click of the reset button. (Remember, a fast double click of reset enters the bootloader.)

### In Safe Mode

Once you've entered safe mode successfully in CircuitPython 6.x, the LED will pulse yellow.

If you successfully enter safe mode on CircuitPython 7.x, the LED will intermittently blink yellow three times.

If you connect to the serial console, you'll find the following message.

```
Auto-reload is off.  
Running in safe mode! Not running saved code.  
  
CircuitPython is in safe mode because you pressed the reset button during boot.  
Press again to exit safe mode.  
  
Press any key to enter the REPL. Use CTRL-D to reload.
```

You can now edit the contents of the CIRCUITPY drive. Remember, your code will not run until you press the reset button, or unplug and plug in your board, to get out of safe mode.

At this point, you'll want to remove any user code in code.py and, if present, the boot.py file from CIRCUITPY. Once removed, tap the reset button, or unplug and plug in your board, to restart CircuitPython. This will restart the board and may resolve your drive issues. If resolved, you can begin coding again as usual.

If safe mode does not resolve your issue, the board must be completely erased and CircuitPython must be reloaded onto the board.

You **WILL** lose everything on the board when you complete the following steps. If possible, make a copy of your code before continuing.

## To erase CIRCUITPY: `storage.erase_filesystem()`

CircuitPython includes a built-in function to erase and reformat the filesystem. If you have a version of CircuitPython older than 2.3.0 on your board, you can [update to the newest version \(https://adafru.it/Amd\)](https://adafru.it/Amd) to do this.

1. [Connect to the CircuitPython REPL \(https://adafru.it/Bec\)](https://adafru.it/Bec) using Mu or a terminal program.
2. Type the following into the REPL:

```
&gt;&gt;&gt; import storage  
&gt;&gt;&gt; storage.erase_filesystem()
```

CIRCUITPY will be erased and reformatted, and your board will restart. That's it!

## Erase CIRCUITPY Without Access to the REPL

If you can't access the REPL, or you're running a version of CircuitPython previous to 2.3.0 and you don't want to upgrade, there are options available for some specific boards.

The options listed below are considered to be the "old way" of erasing your board. The method shown above using the REPL is highly recommended as the best method for erasing your board.

If at all possible, it is recommended to use the REPL to erase your CIRCUITPY drive. The REPL method is explained above.

### For the specific boards listed below:

If the board you are trying to erase is listed below, follow the steps to use the file to erase your board.

1. Download the correct erase file:

Circuit Playground Express

<https://adafru.it/Adl>

Feather M0 Express

<https://adafru.it/AdJ>

Feather M4 Express

<https://adafru.it/EVK>

Metro M0 Express

<https://adafru.it/AdK>

Metro M4 Express QSPI Eraser

<https://adafru.it/EoM>

Trellis M4 Express (QSPI)

<https://adafru.it/DjD>

Grand Central M4 Express (QSPI)

<https://adafru.it/DBA>

PyPortal M4 Express (QSPI)

<https://adafru.it/Eca>

Circuit Playground Bluefruit (QSPI)

<https://adafru.it/Gnc>

Monster M4SK (QSPI)

<https://adafru.it/GAN>

PyBadge/PyGamer QSPI Eraser.UF2

<https://adafru.it/GAO>

CLUE\_Flash\_Erase.UF2

<https://adafru.it/Jat>

Matrix\_Portal\_M4\_(QSPI).UF2

<https://adafru.it/Q5B>

2. Double-click the reset button on the board to bring up the boardnameBOOT drive.
3. Drag the erase .uf2 file to the boardnameBOOT drive.

4. The status LED will turn yellow or blue, indicating the erase has started.
5. After approximately 15 seconds, the status LED will light up green. On the NeoTrellis M4 this is the first NeoPixel on the grid
6. Double-click the reset button on the board to bring up the boardnameBOOT drive.
7. Drag the appropriate latest release of CircuitPython (<https://adafru.it/Em8>) .uf2 file to the boardnameBOOT drive.

It should reboot automatically and you should see CIRCUITPY in your file explorer again.

If the LED flashes red during step 5, it means the erase has failed. Repeat the steps starting with 2.

If you haven't already downloaded the latest release of CircuitPython for your board, check out the installation page (<https://adafru.it/Amd>). You'll also need to load your code and reinstall your libraries!

## For SAMD21 non-Express boards that have a UF2 bootloader:

Any SAMD21-based microcontroller that does not have external flash available is considered a SAMD21 non-Express board. Non-Express boards that have a UF2 bootloader include Trinket M0, GEMMA M0, QT Py M0, and the SAMD21-based Trinkey boards.

If you are trying to erase a SAMD21 non-Express board, follow these steps to erase your board.

1. Download the erase file:

SAMD21 non-Express Boards

<https://adafru.it/VB->

2. Double-click the reset button on the board to bring up the boardnameBOOT drive.
3. Drag the erase .uf2 file to the boardnameBOOT drive.
4. The boot LED will start flashing again, and the boardnameBOOT drive will reappear.
5. Drag the appropriate latest release CircuitPython (<https://adafru.it/Em8>) .uf2 file to the boardnameBOOT drive.

It should reboot automatically and you should see CIRCUITPY in your file explorer again.

If you haven't already downloaded the latest release of CircuitPython for your board, check out the installation page (<https://adafru.it/Amd>) You'll also need to load your code and reinstall your libraries!

For SAMD21 non-Express boards that do not have a UF2 bootloader:


Any SAMD21-based microcontroller that does not have external flash available is considered a SAMD21 non-Express board. Non-Express boards that do not have a UF2 bootloader include the Feather M0 Basic Proto, Feather Adalogger, or the Arduino Zero.

If you are trying to erase a non-Express board that does not have a UF2 bootloader, follow these directions to reload CircuitPython using [bossac](#) (<https://adafru.it/Bed>), which will erase and re-create CIRCUITPY.

## Running Out of File Space on SAMD21 Non-Express Boards

Any SAMD21-based microcontroller that does not have external flash available is considered a SAMD21 non-Express board. This includes boards like the Trinket M0, GEMMA M0, QT Py M0, and the SAMD21-based Trinkey boards.

The file system on the board is very tiny. (Smaller than an ancient floppy disk.) So, it's likely you'll run out of space but don't panic! There are a number of ways to free up space.

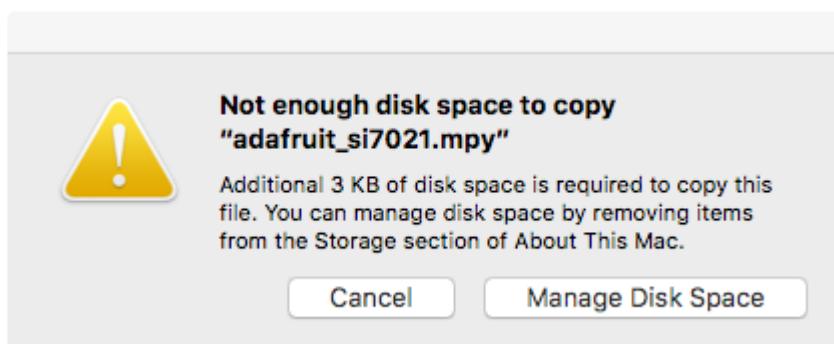

## Delete something!

The simplest way of freeing up space is to delete files from the drive. Perhaps there are libraries in the lib folder that you aren't using anymore or test code that isn't in use. Don't delete the lib folder completely, though, just remove what you don't need.

The board ships with the Windows 7 serial driver too! Feel free to delete that if you don't need it or have already installed it. It's ~12KiB or so.

## Use tabs

One unique feature of Python is that the indentation of code matters. Usually the recommendation is to indent code with four spaces for every indent. In general, that is recommended too. However, one trick to storing more human-readable code is to use a single tab character for indentation. This approach uses 1/4 of the space for indentation and can be significant when you're counting bytes.

## On MacOS?

MacOS loves to generate hidden files. Luckily you can disable some of the extra hidden files that macOS adds by running a few commands to disable search indexing and create zero byte placeholders. Follow the steps below to maximize the amount of space available on macOS.

## Prevent & Remove MacOS Hidden Files

First find the volume name for your board. With the board plugged in run this command in a terminal to list all the volumes:

```
ls -l /Volumes
```

Look for a volume with a name like CIRCUITPY (the default for CircuitPython). The full path to the volume is the /Volumes/CIRCUITPY path.

Now follow the [steps from this question](https://adafru.it/u1c) (<https://adafru.it/u1c>) to run these terminal commands that stop hidden files from being created on the board:

```
mdutil -i off /Volumes/CIRCUITPY
cd /Volumes/CIRCUITPY
rm -rf .{,_}{fsevents,Spotlight-V*,Trashes}
```

```
mkdir .fsevents.d  
touch .fsevents.d/no_log .metadata_never_index .Trashes  
cd -
```

Replace /Volumes/CIRCUITPY in the commands above with the full path to your board's volume if it's different. At this point all the hidden files should be cleared from the board and some hidden files will be prevented from being created.

Alternatively, with CircuitPython 4.x and above, the special files and folders mentioned above will be created automatically if you erase and reformat the filesystem. **WARNING:** Save your files first! Do this in the REPL:

```
>>> import storage  
>>> storage.erase_filesystem()
```

However there are still some cases where hidden files will be created by MacOS. In particular if you copy a file that was downloaded from the internet it will have special metadata that MacOS stores as a hidden file. Luckily you can run a copy command from the terminal to copy files without this hidden metadata file. See the steps below.

## Copy Files on MacOS Without Creating Hidden Files

Once you've disabled and removed hidden files with the above commands on macOS you need to be careful to copy files to the board with a special command that prevents future hidden files from being created. Unfortunately you cannot use drag and drop copy in Finder because it will still create these hidden extended attribute files in some cases (for files downloaded from the internet, like Adafruit's modules).

To copy a file or folder use the -X option for the cp command in a terminal. For example to copy a file\_name.mpy file to the board use a command like:

```
cp -X file_name.mpy /Volumes/CIRCUITPY
```

(Replace file\_name.mpy with the name of the file you want to copy.)

Or to copy a folder and all of the files and folders contained within, use a command like:


```
cp -rX folder_to_copy /Volumes/CIRCUITPY
```

If you are copying to the lib folder, or another folder, make sure it exists before copying.

```
# if lib does not exist, you'll create a file named lib !
cp -X file_name.mpy /Volumes/CIRCUITPY/lib
# This is safer, and will complain if a lib folder does not exist.
cp -X file_name.mpy /Volumes/CIRCUITPY/lib/
```


## Other MacOS Space-Saving Tips

If you'd like to see the amount of space used on the drive and manually delete hidden files here's how to do so. First, move into the Volumes/ directory with `cd /Volumes/`, and then list the amount of space used on the CIRCUITPY drive with the `df` command.

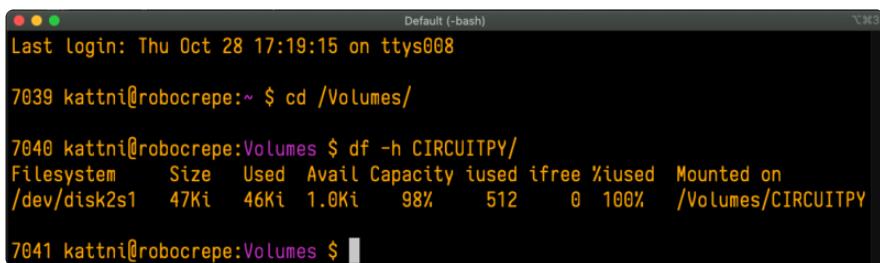

```
Last login: Thu Oct 28 17:19:15 on ttys008
7039 kattni@robocrepe:~ $ cd /Volumes/
7040 kattni@robocrepe:Volumes $ df -h CIRCUITPY/
Filesystem      Size  Used Avail Capacity iused ifree %iused Mounted on
/dev/disk2s1    47Ki  46Ki  1.0Ki   98%      512     0  100%  /Volumes/CIRCUITPY
7041 kattni@robocrepe:Volumes $
```

That's not very much space left! The next step is to show a list of the files currently on the CIRCUITPY drive, including the hidden files, using the `ls` command. You cannot use Finder to do this, you must do it via command line!

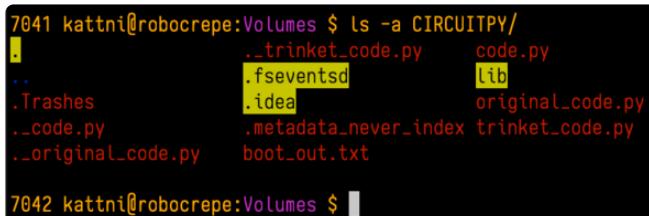

```
7041 kattni@robocrepe:Volumes $ ls -a CIRCUITPY/
.
..          ._trinket_code.py      code.py
.Trashes    .fsevents.d        lib
..code.py    .idea              original_code.py
..original_code.py  boot.out.txt
7042 kattni@robocrepe:Volumes $
```

There are a few of the hidden files that MacOS loves to generate, all of which begin with a `._` before the file name. Remove the `._` files using the `rm` command. You can remove them all once by running `rm CIRCUITPY/._*`. The `*` acts as a wildcard to apply the command to everything that begins with `._` at the same time.



```
7042 kattni@robocrepe:Volumes $ rm CIRCUITPY/._*
7043 kattni@robocrepe:Volumes $
```

Finally, you can run `df` again to see the current space used.

```
7043 kattni@robocrepe:Volumes $ df -h CIRCUITPY/
Filesystem      Size   Used  Avail Capacity iused %iused Mounted on
/dev/disk2s1    47Ki   34Ki  13Ki    73%     512     0  100%  /Volumes/CIRCUITPY

7044 kattni@robocrepe:Volumes $
```

Nice! You have 12Ki more than before! This space can now be used for libraries and code!

## Device Locked Up or Boot Looping

In rare cases, it may happen that something in your code.py or boot.py files causes the device to get locked up, or even go into a boot loop. A boot loop occurs when the board reboots repeatedly and never fully loads. These are not caused by your everyday Python exceptions, typically it's the result of a deeper problem within CircuitPython. In this situation, it can be difficult to recover your device if CIRCUITPY is not allowing you to modify the code.py or boot.py files. Safe mode is one recovery option. When the device boots up in safe mode it will not run the code.py or boot.py scripts, but will still connect the CIRCUITPY drive so that you can remove or modify those files as needed.

The method used to manually enter safe mode can be different for different devices. It is also very similar to the method used for getting into bootloader mode, which is a different thing. So it can take a few tries to get the timing right. If you end up in bootloader mode, no problem, you can try again without needing to do anything else.

For most devices:


Press the reset button, and then when the RGB status LED blinks yellow, press the reset button again. Since your reaction time may not be that fast, try a "slow" double click, to catch the yellow LED on the second click.

For ESP32-S2 based devices:

Press and release the reset button, then press and release the boot button about 3/4 of a second later.

Refer to the diagrams above for boot sequence details.


# Welcome to the Community!

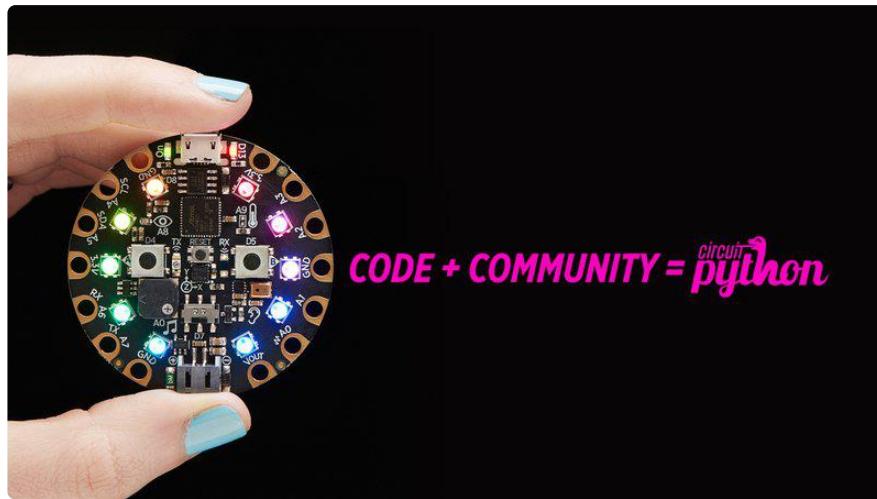

CircuitPython is a programming language that's super simple to get started with and great for learning. It runs on microcontrollers and works out of the box. You can plug it in and get started with any text editor. The best part? CircuitPython comes with an amazing, supportive community.

Everyone is welcome! CircuitPython is Open Source. This means it's available for anyone to use, edit, copy and improve upon. This also means CircuitPython becomes better because of you being a part of it. Whether this is your first microcontroller board or you're a seasoned software engineer, you have something important to offer the Adafruit CircuitPython community. This page highlights some of the many ways you can be a part of it!

## Adafruit Discord

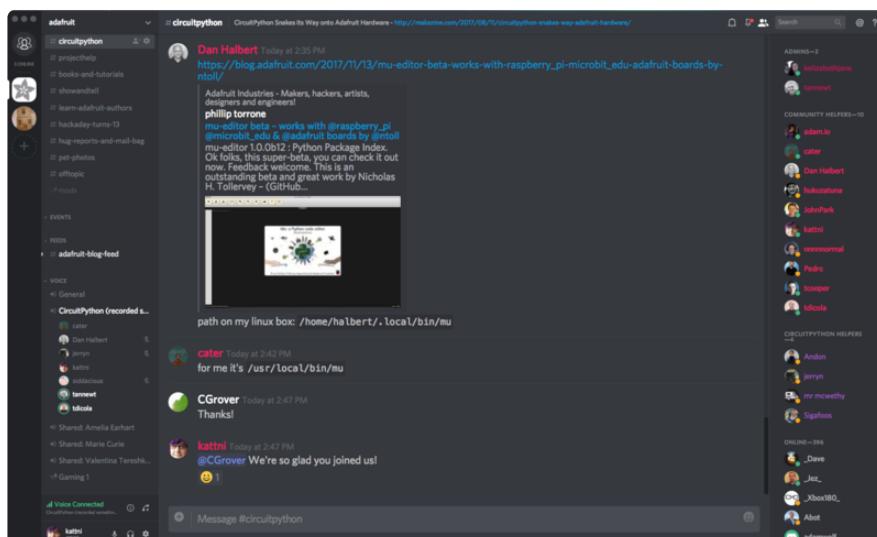

The Adafruit Discord server is the best place to start. Discord is where the community comes together to volunteer and provide live support of all kinds. From general discussion to detailed problem solving, and everything in between, Discord is a digital maker space with makers from around the world.

There are many different channels so you can choose the one best suited to your needs. Each channel is shown on Discord as "#channelname". There's the #help-with-projects channel for assistance with your current project or help coming up with ideas for your next one. There's the #show-and-tell channel for showing off your newest creation. Don't be afraid to ask a question in any channel! If you're unsure, #general is a great place to start. If another channel is more likely to provide you with a better answer, someone will guide you.


The help with CircuitPython channel is where to go with your CircuitPython questions. #help-with-circuitpython is there for new users and developers alike so feel free to ask a question or post a comment! Everyone of any experience level is welcome to join in on the conversation. Your contributions are important! The #circuitpython-dev channel is available for development discussions as well.

The easiest way to contribute to the community is to assist others on Discord. Supporting others doesn't always mean answering questions. Join in celebrating successes! Celebrate your mistakes! Sometimes just hearing that someone else has gone through a similar struggle can be enough to keep a maker moving forward.

The Adafruit Discord is the 24x7x365 hackerspace that you can bring your granddaughter to.

Visit <https://adafru.it/discord> () to sign up for Discord. Everyone is looking forward to meeting you!

# CircuitPython.org

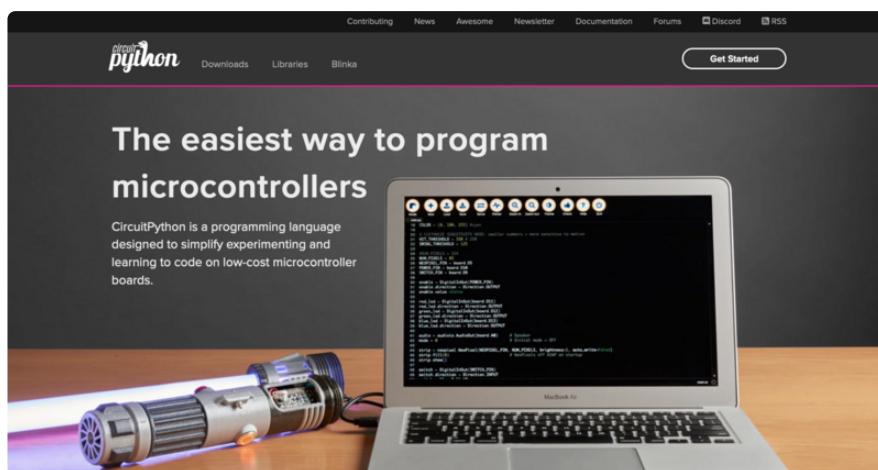

Beyond the Adafruit Learn System, which you are viewing right now, the best place to find information about CircuitPython is [circuitpython.org](https://circuitpython.org) (<https://adafru.it/KJD>). Everything you need to get started with your new microcontroller and beyond is available. You can do things like [download CircuitPython for your microcontroller](https://adafru.it/Em8) ([http://adafru.it/Em8](https://adafru.it/Em8)) or [download the latest CircuitPython Library bundle](https://adafru.it/ENC) (<https://adafru.it/ENC>), or check out [which single board computers support Blinka](https://adafru.it/EA8) (<https://adafru.it/EA8>). You can also get to various other CircuitPython related things like Awesome CircuitPython or the Python for Microcontrollers newsletter. This is all incredibly useful, but it isn't necessarily community related. So why is it included here? The [Contributing page](https://adafru.it/VD7) (<https://adafru.it/VD7>).

## Contributing

If you'd like to contribute to the CircuitPython project, the CircuitPython libraries are a great way to begin. This page is updated with daily status information from the CircuitPython libraries, including open pull requests, open issues and library infrastructure issues.

Do you write a language other than English? Another great way to contribute to the project is to contribute new localizations (translations) of CircuitPython, or update current localizations, using [Weblate](#).

If this is your first time contributing, or you'd like to see our recommended contribution workflow, we have a guide on [Contributing to CircuitPython with Git and Github](#). You can also find us in the #circuitpython channel on the [Adafruit Discord](#).

Have an idea for a new driver or library? [File an issue on the CircuitPython repo!](#)

CircuitPython itself is written in C. However, all of the Adafruit CircuitPython libraries are written in Python. If you're interested in contributing to CircuitPython on the Python side of things, check out [circuitpython.org/contributing](https://circuitpython.org/contributing) (<https://adafru.it/VD7>). You'll find information pertaining to every Adafruit CircuitPython library GitHub repository, giving you the opportunity to join the community by finding a contributing option that works for you.

Note the date on the page next to Current Status for:

# Current Status for Tue, Nov 02, 2021

---

If you submit any contributions to the libraries, and do not see them reflected on the Contributing page, it could be that the job that checks for new updates hasn't yet run for today. Simply check back tomorrow!

Now, a look at the different options.

## Pull Requests

The first tab you'll find is a list of open pull requests.

This is the current status of open pull requests and issues across all of the library repos.

**Open Pull Requests**

- Adafruit\_CircuitPython\_AdafruitIO
  - Call wifi.connect() after wifi.reset() (Open 113 days)
- Adafruit\_CircuitPython\_ADDS1x15
  - Supress f-string recommendation in .pylintrc (Open 1 days)
- Adafruit\_CircuitPython\_ADT7410
  - Adding critical temp features (Open 168 days)

GitHub pull requests, or PRs, are opened when folks have added something to an Adafruit CircuitPython library GitHub repo, and are asking for Adafruit to add, or merge, their changes into the main library code. For PRs to be merged, they must first be reviewed. Reviewing is a great way to contribute! Take a look at the list of open pull requests, and pick one that interests you. If you have the hardware, you can test code changes. If you don't, you can still check the code updates for syntax. In the case of documentation updates, you can verify the information, or check it for spelling and grammar. Once you've checked out the update, you can leave a comment letting us know that you took a look. Once you've done that for a while, and you're more comfortable with it, you can consider joining the CircuitPythonLibrarians review team. The more reviewers we have, the more authors we can support. Reviewing is a crucial part of an open source ecosystem, CircuitPython included.

## Open Issues

The second tab you'll find is a list of open issues.


Sort by issue labels [All](#)

### Open Issues

- Adafruit\_CircuitPython\_74HC595
  - Missing Type Annotations (Open 34 days)
- Adafruit\_CircuitPython\_AdafruitIO
  - Missing Type Annotations (Open 34 days)
  - use of . and dot and groups (using circuitpython) (Open 125 days)

GitHub issues are filed for a number of reasons, including when there is a bug in the library or example code, or when someone wants to make a feature request. Issues are a great way to find an opportunity to contribute directly to the libraries by updating code or documentation. If you're interested in contributing code or documentation, take a look at the open issues and find one that interests you.

If you're not sure where to start, you can search the issues by label. Labels are applied to issues to make the goal easier to identify at a first glance, or to indicate the difficulty level of the issue. Click on the dropdown next to "Sort by issue labels" to see the list of available labels, and click on one to choose it.

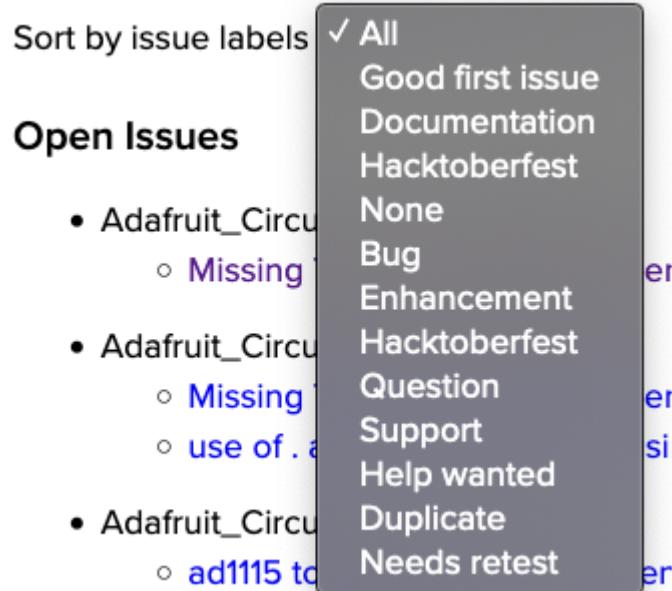

If you're new to everything, new to contributing to open source, or new to contributing to the CircuitPython project, you can choose "Good first issue". Issues with that label are well defined, with a finite scope, and are intended to be easy for someone new to figure out.

If you're looking for something a little more complicated, consider "Bug" or "Enhancement". The Bug label is applied to issues that pertain to problems or failures found in the library. The Enhancement label is applied to feature requests.

Don't let the process intimidate you. If you're new to Git and GitHub, there is [a guide](#) (<https://adafru.it/Dkh>) to walk you through the entire process. As well, there are always folks available on [Discord](#) () to answer questions.

## Library Infrastructure Issues

The third tab you'll find is a list of library infrastructure issues.

Pull Requests Open Issues **Library Infrastructure Issues** CircuitPython Localization

### Library Infrastructure Issues

The following are issues with the library infrastructure. Having a standard library structure greatly improves overall maintainability. Accordingly, we have a series of checks to ensure the standard is met. Most of these are changes that can be made via a pull request, however there are a few checks reported here that require changes to GitHub settings. If you are interested in addressing any of these issues, please feel free to contact us with any questions.

This section is generated by a script that runs checks on the libraries, and then reports back where there may be issues. It is made up of a list of subsections each containing links to the repositories that are experiencing that particular issue. This page is available mostly for internal use, but you may find some opportunities to contribute on this page. If there's an issue listed that sounds like something you could help with, mention it on Discord, or file an issue on GitHub indicating you're working to resolve that issue. Others can reply either way to let you know what the scope of it might be, and help you resolve it if necessary.

## CircuitPython Localization

The fourth tab you'll find is the CircuitPython Localization tab.

Pull Requests Open Issues **Library Infrastructure Issues** CircuitPython Localization

### CircuitPython Translation with Weblate




If you speak another language, you can help translate CircuitPython! The translations apply to informational and error messages that are within the CircuitPython core. It means that folks who do not speak English have the opportunity to have these messages shown to them in their own language when using CircuitPython. This is

incredibly important to provide the best experience possible for all users. CircuitPython uses Weblate to translate, which makes it much simpler to contribute translations. You will still need to know some CircuitPython-specific practices and a few basics about coding strings, but as with any CircuitPython contributions, folks are there to help.


Regardless of your skill level, or how you want to contribute to the CircuitPython project, there is an opportunity available. The [Contributing page](https://adafru.it/VD7) (<https://adafru.it/VD7>) is an excellent place to start!

## Adafruit GitHub

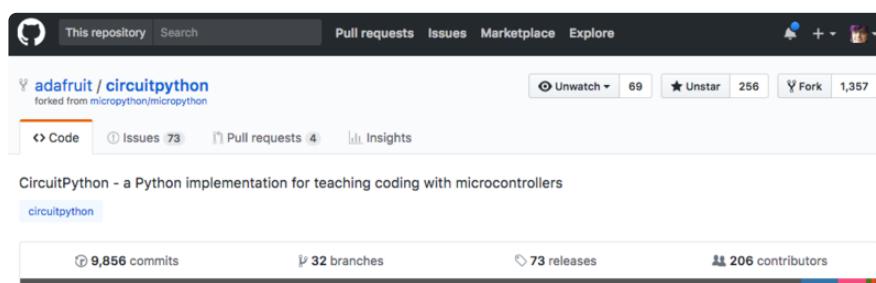

Whether you're just beginning or are life-long programmer who would like to contribute, there are ways for everyone to be a part of the CircuitPython project. The CircuitPython core is written in C. The libraries are written in Python. GitHub is the best source of ways to contribute to the [CircuitPython core](https://adafru.it/tB7) (<https://adafru.it/tB7>), and the [CircuitPython libraries](https://adafru.it/VFv) (<https://adafru.it/VFv>). If you need an account, visit <https://github.com/> (<https://adafru.it/d6C>) and sign up.

If you're new to GitHub or programming in general, there are great opportunities for you. For the CircuitPython core, head over to the CircuitPython repository on GitHub, click on "[Issues](https://adafru.it/tBb) (<https://adafru.it/tBb>)", and you'll find a list that includes issues labeled "[good first issue](https://adafru.it/Bef) (<https://adafru.it/Bef>)". For the libraries, head over to the [Contributing page Issues list](https://adafru.it/VFv) (<https://adafru.it/VFv>), and use the drop down menu to search for "[good first issue](https://adafru.it/VFw) (<https://adafru.it/VFw>)". These issues are things that have been identified as something that someone with any level of experience can help with. These issues include options like updating documentation, providing feedback, and fixing simple bugs. If you need help getting started with GitHub, there is an excellent guide on [Contributing to CircuitPython with Git and GitHub](https://adafru.it/Dkh) (<https://adafru.it/Dkh>).

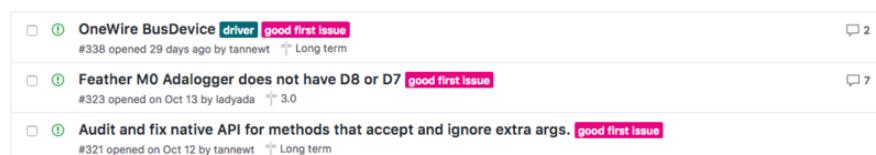


Already experienced and looking for a challenge? Checkout the rest of either issues list and you'll find plenty of ways to contribute. You'll find all sorts of things, from new driver requests, to library bugs, to core module updates. There's plenty of opportunities for everyone at any level!

When working with or using CircuitPython or the CircuitPython libraries, you may find problems. If you find a bug, that's great! The team loves bugs! Posting a detailed issue to GitHub is an invaluable way to contribute to improving CircuitPython. For CircuitPython itself, file an issue [here](https://adafru.it/tBb) (<https://adafru.it/tBb>). For the libraries, file an issue on the specific library repository on GitHub. Be sure to include the steps to replicate the issue as well as any other information you think is relevant. The more detail, the better!

Testing new software is easy and incredibly helpful. Simply load the newest version of CircuitPython or a library onto your CircuitPython hardware, and use it. Let us know about any problems you find by posting a new issue to GitHub. Software testing on both stable and unstable releases is a very important part of contributing CircuitPython. The developers can't possibly find all the problems themselves! They need your help to make CircuitPython even better.

On GitHub, you can submit feature requests, provide feedback, report problems and much more. If you have questions, remember that Discord and the Forums are both there for help!

## Adafruit Forums

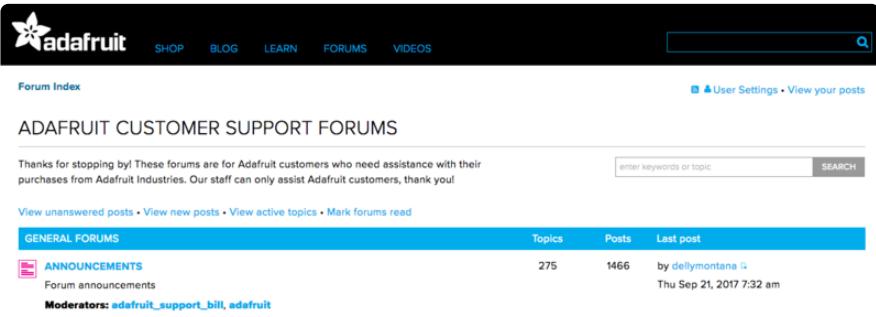A screenshot of the Adafruit Customer Support Forums homepage. At the top, there's a navigation bar with links for SHOP, BLOG, LEARN, FORUMS (which is highlighted in blue), and VIDEOS. To the right of the navigation is a search bar with a magnifying glass icon. Below the navigation, there's a link to 'Forum Index' and a user settings link 'User Settings • View your posts'. The main title 'ADAFRUIT CUSTOMER SUPPORT FORUMS' is centered above a message: 'Thanks for stopping by! These forums are for Adafruit customers who need assistance with their purchases from Adafruit Industries. Our staff can only assist Adafruit customers, thank you!'. Below this message are links for 'View unanswered posts', 'View new posts', 'View active topics', and 'Mark forums read'. A table lists forum categories: 'GENERAL FORUMS' (Topics: 275, Posts: 1466, Last post: Thu Sep 21, 2017 7:32 am), 'ANNOUNCEMENTS' (Forum announcements), and 'Moderators: adafruit\_support\_bill, adafruit'. There's also a 'SEARCH' bar at the bottom of the page.

The [Adafruit Forums](https://adafru.it/jlf) (<https://adafru.it/jlf>) are the perfect place for support. Adafruit has wonderful paid support folks to answer any questions you may have. Whether your hardware is giving you issues or your code doesn't seem to be working, the forums are always there for you to ask. You need an Adafruit account to post to the forums. You can use the same account you use to order from Adafruit.

While Discord may provide you with quicker responses than the forums, the forums are a more reliable source of information. If you want to be certain you're getting an Adafruit-supported answer, the forums are the best place to be.

There are forum categories that cover all kinds of topics, including everything Adafruit. The [Adafruit CircuitPython](https://adafru.it/xXA) (<https://adafru.it/xXA>) category under "Supported Products & Projects" is the best place to post your CircuitPython questions.

The screenshot shows the Adafruit CircuitPython forum category. At the top, there are links for 'Forum Index', 'Supported Products & Projects', and 'Adafruit CircuitPython'. On the right, there are links for 'User Settings', 'View your posts', and 'View unread replies'. Below the header, it says 'Moderators: adafruit\_support\_bill, adafruit'. There are two main sections: 'ANNOUNCEMENTS' and 'TOPICS'. The 'ANNOUNCEMENTS' section contains three posts:

Post	Replies	Views	Last post
CIRCUITYTHON 7.2.0 ALPHA 1 RELEASED!	0	20	by danhalbert · Tue Dec 28, 2021 11:55 pm
CIRCUITYTHON 7.1.0 RELEASED!	1	32	by danhalbert · Wed Dec 29, 2021 5:53 am
SAMD51 (M4) BOARD USERS: UPDATE YOUR BOOTLOADERS TO >=V3.9.0	10	2428	by Guest · Sat Aug 15, 2020 11:28 pm

The 'TOPICS' section is currently empty.

Be sure to include the steps you took to get to where you are. If it involves wiring, post a picture! If your code is giving you trouble, include your code in your post! These are great ways to make sure that there's enough information to help you with your issue.

You might think you're just getting started, but you definitely know something that someone else doesn't. The great thing about the forums is that you can help others too! Everyone is welcome and encouraged to provide constructive feedback to any of the posted questions. This is an excellent way to contribute to the community and share your knowledge!

## Read the Docs

The screenshot shows the Adafruit CircuitPython Read the Docs page for the `audioio` module. The page title is "audioio – Support for audio input and output". It includes a sidebar with "Core Modules" and "API and Usage" sections. The main content area has the following sections:

- audioio – Support for audio input and output**: Describes the `audioio` module and its classes for audio IO.
- Libraries**: Lists the `AudioOut` class.
- Notes**: A note about class lifetime and deinitialization.
- Previous** and **Next** navigation buttons.

[Read the Docs](https://adafru.it/Beg) (<https://adafru.it/Beg>) is an excellent resource for a more detailed look at the CircuitPython core and the CircuitPython libraries. This is where you'll find

things like API documentation and example code. For an in depth look at viewing and understanding Read the Docs, check out the [CircuitPython Documentation](https://adafru.it/VFx) (<https://adafru.it/VFx>) page!

Here is blinky:

```
import time
import digitalio
import board

led = digitalio.DigitalInOut(board.LED)
led.direction = digitalio.Direction.OUTPUT
while True:
    led.value = True
    time.sleep(0.1)
    led.value = False
    time.sleep(0.1)
```

---

## CircuitPython Essentials




You've been introduced to CircuitPython, and worked through getting everything set up. What's next? CircuitPython Essentials!

There are a number of core modules built into CircuitPython, which can be used along side the many CircuitPython libraries available. The following pages demonstrate some of these modules. Each page presents a different concept including a code example with an explanation. All of the examples are designed to work with your microcontroller board.

Time to get started learning the CircuitPython essentials!

Some examples require external components, such as switches or sensors. You'll find wiring diagrams where applicable to show you how to wire up the necessary components to work with each example.


The following components are needed to complete all of the examples:

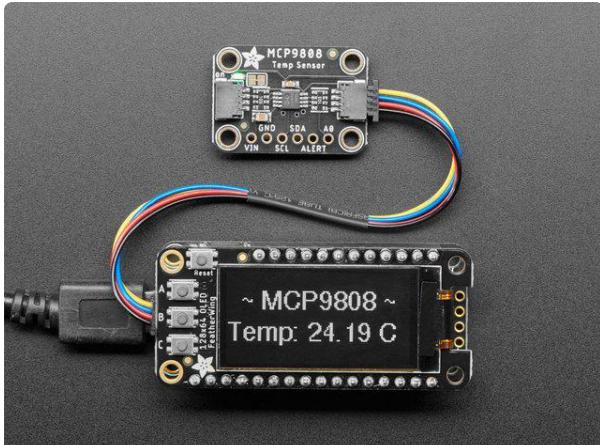

## Adafruit MCP9808 High Accuracy I2C Temperature Sensor Breakout

The MCP9808 digital temperature sensor is one of the more accurate/precise we've ever seen, with a typical accuracy of  $\pm 0.25^\circ\text{C}$  over the sensor's  $-40^\circ\text{C}$  to...

<https://www.adafruit.com/product/5027>

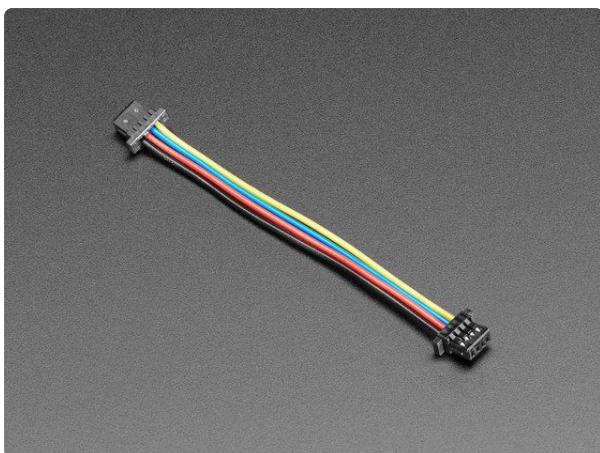

## STEMMA QT / Qwiic JST SH 4-Pin Cable - 50mm Long

This 4-wire cable is 50mm / 1.9" long and fitted with JST SH female 4-pin connectors on both ends. Compared with the chunkier JST PH these are 1mm pitch instead of 2mm, but...


<https://www.adafruit.com/product/4399>

---

## Blink

In learning any programming language, you often begin with some sort of **Hello, World!** program. In CircuitPython, Hello, World! is blinking an LED. Blink is one of the simplest programs in CircuitPython. It involves three built-in modules, two lines of set up, and a short loop. Despite its simplicity, it shows you many of the basic concepts needed for most CircuitPython programs, and provides a solid basis for more complex projects. Time to get blinky!

## LED Location

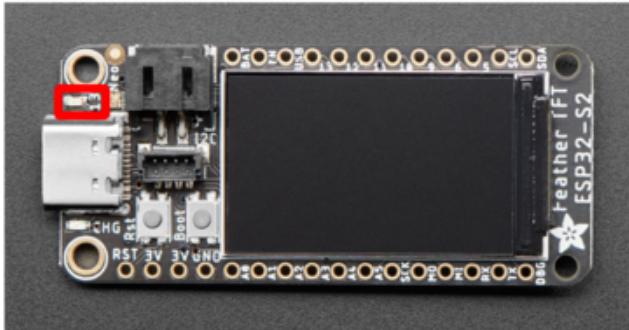

The red LED is located on the left side of the board, above the USB connector.

## Blinking an LED

Save the following as code.py on your CIRCUITPY drive.

```
# SPDX-FileCopyrightText: 2021 Kattni Rembor for Adafruit Industries
# SPDX-License-Identifier: MIT
"""CircuitPython Blink Example - the CircuitPython 'Hello, World!'"""
import time
import board
import digitalio

led = digitalio.DigitalInOut(board.LED)
led.direction = digitalio.Direction.OUTPUT

while True:
    led.value = True
    time.sleep(0.5)
    led.value = False
    time.sleep(0.5)
```

The built-in LED begins blinking!

Note that the code is a little less "Pythonic" than it could be. It could also be written as `led.value = not led.value` with a single `time.sleep(0.5)`. That way is more difficult to understand if you're new to programming, so the example is a bit longer than it needed to be to make it easier to read.

It's important to understand what is going on in this program.

First you `import` three modules: `time`, `board` and `digitalio`. This makes these modules available for use in your code. All three are built-in to CircuitPython, so you don't need to download anything to get started.

Next, you set up the LED. To interact with hardware in CircuitPython, your code must let the board know where to look for the hardware and what to do with it. So, you create a `digitalio.DigitalInOut()` object, provide it the LED pin using the `board` module, and save it to the variable `led`. Then, you tell the pin to act as an `OUTPUT`.


Finally, you create a `while True:` loop. This means all the code inside the loop will repeat indefinitely. Inside the loop, you set `led.value = True` which powers on the LED. Then, you use `time.sleep(0.5)` to tell the code to wait half a second before moving on to the next line. The next line sets `led.value = False` which turns the LED off. Then you use another `time.sleep(0.5)` to wait half a second before starting the loop over again.

With only a small update, you can control the blink speed. The blink speed is controlled by the amount of time you tell the code to wait before moving on using `time.sleep()`. The example uses `0.5`, which is one half of one second. Try increasing or decreasing these values to see how the blinking changes.

That's all there is to blinking an LED using CircuitPython!

---

## TFT Basics

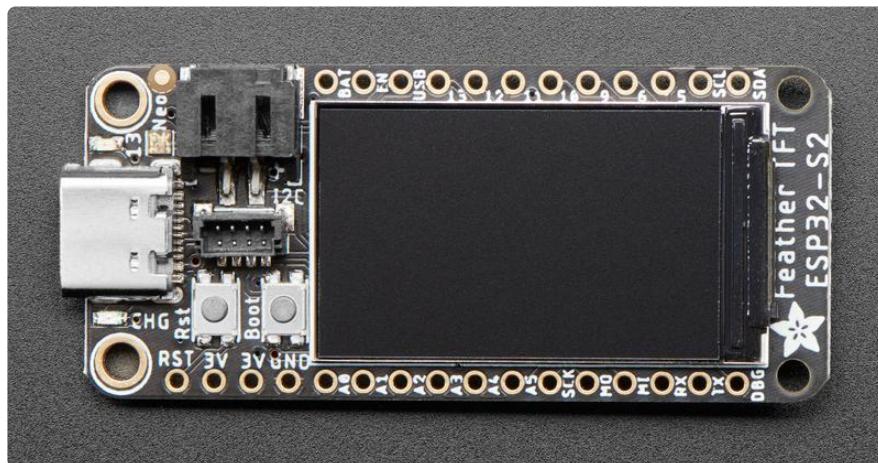

The Adafruit ESP32-S2 TFT Feather comes with a 1.14" 240x135pixel color TFT display built right in! There are a number of options for using the display. This page covers four basic ways to use the TFT display with CircuitPython: displaying the serial console/REPL, displaying simple text, displaying a bitmap, and displaying sensor data.

# CircuitPython Serial Output and REPL


The most basic way to use the display happens automatically. You can view the serial console output and, when you've entered it, the REPL.

Update your code.py file to the following.


```
import time

while True:
    print("Hello, World!")
    time.sleep(4)
```

You'll see `Hello, World!` on the display, repeated every four seconds.

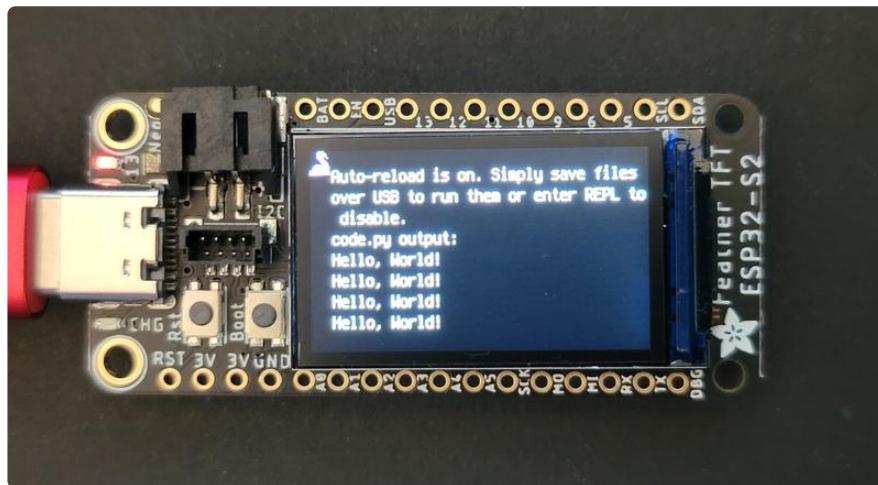

Now, if you're not already, [connect to the serial console](https://adafru.it/YCy) (<https://adafru.it/YCy>). Then, [enter the REPL](https://adafru.it/YCz) (<https://adafru.it/YCz>). You'll see the `>>>` prompt on the display (as well as on your computer). Try typing `1+2` into the REPL. `3`!

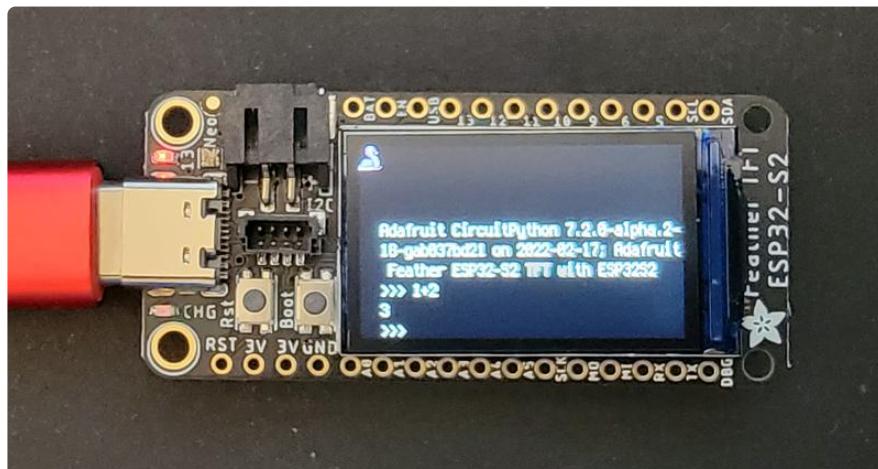

That's all there is to using the TFT display to view the CircuitPython serial console and REPL.

## Simple Text Display

The Adafruit CircuitPython Display Text library allows you to display text on the TFT display. There is a font built into CircuitPython that you can use.

Update your code.py to the following. Click the Download Project Bundle button below to download the necessary libraries and the code.py file in a zip file. Extract the contents of the zip file, and copy the entire lib folder and the code.py file to your CIRCUITPY drive.

Your CIRCUITPY drive should resemble the following.



```
# SPDX-FileCopyrightText: 2021 Tim C for Adafruit Industries
# SPDX-License-Identifier: MIT
"""
CircuitPython simple text display demo
"""
import board
import terminalio
from adafruit_display_text import bitmap_label

# Update this to change the text displayed.
text = "Hello, World!"
# Update this to change the size of the text displayed. Must be a whole number.
scale = 3

text_area = bitmap_label.Label(terminalio.FONT, text=text, scale=scale)
text_area.x = 10
text_area.y = 10
board.DISPLAY.show(text_area)

while True:
    pass
```

Hello, World! is shown across the top of the display.



To change the text displayed, update the `text = "Hello, World!"` line. For example, to show Hello, Blinka, change it to `text = "Hello, Blinka"`.

To change the size of the text displayed, update `scale = 3`. To make the text bigger, choose a large whole number. To make the text smaller, choose a smaller whole number. Minimum scale is `1`.

That's all there is to showing a line of text on the TFT display using CircuitPython!

## Simple Bitmap Display

CircuitPython has built in features, part of `displayio`, that allow you to easily display a bitmap on the TFT. This means you don't even need any external libraries!

Update your code.py to the following. Click the Download Project Bundle button below to download the necessary libraries and the code.py file in a zip file. Extract the contents of the zip file, and copy the entire lib folder, the entire images folder, and the code.py file to your CIRCUITPY drive.

Your CIRCUITPY drive should resemble the following.



```
# SPDX-FileCopyrightText: 2021 Tim C for Adafruit Industries
# SPDX-License-Identifier: MIT
```

```
"""
CircuitPython simple bitmap display demo
"""
import board
from displayio import OnDiskBitmap, TileGrid, Group

main_group = Group()
blinka_img = OnDiskBitmap("images/adafruit_blinka.bmp")


tile_grid = TileGrid(bitmap=blinka_img, pixel_shader=blinka_img.pixel_shader)
main_group.append(tile_grid)

board.DISPLAY.show(main_group)

tile_grid.x = board.DISPLAY.width // 2 - blinka_img.width // 2

while True:
    pass
```

Blinka in the center of the display!

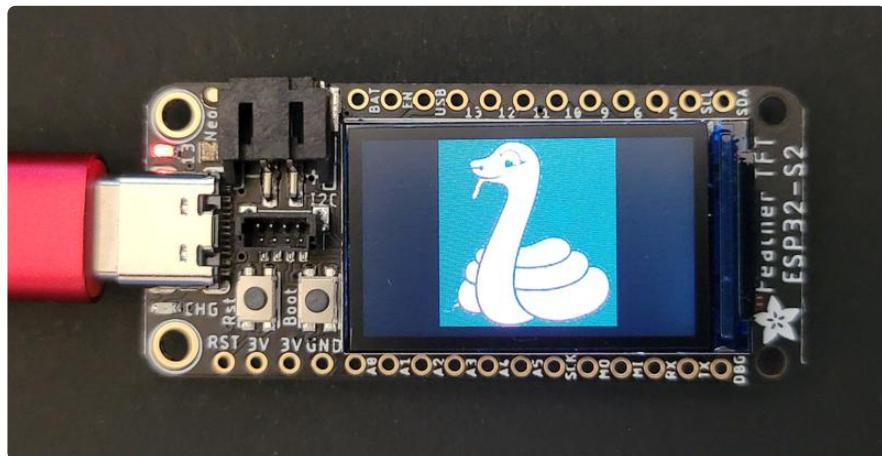

To update the bitmap file, copy your desired file to your CIRCUITPY drive. Then, change the following line to match the new filename.

```
blinka_img = OnDiskBitmap("images/adafruit_blinka.bmp")
```

For example, if you added robot.bmp to the images folder, you would change the code to read as follows.

```
blinka_img = OnDiskBitmap("images/robot.bmp")
```

That's all there is to displaying a bitmap image on the TFT display using CircuitPython!


# Simple Sensor Data Display

There is an I<sup>2</sup>C LC709203 battery monitor built into the TFT Feather along with the display. The Adafruit CircuitPython LC709203F and Display Text libraries make it easy to display the sensor data on the TFT display.

You'll want to plug in a JST lipoly battery for best results.

Update your code.py to the following. Click the Download Project Bundle button below to download the necessary libraries and the code.py file in a zip file. Extract the contents of the zip file, and copy the entire lib folder and the code.py file to your CIRCUITPY drive.

Your CIRCUITPY drive should resemble the following.

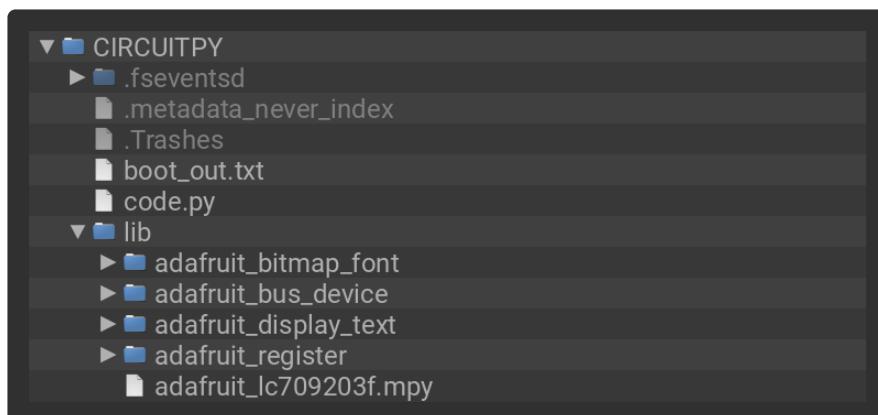

```
# SPDX-FileCopyrightText: 2021 Tim C for Adafruit Industries
# SPDX-License-Identifier: MIT
"""
CircuitPython simple sensor data display demo using LC709203 battery monitor and
TFT display
"""
import time
import board
import terminalio
from displayio import Group
from adafruit_display_text import bitmap_label
from adafruit_lc709203f import LC709203F

text_area = bitmap_label.Label(terminalio.FONT, scale=2)
text_area.anchor_point = (0.5, 0.5)
text_area.anchored_position = (board.DISPLAY.width // 2, board.DISPLAY.height // 2)

main_group = Group()

main_group.append(text_area)

print("LC709203F test")
print("Make sure LiPoly battery is plugged into the board!")


sensor = LC709203F(board.I2C())
```

```
print("IC version:", hex(sensor.ic_version))

board.DISPLAY.show(main_group)

while True:
    text_area.text = "Battery:\n{:.1f} Volts\n{}%".format(sensor.cell_voltage,
sensor.cell_percent)
    time.sleep(1)
```

The battery voltage and percent are shown on the display!

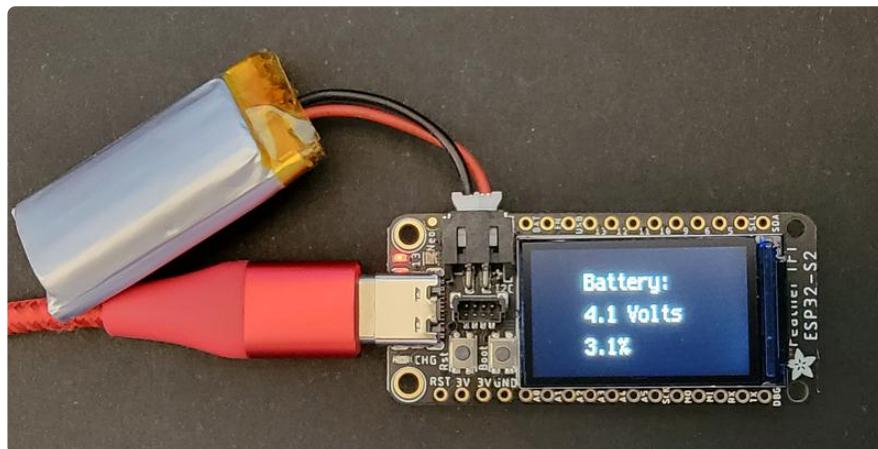

This code will run without a battery plugged in, and data will be shown on the display, but this data does not correlate to anything. Plug in a battery to get useful data!

That's all there is to displaying sensor data on the TFT using CircuitPython!

## CircuitPython Internet Test

One of the great things about the ESP32 is the built-in WiFi capabilities. This page covers the basics of getting connected using CircuitPython.

The first thing you need to do is update your code.py to the following. Click the Download Project Bundle button below to download the necessary libraries and the code.py file in a zip file. Extract the contents of the zip file, and copy the entire lib folder and the code.py file to your CIRCUITPY drive.

```
# SPDX-FileCopyrightText: 2020 Brent Rubell for Adafruit Industries
#
# SPDX-License-Identifier: MIT

import ipaddress
import ssl
import wifi
import socketpool
import adafruit_requests
```

```

# URLs to fetch from
TEXT_URL = "http://wifitest.adafruit.com/testwifi/index.html"
JSON_QUOTES_URL = "https://www.adafruit.com/api/quotes.php"
JSON_STARS_URL = "https://api.github.com/repos/adafruit/circuitpython"

# Get wifi details and more from a secrets.py file
try:
    from secrets import secrets
except ImportError:
    print("WiFi secrets are kept in secrets.py, please add them there!")
    raise

print("ESP32-S2 WebClient Test")

print("My MAC addr:", [hex(i) for i in wifi.radio.mac_address])

print("Available WiFi networks:")
for network in wifi.radio.start_scanning_networks():
    print("\t%s\tRSSI: %d\tChannel: %d" % (str(network.ssid, "utf-8"),
                                             network.rssi, network.channel))
wifi.radio.stop_scanning_networks()

print("Connecting to %s"%secrets["ssid"])
wifi.radio.connect(secrets["ssid"], secrets["password"])
print("Connected to %s!"%secrets["ssid"])
print("My IP address is", wifi.radio.ipv4_address)

ipv4 = ipaddress.ip_address("8.8.4.4")
print("Ping google.com: %f ms" % (wifi.radio.ping(ipv4)*1000))

pool = socketpool.SocketPool(wifi.radio)
requests = adafruit_requests.Session(pool, ssl.create_default_context())

print("Fetching text from", TEXT_URL)
response = requests.get(TEXT_URL)
print("-" * 40)
print(response.text)
print("-" * 40)

print("Fetching json from", JSON_QUOTES_URL)
response = requests.get(JSON_QUOTES_URL)
print("-" * 40)
print(response.json())
print("-" * 40)


print()

print("Fetching and parsing json from", JSON_STARS_URL)
response = requests.get(JSON_STARS_URL)
print("-" * 40)
print("CircuitPython GitHub Stars", response.json()["stargazers_count"])
print("-" * 40)

print("done")

```

Your CIRCUITPY drive should resemble the following.

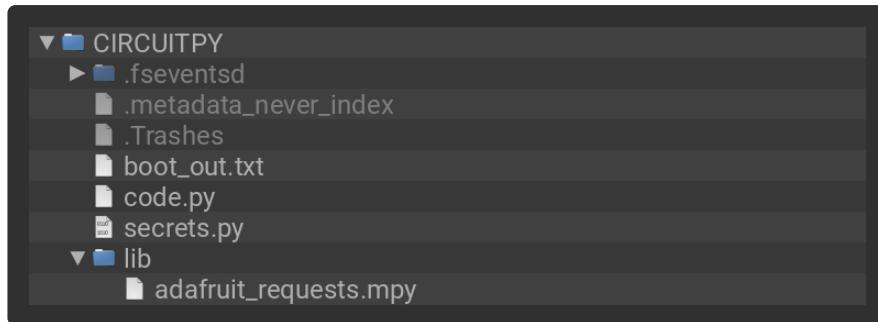

To get connected, the next thing you need to do is update the secrets.py file.

## Secrets File

We expect people to share tons of projects as they build CircuitPython WiFi widgets. What we want to avoid is people accidentally sharing their passwords or secret tokens and API keys. So, we designed all our examples to use a secrets.py file, that is on your CIRCUITPY drive, to hold secret/private/custom data. That way you can share your main project without worrying about accidentally sharing private stuff.

The initial secrets.py file on your CIRCUITPY drive should look like this:

```
# SPDX-FileCopyrightText: 2020 Adafruit Industries
#
# SPDX-License-Identifier: Unlicense

# This file is where you keep secret settings, passwords, and tokens!
# If you put them in the code you risk committing that info or sharing it

secrets = {
    'ssid' : 'home_wifi_network',
    'password' : 'wifi_password',
    'aio_username' : 'my_adafruit_io_username',
    'aio_key' : 'my_adafruit_io_key',
    'timezone' : "America/New_York", # http://worldtimeapi.org/timezones
}
```

Inside is a Python dictionary named secrets with a line for each entry. Each entry has an entry name (say `'ssid'`) and then a colon to separate it from the entry key (`'home_wifi_network'`) and finally a comma ( , ).

At a minimum you'll need to adjust the `ssid` and `password` for your local WiFi setup so do that now!


As you make projects you may need more tokens and keys, just add them one line at a time. See for example other tokens such as one for accessing GitHub or the Hackaday API. Other non-secret data like your timezone can also go here, just cause its called secrets doesn't mean you can't have general customization data in there!

For the correct time zone string, look at <http://worldtimeapi.org/timezones> (<https://adafruit.it/EcP>) and remember that if your city is not listed, look for a city in the same time zone, for example Boston, New York, Philadelphia, Washington DC, and Miami are all on the same time as New York.

Of course, don't share your secrets.py - keep that out of GitHub, Discord or other project-sharing sites.

Don't share your secrets.py file, it has your passwords and API keys in it!

If you connect to the serial console, you should see something like the following:

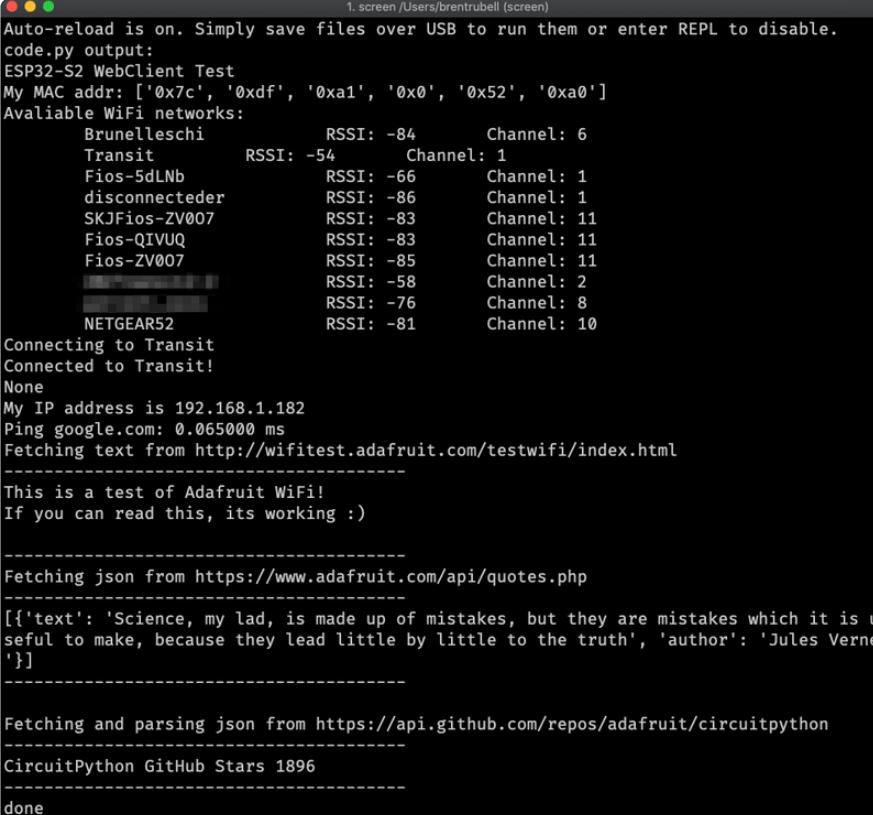

```
1. screen /Users/brentrubell (screen)
Auto-reload is on. Simply save files over USB to run them or enter REPL to disable.
code.py output:
ESP32-S2 WebClient Test
My MAC addr: ['0x7c', '0xdf', '0xa1', '0x0', '0x52', '0xa0']
Available WiFi networks:
    Brunelleschi      RSSI: -84      Channel: 6
    Transit          RSSI: -54      Channel: 1
    Fios-5dNb        RSSI: -66      Channel: 1
    disconnectederer RSSI: -86      Channel: 1
    SKJFios-ZV007    RSSI: -83      Channel: 11
    Fios-QIVUQ       RSSI: -83      Channel: 11
    Fios-ZV007       RSSI: -85      Channel: 11
    [REDACTED]         RSSI: -58      Channel: 2
    [REDACTED]         RSSI: -76      Channel: 8
    NETGEAR52        RSSI: -81      Channel: 10
Connecting to Transit
Connected to Transit!
None
My IP address is 192.168.1.182
Ping google.com: 0.065000 ms
Fetching text from http://wifitest.adafruit.com/testwifi/index.html
-----
This is a test of Adafruit WiFi!
If you can read this, its working :)

-----
Fetching json from https://www.adafruit.com/api/quotes.php
[{"text": "Science, my lad, is made up of mistakes, but they are mistakes which it is useful to make, because they lead little by little to the truth", "author": "Jules Verne"}]
-----

Fetching and parsing json from https://api.github.com/repos/adafruit/circuitpython
-----
CircuitPython GitHub Stars 1896
-----
done
```

In order, the example code...

Checks the ESP32's MAC address.

```
print("My MAC addr:", [hex(i) for i in wifi.radio.mac_address])
```

Performs a scan of all access points and prints out the access point's name (SSID), signal strength (RSSI), and channel.

```
print("Available WiFi networks:")
for network in wifi.radio.start_scanning_networks():
```

```
    print("\t%s\t\tRSSI: %d\tChannel: %d" % (str(network.ssid, "utf-8"),
                                              network.rssi, network.channel))
    wifi.radio.stop_scanning_networks()
```

Connects to the access point you defined in the secrets.py file, prints out its local IP address, and attempts to ping google.com to check its network connectivity.

```
print("Connecting to %s"%secrets["ssid"])
wifi.radio.connect(secrets["ssid"], secrets["password"])
print(print("Connected to %s!"%secrets["ssid"]))
print("My IP address is", wifi.radio.ipv4_address)

ipv4 = ipaddress.ip_address("8.8.4.4")
print("Ping google.com: %f ms" % wifi.radio.ping(ipv4))
```

The code creates a socketpool using the wifi radio's available sockets. This is performed so we don't need to re-use sockets. Then, it initializes a new instance of the [requests](https://adafru.it/E9o) (<https://adafru.it/E9o>) interface - which makes getting data from the internet really really easy.

```
pool = socketpool.SocketPool(wifi.radio)
requests = adafruit_requests.Session(pool, ssl.create_default_context())
```

To read in plain-text from a web URL, call `requests.get` - you may pass in either a http, or a https url for SSL connectivity.

```
print("Fetching text from", TEXT_URL)
response = requests.get(TEXT_URL)
print("-" * 40)
print(response.text)
print("-" * 40)
```

Requests can also display a JSON-formatted response from a web URL using a call to `requests.get`.

```
print("Fetching json from", JSON_QUOTES_URL)
response = requests.get(JSON_QUOTES_URL)
print("-" * 40)
print(response.json())
print("-" * 40)
```

Finally, you can fetch and parse a JSON URL using `requests.get`. This code snippet obtains the `stargazers_count` field from a call to the GitHub API.

```
print("Fetching and parsing json from", JSON_STARS_URL)
response = requests.get(JSON_STARS_URL)
print("-" * 40)
print("CircuitPython GitHub Stars", response.json()["stargazers_count"])
print("-" * 40)
```

OK you now have your ESP32 board set up with a proper secrets.py file and can connect over the Internet. If not, check that your secrets.py file has the right ssid and password and retrace your steps until you get the Internet connectivity working!

---

## TFT GitHub Stars WiFi Demo

The Adafruit ESP32-S2 TFT Feather comes with WiFi capabilities alongside the 1.14" 240x135pixel color TFT display. This example shows how to use the WiFi to query GitHub for the number of folks who have starred the CircuitPython project, and display the data with a lovely background on the TFT.

### GitHub Stars WiFi Demo Secrets

This example requires you to provide your Wi-Fi credentials. To do this, you'll want to create a secrets.py file on your CIRCUITPY drive, with the following structure.

Update the following with your info, keeping the `"` around them:

- Replace `"your-wifi-ssid"` with your Wi-Fi SSID
- Replace `"your-wifi-password"` with your Wi-Fi password

Your secrets.py file should look like the code below, but with the above updated info.


```
# This file is where you keep secret settings, passwords, and tokens!
# If you put them in the code you risk committing that info or sharing it

secrets = {
    "ssid": "your-wifi-ssid",
    "password": "your-wifi-password",
}
```

## Set Up CIRCUITPY

Update your code.py to the following. Click the Download Project Bundle button below to download the necessary libraries and the code.py file in a zip file. Extract the contents of the zip file, and copy the entire images folder, the entire fonts folder, the entire lib folder, and the code.py file to your CIRCUITPY drive.

Your CIRCUITPY drive should resemble the following.

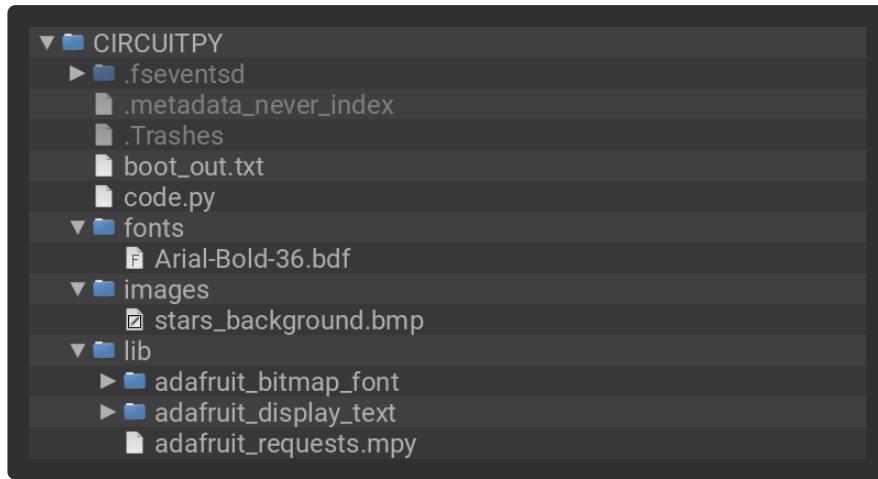

```
# SPDX-FileCopyrightText: 2021 ladyada for Adafruit Industries
# SPDX-License-Identifier: MIT
"""
CircuitPython GitHub Stars viewer
"""

import time
import ssl
import wifi
import socketpool
import displayio
import board
from adafruit_display_text import bitmap_label
from adafruit_bitmap_font import bitmap_font
import adafruit_requests

# Get WiFi details secrets.py file
try:
    from secrets import secrets
except ImportError:
    print("WiFi secrets are kept in secrets.py, please add them there!")
    raise

display = board.DISPLAY

# URL to fetch from
JSON_STARS_URL = "https://api.github.com/repos/adafruit/circuitpython"

# Set up background image and text
bitmap = displayio.OnDiskBitmap("/images/stars_background.bmp")
tile_grid = displayio.TileGrid(bitmap, pixel_shader=bitmap.pixel_shader)
group = displayio.Group()
group.append(tile_grid)
font = bitmap_font.load_font("/fonts/Arial-Bold-36.bdf")
text_area = bitmap_label.Label(font, text="----", color=0xFFFFF)
text_area.x = 135
text_area.y = 90
group.append(text_area)
display.show(group)


# Connect to WiFi
print("Connecting to %s"%secrets["ssid"])
wifi.radio.connect(secrets["ssid"], secrets["password"])
print("Connected to %s!"%secrets["ssid"])
print("My IP address is", wifi.radio.ipv4_address)

pool = socketpool.SocketPool(wifi.radio)
requests = adafruit_requests.Session(pool, ssl.create_default_context())


while True:
    print("Fetching and parsing json from", JSON_STARS_URL)
```

```
response = requests.get(JSON_STARS_URL)
stars = response.json()["stargazers_count"]
print("-" * 40)
print("CircuitPython GitHub Stars", stars)
print("-" * 40)
text_area.text = str(stars)
time.sleep(120)
```

Once everything is copied over, the background will show up on the display with ---- in the lower right.

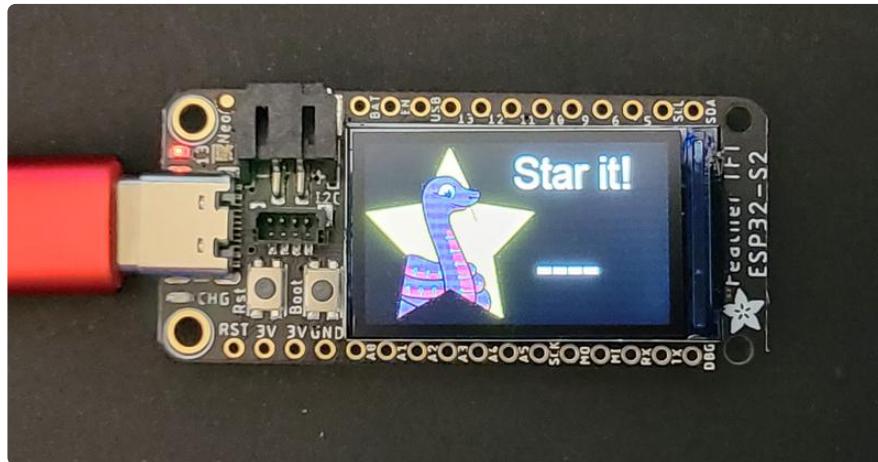

Give it a moment to connect to WiFi and query GitHub. The ---- will be replaced with the number of stars!

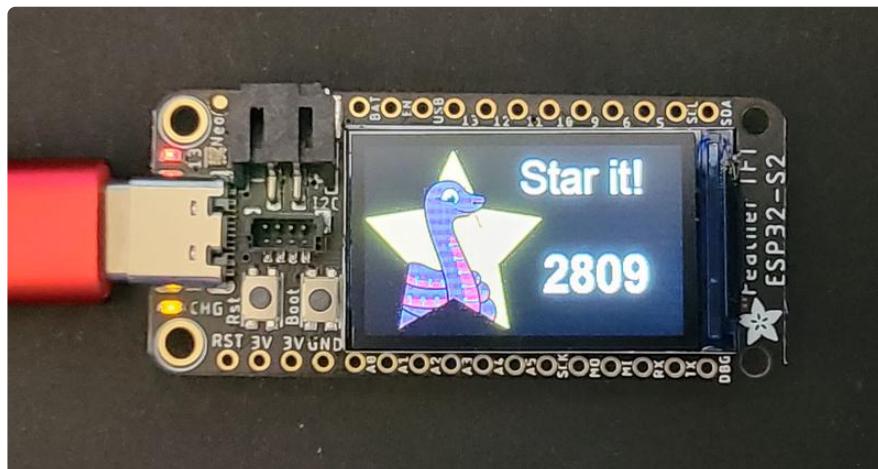

## Code Walkthrough

First you import all the necessary modules and libraries, including the secrets.py file which should have your WiFi credentials in it.

Next, you set up the display.

Then you provide the URL from which to fetch the data.

Next, you set up the background image, font, and text display.

After that, you connect to the WiFi.

Inside the loop, you fetch the data from the provided URL, specify the data you're looking for (`stargazer_count`), print the data to the serial console, and update the text on the display.

Finally, you wait 120 seconds before querying again, and updating the text with the latest information.

That's all there is to connecting to WiFi and displaying JSON data on the TFT using CircuitPython!

---


## I2C: On-Board Battery Monitor

Your microcontroller board comes with an LC709203 lithium ion polymer (lipoly) battery monitor built right onto the board. The LC709203 is available over I2C.

The LC709203 comes with its own Adafruit CircuitPython library that makes it simple to write code to read data from it. This example will be using, among other things, the [Adafruit CircuitPython LC709203F](https://adafru.it/Ne0) (<https://adafru.it/Ne0>) library.

The example simply reads data from the battery monitor and prints it to the serial console. It is designed to show you how to get data from the battery monitor.

## LC709203 Location

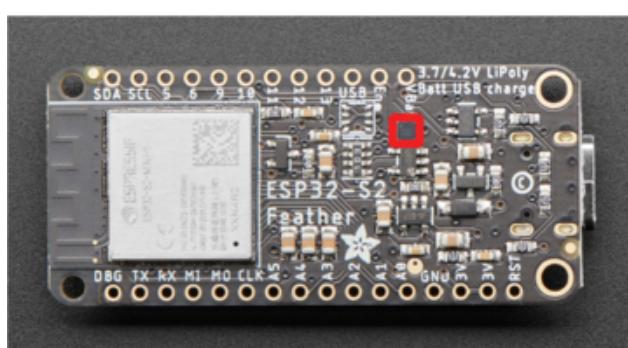

The LC709203 battery monitor (highlighted in red) is located on the bottom of the board near the VBAT pin label. Its I2C address is 0x0B. (0xb, which is returned by I2C scan, is the same as 0x0B, which simply has leading zeros.)


# LC709203 Simple Data Example

To run this example, you need to first install the LC709203F library into the lib folder on your CIRCUITPY drive. Then you need to update code.py with the example script.

Thankfully, we can do this in one go. In the example below, click the Download Project Bundle button below to download the necessary libraries and the code.py file in a zip file. Extract the contents of the zip file, and copy the entire lib folder and the code.py file to your CIRCUITPY drive.

Your CIRCUITPY/lib folder should contain at least the following folder and file:

- adafruit\_register/
- adafruit\_lc709203f.mpy

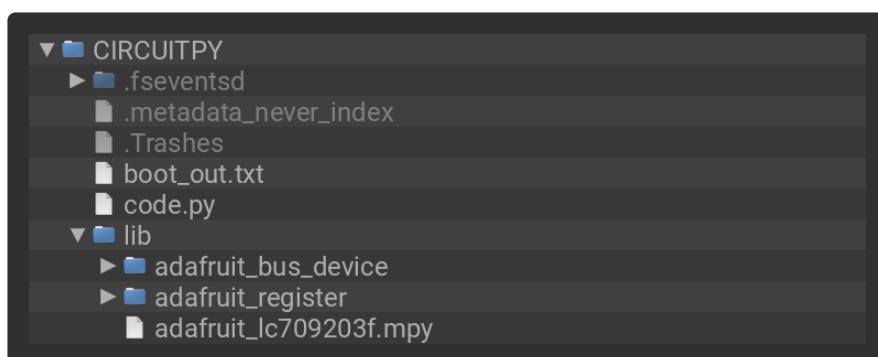

```
# SPDX-FileCopyrightText: 2022 Kattni Rembor for Adafruit Industries
# SPDX-License-Identifier: MIT
"""
CircuitPython Simple Example for LC709203 Sensor
"""

import time
import board
from adafruit_lc709203f import LC709203F, PackSize


# Create sensor object, using the board's default I2C bus.
battery_monitor = LC709203F(board.I2C())

# Update to match the mAh of your battery for more accurate readings.
# Can be MAH100, MAH200, MAH400, MAH500, MAH1000, MAH2000, MAH3000.
# Choose the closest match. Include "PackSize." before it, as shown.
battery_monitor.pack_size = PackSize.MAH400

while True:
    print("Battery Percent: {:.2f} %".format(battery_monitor.cell_percent))
    print("Battery Voltage: {:.2f} V".format(battery_monitor.cell_voltage))
    time.sleep(2)
```

This code will run without a battery plugged in, and voltage and charge level will be printed to the serial console, but this data does not correlate to anything. Plug in a battery to get useful data!

Now, [connect to the serial console](https://adafru.it/Xbl) (<https://adafru.it/Xbl>) to see the battery data printed out!

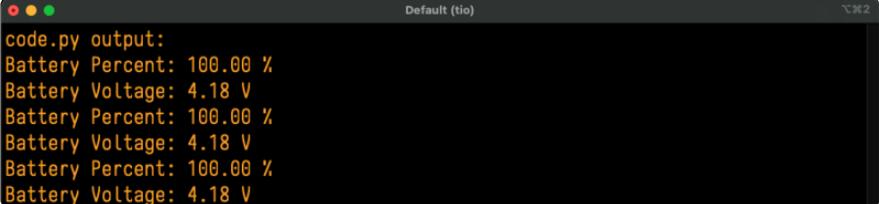

```
code.py output:  
Battery Percent: 100.00 %  
Battery Voltage: 4.18 V  
Battery Percent: 100.00 %  
Battery Voltage: 4.18 V  
Battery Percent: 100.00 %  
Battery Voltage: 4.18 V
```


That's all there is to reading the LC709203 data using CircuitPython!

For more details, check out the guide for the [LC709203](https://adafru.it/XbJ) (<https://adafru.it/XbJ>).

## Adafruit IO: Send and Receive Data

Adafruit IO gives you the option to disconnect your microcontroller from your computer and run it off of USB power or a battery, and still be able to see the data. It also allows you to send data to your microcontroller, such as NeoPixel colors. This example shows how to both send data to and receive data from Adafruit IO. It pulls from a "random" number generator and sends the "random" number to Adafruit IO, while simultaneously listening for NeoPixel color data from Adafruit IO.

## NeoPixel Location

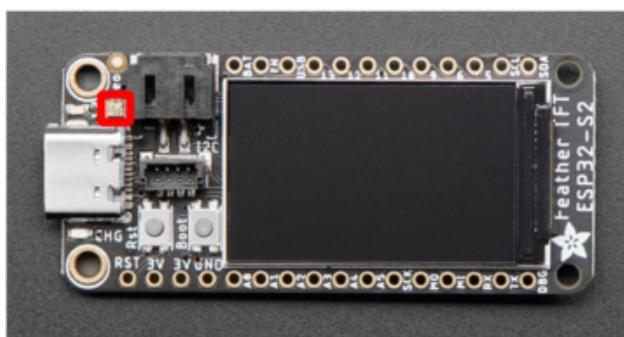

The NeoPixel (highlighted in red in the first image) is located above the USB C connector, next to the JST battery connector.


# Adafruit IO Feeds and Dashboard

The first thing you'll need to do, is head over to [Adafruit IO](https://adafru.it/fsU) (<https://adafru.it/fsU>) and make sure your account is set up.

Then, you need to [create two feeds](https://adafru.it/f5k) (<https://adafru.it/f5k>) called neopixel and random. These are case sensitive!

Next, you'll [create a dashboard](https://adafru.it/Fm7) (<https://adafru.it/Fm7>) for the NeoPixel Color Picker. You can name the dashboard whatever you like.

Once the dashboard is created, you'll want to [add a color picker block](https://adafru.it/DZe) (<https://adafru.it/DZe>). The color picker block is highlighted by a red arrow in the image below.

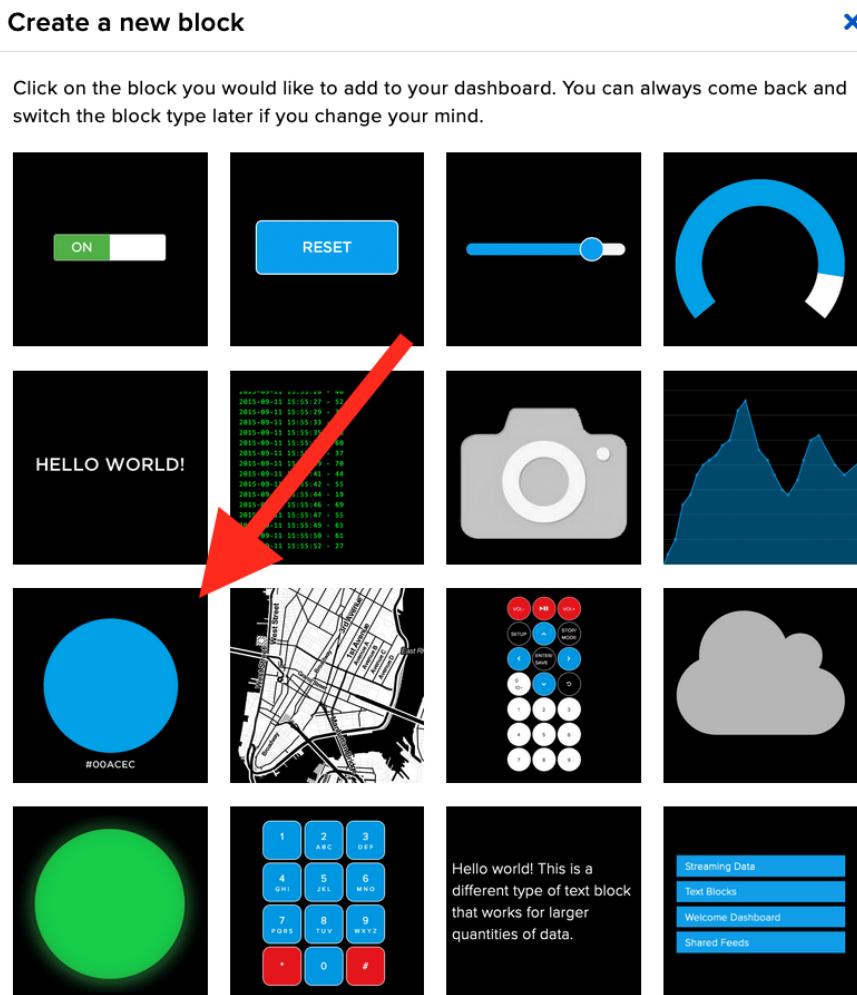

Once you choose the color picker block, you'll need to connect a feed to it. Check the box next to neopixel.

## Connect a Feed

X

The color picker is used to send or view color values in hex format.

Choose a single feed you would like to connect to this color picker. You can also create a new feed within a group.

X

**Default**

Feed Name	Last value	Recorded
<input type="checkbox"/> cpu-temperature	37.52	about 24 hours
<input checked="" type="checkbox"/> neopixel	#021fff	4 days

Enter new feed name

Create

1 of 1 feeds selected

< Previous step

Next step >

Finally, a Block Settings page will come up. You can add an optional block title here. Then you press Create Block.


## Block settings

X

In this final step, you can give your block a title and see a preview of how it will look. Customize the look and feel of your block with the remaining settings. When you are ready, click the "Create Block" button to send it to your dashboard.

Block Title (optional)

Block Preview

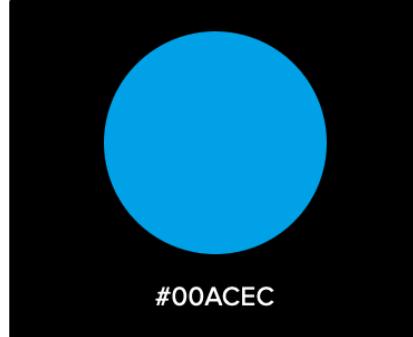

**Color Picker** The color picker is used to send or view color values in hex format.

Test Value

Published Value

0 bytes

< Previous step

Create block

The dashboard should look something like the following.



Now that things are set up on the Adafruit IO end, you can continue on to the code on your microcontroller!

## Adafruit IO Example Secrets

This example requires you to provide your Wi-Fi credentials, and your Adafruit IO username and key. To do this, you'll want to create a secrets.py file on your CIRCUITPY drive.

To obtain your Adafruit IO key, follow [the initial steps on this page \(https://adafru.it/XbK\)](https://adafru.it/XbK).

For information on how to structure your secrets.py file, and what information to add to it, check out [the Secrets File section on the CircuitPython Internet Test page \(https://adafru.it/Qgb\)](https://adafru.it/Qgb).

## Adafruit IO Example Code

To run this example, you need to first install the NeoPixel, Adafruit IO, and Adafruit MiniMQTT libraries into the lib folder on your CIRCUITPY drive. Then you need to update code.py with the example script.

Thankfully, we can do this in one go. In the example below, click the Download Project Bundle button below to download the necessary libraries and the code.py file in a zip file. Extract the contents of the zip file, and copy the entire lib folder and the code.py file to your CIRCUITPY drive.

```
# SPDX-FileCopyrightText: 2021 Ladyada for Adafruit Industries
# SPDX-FileCopyrightText: 2022 Kattni Rembor for Adafruit Industries
# SPDX-License-Identifier: MIT
import time
import ssl
from random import randint
import microcontroller
```

```

import socketpool
import wifi
import board
import neopixel
import adafruit_minimqtt.adafruit_minimqtt as MQTT
from adafruit_io.adafruit_io import IO_MQTT

try:
    from secrets import secrets
except ImportError:
    print("WiFi and Adafruit IO credentials are kept in secrets.py - please add them there!")
    raise

# Add your Adafruit IO Username and Key to secrets.py
# (visit io.adafruit.com if you need to create an account,
# or if you need to obtain your Adafruit IO key.)
aio_username = secrets["aio_username"]
aio_key = secrets["aio_key"]

# WiFi
try:
    print("Connecting to %s" % secrets["ssid"])
    wifi.radio.connect(secrets["ssid"], secrets["password"])
    print("Connected to %s!" % secrets["ssid"])
# Wi-Fi connectivity fails with error messages, not specific errors, so this except is broad.
except Exception as e: # pylint: disable=broad-except
    print("Failed to connect to WiFi. Error:", e, "\nBoard will hard reset in 30 seconds.")
    time.sleep(30)
    microcontroller.reset()

# Initialise NeoPixel
pixel = neopixel.NeoPixel(board.NEOPIXEL, 1, brightness=0.3)

# Define callback functions which will be called when certain events happen.
def connected(client):
    print("Connected to Adafruit IO! Listening for NeoPixel changes...")
    # Subscribe to Adafruit IO feed called "neopixel"
    client.subscribe("neopixel")

def message(client, feed_id, payload): # pylint: disable=unused-argument
    print("Feed {} received new value: {}".format(feed_id, payload))
    if feed_id == "neopixel":
        pixel.fill(int(payload[1:]), 16)

# Create a socket pool
pool = socketpool.SocketPool(wifi.radio)

# Initialize a new MQTT Client object
mqtt_client = MQTT.MQTT(
    broker="io.adafruit.com",
    username=secrets["aio_username"],
    password=secrets["aio_key"],
    socket_pool=pool,
    ssl_context=ssl.create_default_context(),
)

# Initialize Adafruit IO MQTT "helper"
io = IO_MQTT(mqtt_client)

# Set up the callback methods above
io.on_connect = connected
io.on_message = message

```

```

timestamp = 0
while True:
    try:
        # If Adafruit IO is not connected...
        if not io.is_connected():
            # Connect the client to the MQTT broker.
            print("Connecting to Adafruit IO...")
            io.connect()


        # Explicitly pump the message loop.
        io.loop()
        # Obtain the "random" value, print it and publish it to Adafruit IO every
        10 seconds.
        if (time.monotonic() - timestamp) >= 10:
            random_number = "{}".format(randint(0, 255))
            print("Current 'random' number: {}".format(random_number))
            io.publish("random", random_number)
            timestamp = time.monotonic()

        # Adafruit IO fails with internal error types and WiFi fails with specific
        messages.
        # This except is broad to handle any possible failure.
        except Exception as e: # pylint: disable=broad-except
            print("Failed to get or send data, or connect. Error:", e,
                  "\nBoard will hard reset in 30 seconds.")
            time.sleep(30)
            microcontroller.reset()

```

Your CIRCUITPY/lib folder should contain at least the following folders and files:

- adafruit\_io/
- adafruit\_minimqtt/
- neopixel.mpy

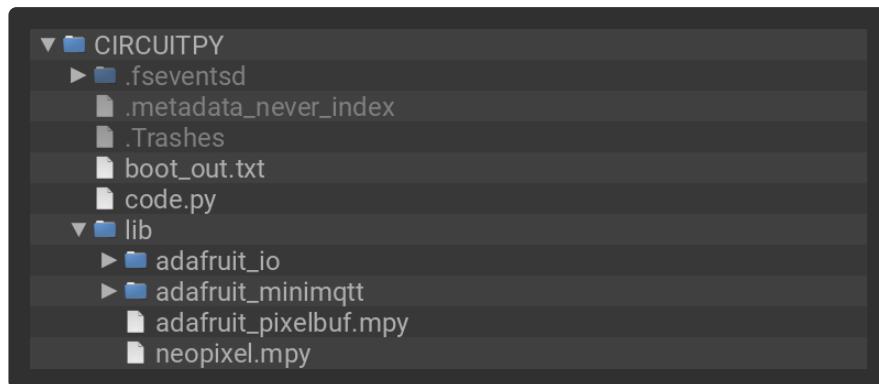


If you like, you can [connect to the serial console](https://adafru.it/Xbl) (<https://adafru.it/Xbl>) to see the connection info and current readings printed out.



## NeoPixel Color Change

To change the color of the NeoPixel, go to the NeoPixel Adafruit IO dashboard you created at the beginning, and click on the colored circle in the ColorPicker block. It will bring up the following.

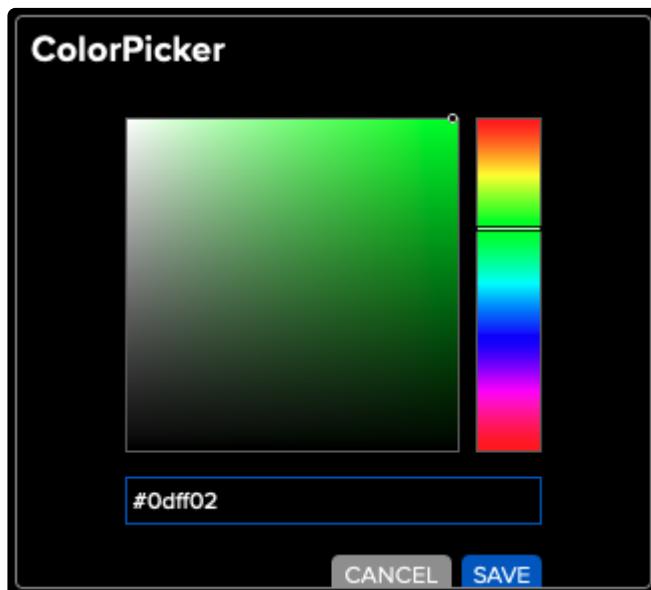

You can move the dot in the box around, and the slider line across the gradient to choose the perfect color. Choose a new color and click SAVE.

The NeoPixel color will update, and you will see the new value printed to the serial console, as shown below.

```
Current 'random' number: 4
Current 'random' number: 68
Feed neopixel received new value: #cc02ff
```

## Code Walkthrough

This example contains three `try / except` blocks. These are included where the code is likely to fail due to WiFi or Adafruit IO connection failures. WiFi can be finicky, and without these code blocks, if the connection was lost, the code would crash. Instead, it is designed to reset the board and start the code over again to reestablish the connection, regardless of the cause. This ensures your code will continue running. The details of these blocks are explained below.

First you import all of the necessary modules and libraries. This includes importing the data from your secrets.py file.

```
import time
import ssl
from random import randint
import socketpool
import wifi
import board
import neopixel
import adafruit_minimqtt.adafruit_minimqtt as MQTT
from adafruit_io.adafruit_io import IO_MQTT

try:
    from secrets import secrets
except ImportError:
    print("WiFi and Adafruit IO credentials are kept in secrets.py - please add them there!")
    raise
```

Note that if a secrets.py file is not present on your CIRCUITPY drive, the code will fail to run, and you will receive an error in the serial console. Add a secrets.py file to your CIRCUITPY drive to resolve this error.

The code pulls your Adafruit IO username and key from secrets.py.

```
aio_username = secrets["aio_username"]
aio_key = secrets["aio_key"]
```

The WiFi attempts to connect, and prints the status to the serial console. If it connects successfully, the code continues onto the NeoPixel set up.

```
try:
    print("Connecting to %s" % secrets["ssid"])
    wifi.radio.connect(secrets["ssid"], secrets["password"])
    print("Connected to %s!" % secrets["ssid"])
```

If the WiFi connection is not successful, the error will be printed to the serial console, and the board will hard reset after 30 seconds.

```
except Exception as e: # pylint: disable=broad-except
    print("Failed to connect to WiFi. Error:", e, "\nBoard will hard reset in 30 seconds.")
    time.sleep(30)
    microcontroller.reset()
```

Once the WiFi successfully connects, the NeoPixel object is initiated.

```
pixel = neopixel.NeoPixel(board.NEOPIXEL, 1, brightness=0.3)
```

Following that are two callback methods. For more details, check out [this guide \(https://adafru.it/FGB\)](https://adafru.it/FGB). The `connected` method subscribes to the neopixel feed on Adafruit

IO. The `message` callback checks for updates to the neopixel feed, and turns the pixel the color from the feed.

```
def connected(client):
    print("Connected to Adafruit IO! Listening for NeoPixel changes...")
    # Subscribe to Adafruit IO feed called "neopixel"
    client.subscribe("neopixel")

# pylint: disable=unused-argument
def message(client, feed_id, payload):
    print("Feed {} received new value: {}".format(feed_id, payload))
    if feed_id == "neopixel":
        pixel.fill(int(payload[1:]), 16)
```

You create a socket pool, use that to initialise the new MQTT Client object, and use that to initialise the Adafruit IO MQTT "helper".

```
pool = socketpool.SocketPool(wifi.radio)

mqtt_client = MQTT.MQTT(
    broker="io.adafruit.com",
    username=secrets["aio_username"],
    password=secrets["aio_key"],
    socket_pool=pool,
    ssl_context=ssl.create_default_context(),
)

io = IO_MQTT(mqtt_client)
```

You set up the callback methods mentioned above.

```
io.on_connect = connected
io.on_message = message
```

Next, you attempt to connect the client to the MQTT broker. If connection is successful, the code continues on to the `timestamp`.

```
try:
    io.connect()
```

If the MQTT broker connection is not successful, the error is printed to the serial console, and the board will hard reset after 30 seconds.

```
except Exception as e:
    print("Failed to connect to Adafruit IO. Error:", e, "\nBoard will hard reset
in 30 seconds.")
    time.sleep(30)
    microcontroller.reset()
```

Once the broker is connected, you set the `timestamp` to `0` immediately before the loop.

```
timestamp = 0
```

Inside the loop, you attempt to do two things. You first explicitly poll the message loop. Check out [this guide](https://adafru.it/YF7) (<https://adafru.it/YF7>) for more details on that.

```
while True:  
    try:  
        io.loop()
```

Second, you have a block of code that runs every 10 seconds. Inside, you obtain a "random" value between 0-255 inclusive, print it to the serial console, and publish it to an Adafruit IO feed. Finally, you reset timestamp so the block of code knows when another 10 seconds has passed, and runs again.


```
[...]  
    if (time.monotonic() - timestamp) >= 10:  
        random_number = "{}".format(randint(0, 255))  
        print("Current 'random' number: {}".format(random_number))  
        io.publish("random", random_number)  
        timestamp = time.monotonic()
```

If at any time WiFi or Adafruit IO disconnects, the code will print the error to the serial console, and the board will hard reset after 30 seconds.

```
[...]  
    except Exception as e:  
        print("Failed to get or send data, or connect. Error:", e,  
              "\nBoard will hard reset in 30 seconds.")  
        time.sleep(30)  
        microcontroller.reset()
```

That's all there is to using CircuitPython and Adafruit IO to send data to Adafruit IO, and receive data from it!

# I2C: External Sensor

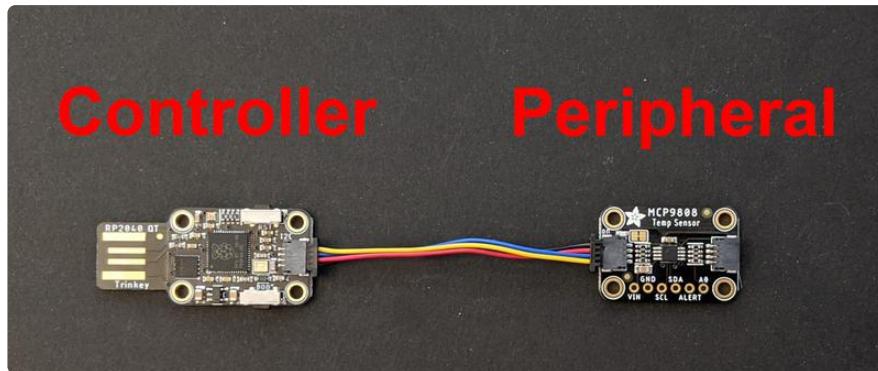

The I2C, or [inter-integrated circuit](https://adafru.it/u2a) (<https://adafru.it/u2a>), is a 2-wire protocol for communicating with simple sensors and devices, which means it uses two connections, or wires, for transmitting and receiving data. One connection is a clock, called SCL. The other is the data line, called SDA. Each pair of clock and data pins are referred to as a bus.

Typically, there is a device that acts as a controller and sends requests to the peripheral devices on each bus. In this case, your microcontroller board acts as the controller, and the sensor breakout acts as the peripheral. Historically, the controller is referred to as the master, and the peripheral is referred to as the slave, so you may run into that terminology elsewhere; at this time, Adafruit refers to them as [controller and peripheral](https://adafru.it/TtF) (<https://adafru.it/TtF>).

Multiple I2C devices can be connected to the same clock and data lines. Each I2C device has an address, and as long as the addresses are different, you can connect them at the same time. This means you can have many different sensors and devices all connected to the same two pins.

Both I2C connections require pull-up resistors, and most Adafruit I2C sensors and breakouts have pull-up resistors built in. If you're using one that does not, you'll need to add your own  $2.2\text{-}10\text{k}\Omega$  pull-up resistors from SCL and SDA to 3.3V.


## I2C and CircuitPython

CircuitPython supports many I2C devices, and makes it super simple to interact with them. There are libraries available for many I2C devices in the [CircuitPython Library Bundle](https://adafru.it/Tra) (<https://adafru.it/Tra>). (If you don't see the sensor you're looking for, keep checking back, more are being written all the time!)

In this section, you'll learn how to scan the I2C bus for all connected devices. Then you'll learn how to interact with an I2C device.

## Necessary Hardware


You'll need the following additional hardware to complete the examples on this page.

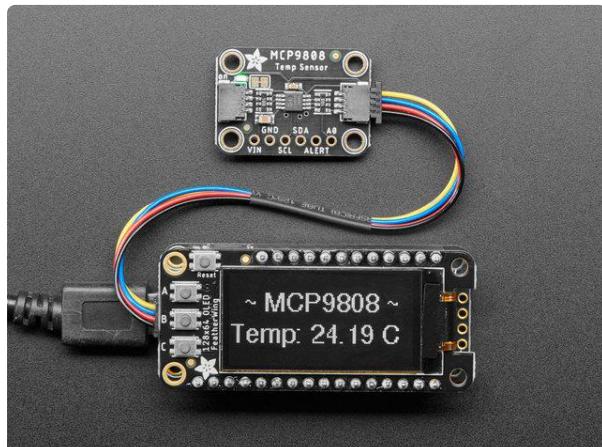

[Adafruit MCP9808 High Accuracy I2C Temperature Sensor Breakout](#)

The MCP9808 digital temperature sensor is one of the more accurate/precise we've ever seen, with a typical accuracy of  $\pm 0.25^\circ\text{C}$  over the sensor's  $-40^\circ\text{C}$  to...

<https://www.adafruit.com/product/5027>

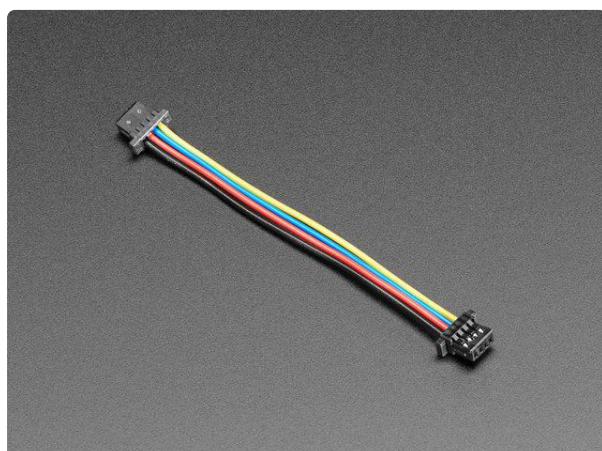

[STEMMA QT / Qwiic JST SH 4-Pin Cable - 50mm Long](#)

This 4-wire cable is 50mm / 1.9" long and fitted with JST SH female 4-pin connectors on both ends. Compared with the chunkier JST PH these are 1mm pitch instead of 2mm, but...


<https://www.adafruit.com/product/4399>

While the examples here will be using the [Adafruit MCP9808](#) (<https://adafru.it/Trb>), a high accuracy temperature sensor, the overall process is the same for just about any I2C sensor or device.

The first thing you'll want to do is get the sensor connected so your board has I2C to talk to.

## Wiring the MCP9808

The MCP9808 comes with a STEMMA QT connector, which makes wiring it up quite simple and solder-free.

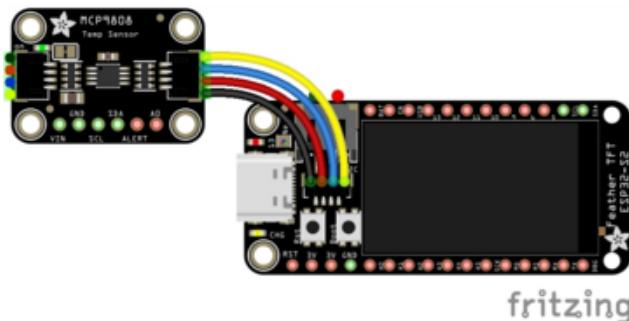

Simply connect the STEMMA QT cable from the STEMMA QT port on your board to the STEMMA QT port on the MCP9808.

## Find Your Sensor

The first thing you'll want to do after getting the sensor wired up, is make sure it's wired correctly. You're going to do an I<sub>2</sub>C scan to see if the board is detected, and if it is, print out its I<sub>2</sub>C address.

Save the following to your CIRCUITPY drive as code.py.

Click the Download Project Bundle button below to download the necessary libraries and the code.py file in a zip file. Extract the contents of the zip file, find your CircuitPython version, and copy the matching code.py file to your CIRCUITPY drive.

```
# SPDX-FileCopyrightText: 2021 Kattni Rembor for Adafruit Industries
# SPDX-License-Identifier: MIT
"""CircuitPython I2C Device Address Scan"""
import time
import board

# To use default I2C bus (most boards)
i2c = board.I2C()

# To create I2C bus on specific pins
# import busio
# i2c = busio.I2C(board.SCL1, board.SDA1) # QT Py RP2040 STEMMA connector
# i2c = busio.I2C(board.GP1, board.GP0) # Pi Pico RP2040

while not i2c.try_lock():
    pass

try:
    while True:
        print(
            "I2C addresses found:",
            [hex(device_address) for device_address in i2c.scan()],
        )
        time.sleep(2)

finally: # unlock the i2c bus when ctrl-c'ing out of the loop
    i2c.unlock()
```

The TFT Feather comes with one I2C sensor built in. The I2C scan code will show the addresses from the built in sensor and the MCP9808.

```
Auto-reload is on. Simply save files over USB to run them or enter REPL to disable.  
code.py output:  
I2C addresses found: ['0x18']
```

If you run this and it seems to hang, try manually unlocking your I2C bus by running the following two commands from the REPL.

```
import board  
board.I2C().unlock()
```

First you create the `i2c` object, using `board.I2C()`. This convenience routine creates and saves a `busio.I2C` object using the default pins `board.SCL` and `board.SDA`. If the object has already been created, then the existing object is returned. No matter how many times you call `board.I2C()`, it will return the same object. This is called a singleton.

To be able to scan it, you need to lock the I2C down so the only thing accessing it is the code. So next you include a loop that waits until I2C is locked and then continues on to the scan function.

Last, you have the loop that runs the actual scan, `i2c_scan()`. Because I2C typically refers to addresses in hex form, the example includes this bit of code that formats the results into hex format: `[hex(device_address) for device_address in i2c.scan()]`.

Open the serial console to see the results! The code prints out an array of addresses. You've connected the MCP9808 which has a 7-bit I2C address of 0x18. The result for this sensor is `I2C addresses found: ['0x18']`. If no addresses are returned, refer back to the wiring diagrams to make sure you've wired up your sensor correctly.

## I2C Sensor Data

Now you know for certain that your sensor is connected and ready to go. Time to find out how to get the data from the sensor!

Save the following to your CIRCUITPY drive as code.py.

Click the Download Project Bundle button below to download the necessary libraries and the code.py file in a zip file. Extract the contents of the zip file, find your CircuitPython version, and copy the matching entire lib folder and code.py file to your CIRCUITPY drive.

```
# SPDX-FileCopyrightText: 2021 Kattni Rembor for Adafruit Industries
# SPDX-License-Identifier: MIT
"""CircuitPython I2C MCP9808 Temperature Sensor Example"""
import time
import board
import adafruit_mcp9808

i2c = board.I2C() # uses board.SCL and board.SDA
# import busio
# i2c = busio.I2C(board.SCL1, board.SDA1) # For QT Py RP2040, QT Py ESP32-S2
mcp9808 = adafruit_mcp9808.MCP9808(i2c)

while True:
    temperature_celsius = mcp9808.temperature
    temperature_fahrenheit = temperature_celsius * 9 / 5 + 32
    print("Temperature: {:.2f} C {:.2f} F ".format(temperature_celsius,
    temperature_fahrenheit))
    time.sleep(2)
```

```
Auto-reload is on. Simply save files over USB to run them or enter REPL to disable.
code.py output:
Temperature: 23.38 C 74.07 F
```

This code begins the same way as the scan code, except this time, you create your sensor object using the sensor library. You call it `mcp9808` and provide it the `i2c` object.

Then you have a simple loop that prints out the temperature reading using the sensor object you created. Finally, there's a `time.sleep(2)`, so it only prints once every two seconds. Connect to the serial console to see the results. Try touching the MCP9808 with your finger to see the values change!

## Where's my I2C?

On many microcontrollers, you have the flexibility of using a wide range of pins for I2C. On some types of microcontrollers, any pin can be used for I2C! Other chips require using bitbangio, but can also use any pins for I2C. There are further microcontrollers that may have fixed I2C pins.

Given the many different types of microcontroller boards available, it's impossible to guarantee anything other than the labeled 'SDA' and 'SCL' pins. So, if you want some other setup, or multiple I2C interfaces, how will you find those pins? Easy! We've written a handy script.

Save the following to your CIRCUITPY drive as code.py.

Click the Download Project Bundle button below to download the necessary libraries and the code.py file in a zip file. Extract the contents of the zip file, find your CircuitPython version, and copy the matching code.py file to your CIRCUITPY drive.

```
# SPDX-FileCopyrightText: 2021 Kattni Rembor for Adafruit Industries
# SPDX-License-Identifier: MIT
"""CircuitPython I2C possible pin-pair identifying script"""
import board
import busio
from microcontroller import Pin

def is_hardware_i2c(scl, sda):
    try:
        p = busio.I2C(scl, sda)
        p.deinit()
        return True
    except ValueError:
        return False
    except RuntimeError:
        return True

def get_unique_pins():
    exclude = [
        getattr(board, p)
        for p in [
            # This is not an exhaustive list of unexposed pins. Your results
            # may include other pins that you cannot easily connect to.
            "NEOPixel",
            "DOTSTAR_CLOCK",
            "DOTSTAR_DATA",
            "APA102_SCK",
            "APA102_MOSI",
            "LED",
            "SWITCH",
            "BUTTON",
            "ACCELEROMETER_INTERRUPT",
            "VOLTAGE_MONITOR",
            "MICROPHONE_CLOCK",
            "MICROPHONE_DATA",
        ]
        if p in dir(board)
    ]
    pins = [
        pin
        for pin in [getattr(board, p) for p in dir(board)]
        if isinstance(pin, Pin) and pin not in exclude
    ]
    unique = []
    for p in pins:
        if p not in unique:
            unique.append(p)
    return unique

for scl_pin in get_unique_pins():
    for sda_pin in get_unique_pins():
        if scl_pin is sda_pin:
            continue
        if is_hardware_i2c(scl_pin, sda_pin):
            print("SCL pin:", scl_pin, "\t SDA pin:", sda_pin)
```

Now, connect to the serial console and check out the output! The results print out a nice handy list of SCL and SDA pin pairs that support I2C.



```
Auto-reload is on. Simply save files over USB to run them or enter REPL to disable.
code.py output:
SCL pin: board.D18      SDA pin: board.D17
SCL pin: board.D18      SDA pin: board.D16
SCL pin: board.D18      SDA pin: board.D15
SCL pin: board.D18      SDA pin: board.D14
SCL pin: board.D18      SDA pin: board.D8
SCL pin: board.D18      SDA pin: board.D1
SCL pin: board.D18      SDA pin: board.D10
SCL pin: board.D18      SDA pin: board.D11
```

The output for the TFT Feather is extremely long! The screenshot shows only the beginning. Run the script yourself to see the full output!

This example only runs once, so if you do not see any output when you connect to the serial console, try CTRL+D to reload.


## Analog In

Your microcontroller board has both digital and analog signal capabilities. Some pins are analog, some are digital, and some are capable of both. Check the Pinouts page in this guide for details about your board.

Analog signals are different from digital signals in that they can be any voltage and can vary continuously and smoothly between voltages. An analog signal is like a dimmer switch on a light, whereas a digital signal is like a simple on/off switch.

Digital signals only can ever have two states, they are either on (high logic level voltage like 3.3V) or off (low logic level voltage like 0V / ground).

By contrast, analog signals can be any voltage in-between on and off, such as 1.8V or 0.001V or 2.98V and so on.

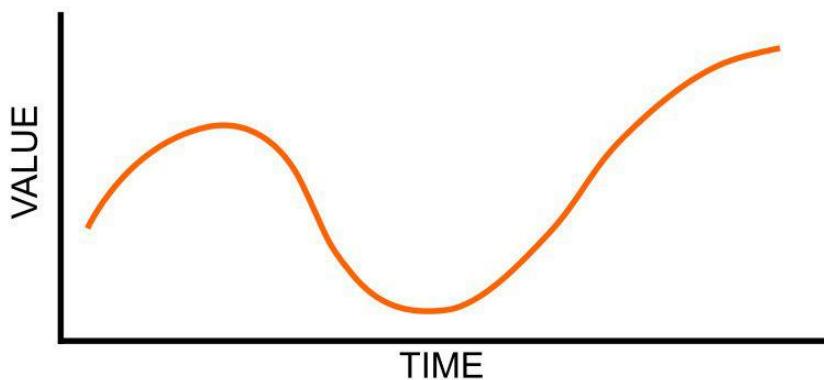


Analog signals are continuous values which means they can be an infinite number of different voltages. Think of analog signals like a floating point or fractional number, they can smoothly transition to any in-between value like 1.8V, 1.81V, 1.801V, 1.8001V, 1.80001V and so forth to infinity.

Many devices use analog signals, in particular sensors typically output an analog signal or voltage that varies based on something being sensed like light, heat, humidity, etc.

## Analog to Digital Converter (ADC)

An analog-to-digital-converter, or ADC, is the key to reading analog signals and voltages with a microcontroller. An ADC is a device that reads the voltage of an analog signal and converts it into a digital, or numeric, value. The microcontroller can't read analog signals directly, so the analog signal is first converted into a numeric value by the ADC.

The black line below shows a digital signal over time, and the red line shows the converted analog signal over the same amount of time.

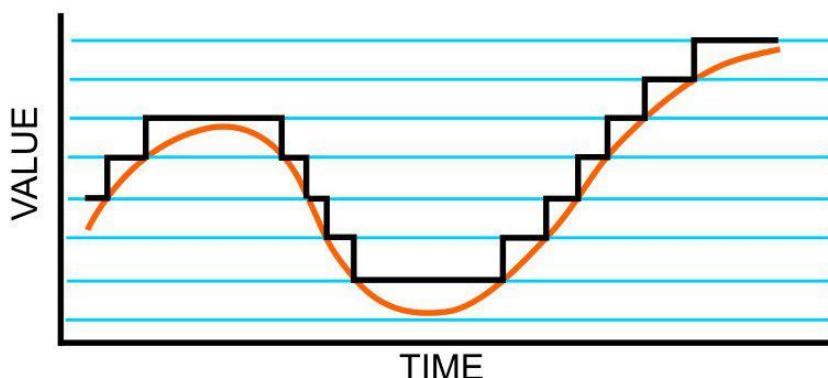


Once that analog signal has been converted by the ADC, the microcontroller can use those digital values any way you like!


## Potentiometers

A potentiometer is a small variable resistor that you can twist a knob or shaft to change its resistance. It has three pins. By twisting the knob on the potentiometer you can change the resistance of the middle pin (called the wiper) to be anywhere within the range of resistance of the potentiometer.

By wiring the potentiometer to your board in a special way (called a voltage divider) you can turn the change in resistance into a change in voltage that your board's analog to digital converter can read.

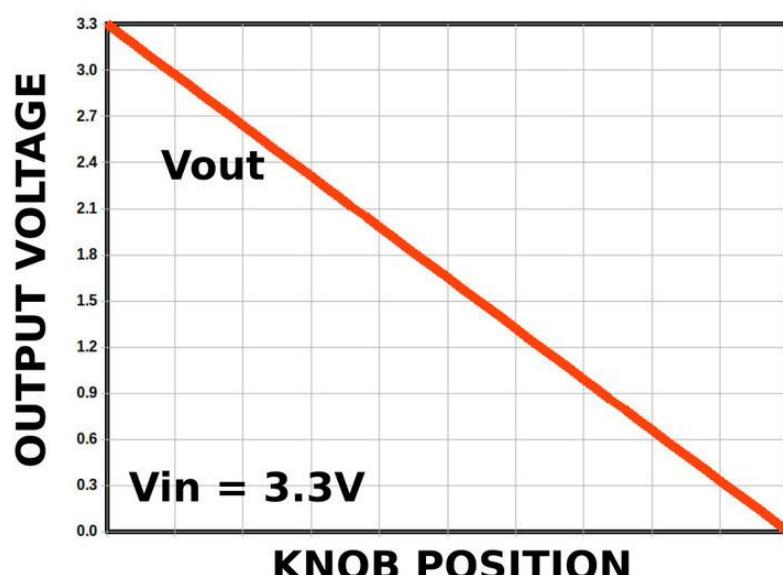

To wire up a potentiometer as a voltage divider:

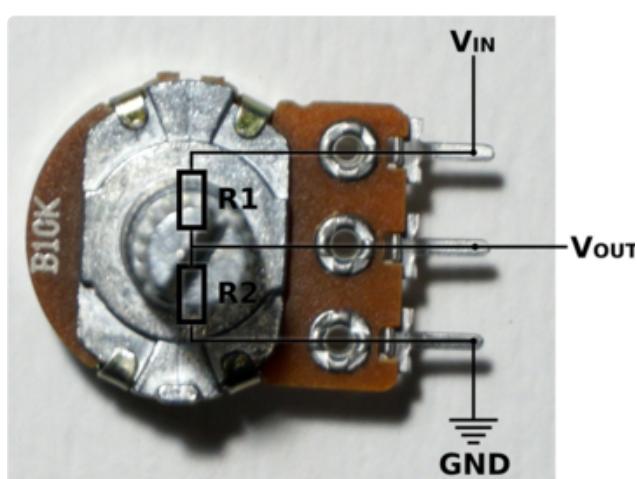


Connect one outside pin to ground  
Connect the other outside pin to voltage in (e.g. 3.3V)  
Connect the middle pin to an analog pin (e.g. A0)

# Hardware

In addition to your microcontroller board, you will need the following hardware to follow along with this example.

## Potentiometer

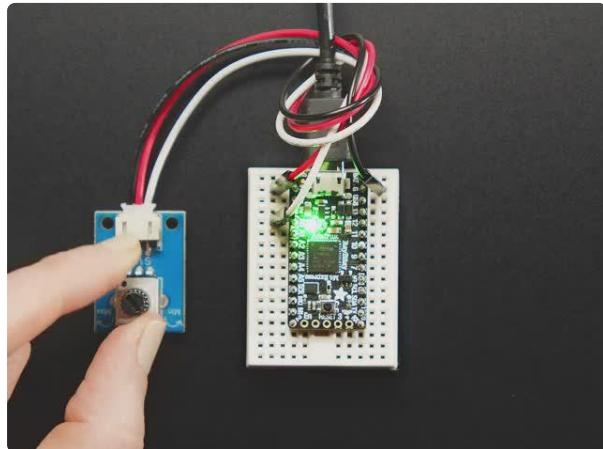


### [STEMMA Wired Potentiometer Breakout Board - 10K ohm Linear](#)

For the easiest way possible to measure twists, turn to this STEMMA potentiometer breakout (ha!). This plug-n-play pot comes with a JST-PH 2mm connector and a matching

<https://www.adafruit.com/product/4493>

## Wire Up the Potentiometer

Connect the potentiometer to your board as follows.

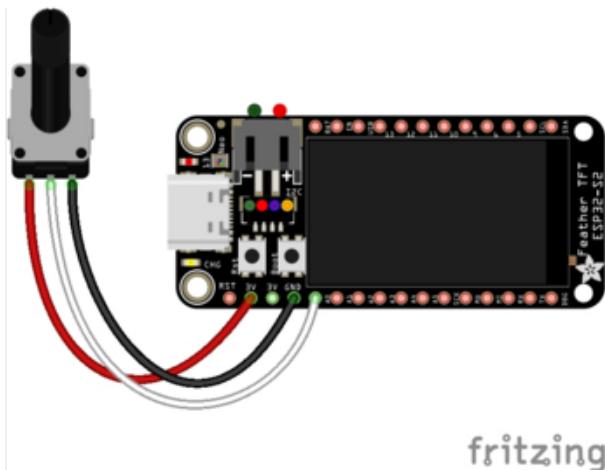

Potentiometer left pin (white wire) to Feather A0

Potentiometer center pin (red wire) to Feather 3.3V

Potentiometer right pin (black wire) to Feather GND

## Reading Analog Pin Values

CircuitPython makes it easy to read analog pin values. Simply import two modules, set up the pin, and then print the value inside a loop.

You'll need to [connect to the serial console](https://adafru.it/Bec) (<https://adafru.it/Bec>) to see the values printed out.


Save the following as code.py on your CIRCUITPY drive.

```
# SPDX-FileCopyrightText: 2021 Kattni Rembor for Adafruit Industries
# SPDX-License-Identifier: MIT
"""CircuitPython analog pin value example"""
import time
import board
import analogio

analog_pin = analogio.AnalogIn(board.A0)

while True:
    print(analog_pin.value)
    time.sleep(0.1)
```

Now, rotate the potentiometer to see the values change.

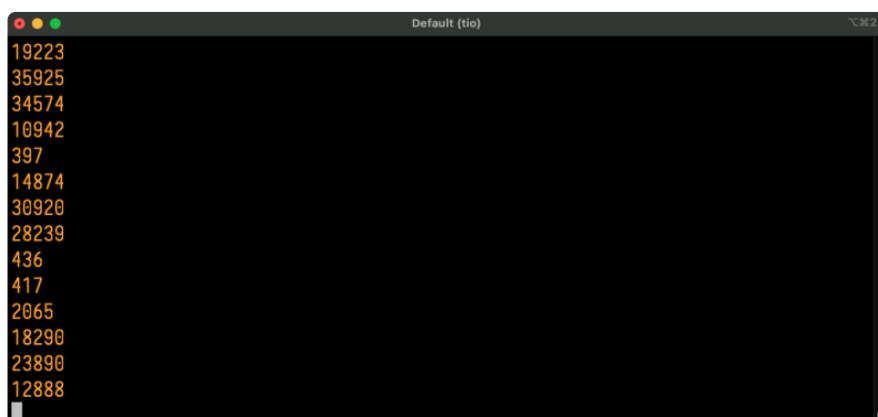

What do these values mean? In CircuitPython ADC values are put into the range of 16-bit unsigned values. This means the possible values you'll read from the ADC fall within the range of 0 to 65535 (or  $2^{16} - 1$ ). When you twist the potentiometer knob to be near ground, or as far to the left as possible, you see a value close to zero.

When you twist it to the right, the value gets bigger up to some value that is dependent on the microcontroller. Many microcontrollers get a value very close to 65535. Some, such as the ESP32-S2, have a smaller limit of about 51000 or 2.57 volts.

The code is simple. You begin by importing three modules: `time`, `board` and `analogio`. All three modules are built into CircuitPython, so you don't need to download anything to get started.

Then, you set up the analog pin by creating an `analogio.AnalogIn()` object, providing it the desired pin using the `board` module, and saving it to the variable `analog_pin`.

Finally, in the loop, you print out the analog value with `analog_pin.value`, including a `time.sleep()` to slow down the values to a human-readable rate.

## Reading Analog Voltage Values

These values don't necessarily equate to anything obvious. You can get an idea of the rotation of the potentiometer based on where in the range the value falls, but not without doing some math. Remember, you wired up the potentiometer as a voltage divider. By adding a simple function to your code, you can get a more human-readable value from the potentiometer.

You'll need to [connect to the serial console](https://adafru.it/Bec) (<https://adafru.it/Bec>) to see the values printed out.

Save the following as code.py on your CIRCUITPY drive.

```
# SPDX-FileCopyrightText: 2022 Kattni Rembor for Adafruit Industries
# SPDX-License-Identifier: MIT
"""CircuitPython Analog In Voltage Example for ESP32-S2"""
import time
import board
import analogio

analog_pin = analogio.AnalogIn(board.A0)

def get_voltage(pin):
    return (pin.value * 2.57) / 51000

while True:
    print(get_voltage(analog_pin))
    time.sleep(0.1)
```

Now, rotate the potentiometer to see the values change.

```
2.64
1.56262
0.0978429
0.025944
0.412338
1.48574
2.36241
2.64
2.64
2.64
1.95002
0.892653
0.025944
0.0249384
```

Now the values range from around 0 to 2.57! Note that due to variations in each chip, you may not get all the way to 0 or 2.57, and in some cases, you may exceed 2.57. Both of these possibilities are normal.

The example code begins with the same imports and pin setup.

This time, you include the `get_voltage` helper. This function requires that you provide an analog pin. It then maps the raw analog values, `0` to `51000`, to the voltage values, `0` to `2.57`. It does the math so you don't have to!

Finally, inside the loop, you provide the function with your `analog_pin`, and print the resulting values.

That's all there is to reading analog voltage values using CircuitPython!

---


## NeoPixel LED

Your board has a built-in RGB NeoPixel status LED. You can use CircuitPython code to control the color and brightness of this LED. It is also used to indicate the bootloader status and errors in your CircuitPython code.

A NeoPixel is what Adafruit calls the WS281x family of addressable RGB LEDs. It contains three LEDs - a red one, a green one and a blue one - along side a driver chip in a tiny package controlled by a single pin. They can be used individually (as in the built-in LED on your board), or chained together in strips or other creative form factors. NeoPixels do not light up on their own; they require a microcontroller. So, it's super convenient that the NeoPixel is built in to your microcontroller board!

This page will cover using CircuitPython to control the status RGB NeoPixel built into your microcontroller. You'll learn how to change the color and brightness, and how to make a rainbow. Time to get started!

## NeoPixel Location

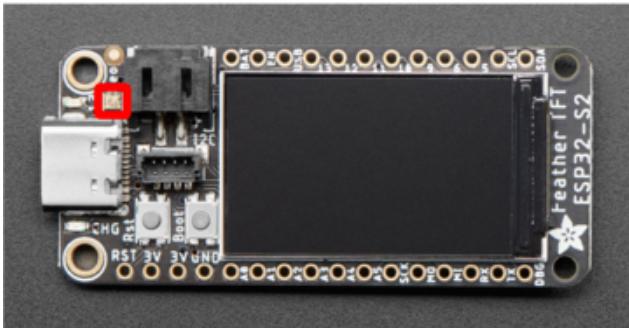

The NeoPixel (highlighted in red in the first image) is located above the USB C connector, next to the JST battery connector.

## NeoPixel Color and Brightness

To use the built-in NeoPixel on your board, you need to first install the NeoPixel library into the lib folder on your CIRCUITPY drive.

Then you need to update code.py.

Click the Download Project Bundle button below to download the necessary libraries and the code.py file in a zip file. Extract the contents of the zip file, and copy the entire lib folder and the code.py file to your CIRCUITPY drive.

```
# SPDX-FileCopyrightText: 2021 Kattni Rembor for Adafruit Industries
# SPDX-License-Identifier: MIT
"""CircuitPython status NeoPixel red, green, blue example."""
import time
import board
import neopixel

pixel = neopixel.NeoPixel(board.NEOPixel, 1)

pixel.brightness = 0.3

while True:
    pixel.fill((255, 0, 0))
    time.sleep(0.5)
    pixel.fill((0, 255, 0))
    time.sleep(0.5)
    pixel.fill((0, 0, 255))
    time.sleep(0.5)
```


Your CIRCUITPY drive contents should resemble the image below.

You should have in the Root Directory / of the CIRCUITPY drive:


- code.py

And in the lib folder on your CIRCUITPY drive:

- adafruit\_pixelbuf.mpy
- neopixel.mpy

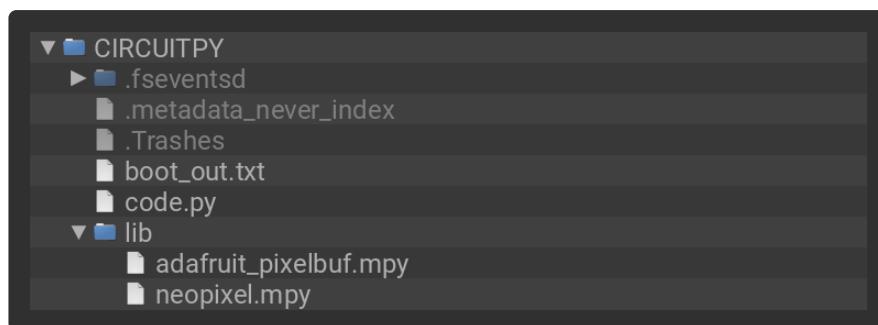

The built-in NeoPixel begins blinking red, then green, then blue, and repeats!

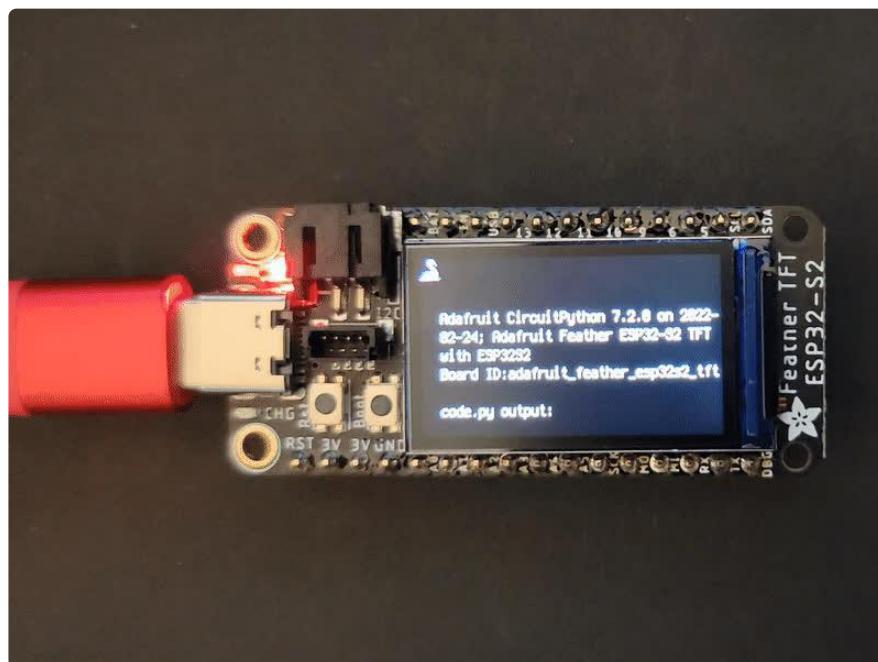

First you import two modules, `time` and `board`, and one library, `neopixel`. This makes these modules and libraries available for use in your code. The first two are modules built-in to CircuitPython, so you don't need to download anything to use those. The `neopixel` library is separate, which is why you needed to install it before getting started.

Next, you set up the NeoPixel LED. To interact with hardware in CircuitPython, your code must let the board know where to look for the hardware and what to do with it. So, you create a `neopixel.NeoPixel()` object, provide it the NeoPixel LED pin using the `board` module, and tell it the number of LEDs. You save this object to the variable `pixel`.

Then, you set the NeoPixel brightness using the `brightness` attribute. `brightness` expects float between `0` and `1.0`. A float is essentially a number with a decimal in it. The brightness value represents a percentage of maximum brightness; `0` is 0% and `1.0` is 100%. Therefore, setting `pixel.brightness = 0.3` sets the brightness to 30%. The default brightness, which is to say the brightness if you don't explicitly set it, is `1.0`. The default is really bright! That is why there is an option available to easily change the brightness.

Inside the loop, you turn the NeoPixel red for 0.5 seconds, green for 0.5 seconds, and blue for 0.5 seconds.

To turn the NeoPixel red, you "fill" it with an RGB value. Check out the section below for details on RGB colors. The RGB value for red is `(255, 0, 0)`. Note that the RGB value includes the parentheses. The `fill()` attribute expects the full RGB value including those parentheses. That is why there are two pairs of parentheses in the code.

You can change the RGB values to change the colors that the NeoPixel cycles through. Check out the list below for some examples. You can make any color of the rainbow with the right RGB value combination!

That's all there is to changing the color and setting the brightness of the built-in NeoPixel LED!

## RGB LED Colors

RGB LED colors are set using a combination of red, green, and blue, in the form of an (R, G, B) tuple. Each member of the tuple is set to a number between 0 and 255 that determines the amount of each color present. Red, green and blue in different combinations can create all the colors in the rainbow! So, for example, to set an LED to red, the tuple would be `(255, 0, 0)`, which has the maximum level of red, and no green or blue. Green would be `(0, 255, 0)`, etc. For the colors between, you set a combination, such as cyan which is `(0, 255, 255)`, with equal amounts of green and blue. If you increase all values to the same level, you get white! If you decrease all the values to 0, you turn the LED off.

Common colors include:

- red: (255, 0, 0)
- green: (0, 255, 0)
- blue: (0, 0, 255)
- cyan: (0, 255, 255)
- purple: (255, 0, 255)
- yellow: (255, 255, 0)
- white: (255, 255, 255)
- black (off): (0, 0, 0)

## NeoPixel Rainbow

You should have already installed the library necessary to use the built-in NeoPixel LED. If not, follow the steps at the beginning of the NeoPixel Color and Brightness section to install it.

Update your code.py to the following, and save.


```
# SPDX-FileCopyrightText: 2021 Kattni Rembor for Adafruit Industries
# SPDX-License-Identifier: MIT
"""CircuitPython status NeoPixel rainbow example."""
import time
import board
from rainbowio import colorwheel
import neopixel

pixel = neopixel.NeoPixel(board.NEOPixel, 1)
pixel.brightness = 0.3

def rainbow(delay):
    for color_value in range(255):
        pixel[0] = colorwheel(color_value)
        time.sleep(delay)

while True:
    rainbow(0.02)
```

The NeoPixel displays a rainbow cycle!

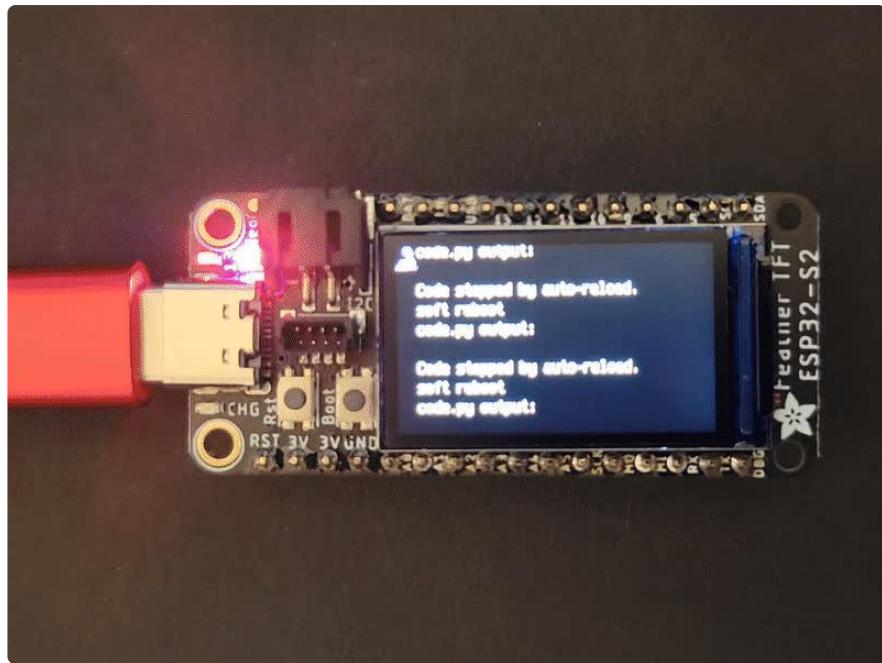

This example builds on the previous example.

First, you import the same three modules and libraries. In addition to those, you import `colorwheel`.

The NeoPixel hardware setup and brightness setting are the same.

Next, you have the `rainbow()` helper function. This helper displays the rainbow cycle. It expects a `delay` in seconds. The higher the number of seconds provided for `delay`, the slower the rainbow will cycle. The helper cycles through the values of the color wheel to create a rainbow of colors.

Inside the loop, you call the rainbow helper with a 0.2 second delay, by including `rainbow(0.2)`.


That's all there is to making rainbows using the built-in NeoPixel LED!

---

## Digital Input

The CircuitPython `digitalio` module has many applications. The basic Blink program sets up the LED as a digital output. You can just as easily set up a digital input such as a button to control the LED. This example builds on the basic Blink example, but now includes setup for a button switch. Instead of using the `time` module to blink the LED, it uses the status of the button switch to control whether the LED is turned on or off.

## LED and Button

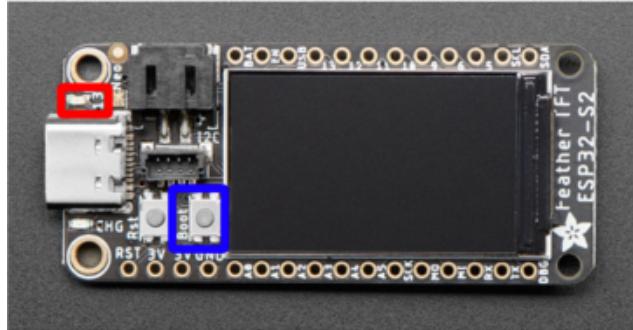

The red LED is located above the USB C connector, below the mounting hole, on the left end of the board.

The Boot button is located between the reset button and the TFT display. It is labeled Boot on the silk.

## Controlling the LED with a Button

Save the following as code.py on your CIRCUITPY drive.

```
# SPDX-FileCopyrightText: 2022 Kattni Rembor for Adafruit Industries
# SPDX-License-Identifier: MIT
"""
CircuitPython Digital Input Example - Blinking an LED using the built-in button.
"""


import board
import digitalio

led = digitalio.DigitalInOut(board.LED)
led.direction = digitalio.Direction.OUTPUT

button = digitalio.DigitalInOut(board.BUTTON)
button.switch_to_input(pull=digitalio.Pull.UP)

while True:
    if not button.value:
        led.value = True
    else:
        led.value = False
```

Now, press the button. The LED lights up! Let go of the button and the LED turns off.

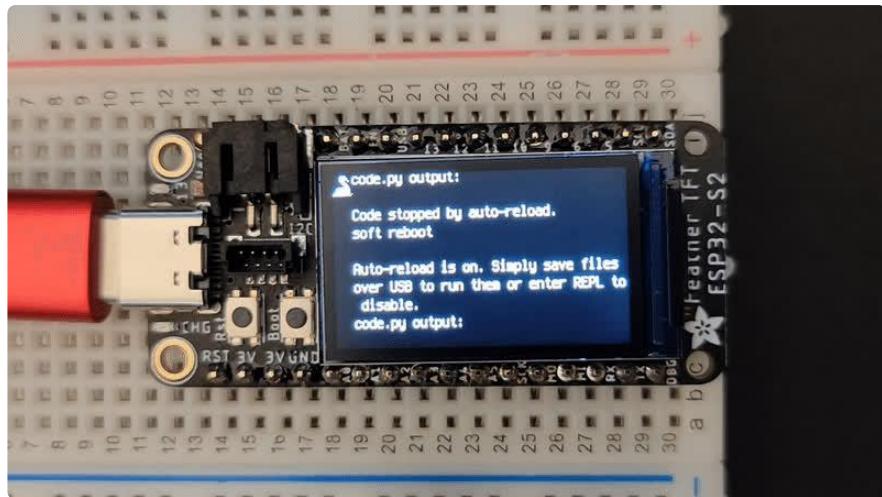

Note that the code is a little less "Pythonic" than it could be. It could also be written as `led.value = not button.value`. That way is more difficult to understand if you're new to programming, so the example is a bit longer than it needed to be to make it easier to read.

First you `import` two modules: `board` and `digitalio`. This makes these modules available for use in your code. Both are built-in to CircuitPython, so you don't need to download anything to get started.

Next, you set up the LED. To interact with hardware in CircuitPython, your code must let the board know where to look for the hardware and what to do with it. So, you create a `digitalio.DigitalInOut()` object, provide it the LED pin using the `board` module, and save it to the variable `led`. Then, you tell the pin to act as an `OUTPUT`.

You include setup for the button as well. It is similar to the LED setup, except the button is an `INPUT`, and requires a pull up.

Inside the loop, you check to see if the button is pressed, and if so, turn on the LED. Otherwise the LED is off.

That's all there is to controlling an LED with a button switch!

---

## Storage

CircuitPython-compatible microcontrollers show up as a CIRCUITPY drive when plugged into your computer, allowing you to edit code directly on the board. Perhaps you've wondered whether or not you can write data from CircuitPython directly to the board to act as a data logger. The answer is yes!

The `storage` module in CircuitPython enables you to write code that allows CircuitPython to write data to the CIRCUITPY drive. This process requires you to include a `boot.py` file on your CIRCUITPY drive, along side your `code.py` file.

The `boot.py` file is special - the code within it is executed when CircuitPython starts up, either from a hard reset or powering up the board. It is not run on soft reset, for example, if you reload the board from the serial console or the REPL. This is in contrast to the code within `code.py`, which is executed after CircuitPython is already running.

The CIRCUITPY drive is typically writable by your computer; this is what allows you to edit your code directly on the board. The reason you need a `boot.py` file is that you have to set the filesystem to be read-only by your computer to allow it to be writable by CircuitPython. This is because CircuitPython cannot write to the filesystem at the same time as your computer. Doing so can lead to filesystem corruption and loss of all content on the drive, so CircuitPython is designed to only allow one at a time.

You can only have EITHER your computer edit files on the CIRCUITPY drive, OR have CircuitPython edit files. You cannot have both writing to the CIRCUITPY drive at the same time. CircuitPython doesn't allow it!

## The boot.py File

Save the following as `boot.py` on your CIRCUITPY drive.

Click the Download Project Bundle button, open the resulting zip file, and copy the `boot.py` file to your CIRCUITPY drive.

The filesystem will NOT automatically be set to read-only on creation of this file! You'll still be able to edit files on CIRCUITPY after saving this `boot.py`.

```
# SPDX-FileCopyrightText: 2021 Kattni Rembor for Adafruit Industries
# SPDX-License-Identifier: MIT
"""
CircuitPython Essentials Storage CP Filesystem boot.py file
"""

import time
import board
import digitalio
import storage
import neopixel

pixel = neopixel.NeoPixel(board.NEOPixel, 1)

button = digitalio.DigitalInOut(board.BUTTON)
button.switch_to_input(pull=digitalio.Pull.UP)
```

```
# Turn the NeoPixel white for one second to indicate when to press the boot button.  
pixel.fill((255, 255, 255))  
time.sleep(1)  
  
# If the button is connected to ground, the filesystem is writable by CircuitPython  
storage.remount("/", readonly=button.value)
```

The `storage.remount()` command has a `readonly` keyword argument. This argument refers to the read/write state of CircuitPython. It does NOT refer to the read/write state of your computer.

When the button is pressed, it returns `False`. The `readonly` argument in `boot.py` is set to the `value` of the button. When the `value=True`, the CIRCUITPY drive is read-only to CircuitPython (and writable by your computer). When the `value=False`, the CIRCUITPY drive is writable by CircuitPython (and read-only by your computer).

## The code.py File

Save the following as `code.py` on your CIRCUITPY drive.

Click the Download Project Bundle button, open the resulting zip file, and copy the `lib` folder and the `code.py` file to your CIRCUITPY drive.

```
# SPDX-FileCopyrightText: 2021 Kattni Rembor for Adafruit Industries  
# SPDX-License-Identifier: MIT  
"""  
CircuitPython Essentials Storage CP Filesystem code.py file  
For use with boards with a built-in red LED.  
"""  
import time  
import board  
import digitalio  
import microcontroller  
  
led = digitalio.DigitalInOut(board.LED)  
led.switch_to_output()  
  
try:  
    with open("/temperature.txt", "a") as temp_log:  
        while True:  
            # The microcontroller temperature in Celsius. Include the  
            # math to do the C to F conversion here, if desired.  
            temperature = microcontroller.cpu.temperature  
  
            # Write the temperature to the temperature.txt file every 10 seconds.  
            temp_log.write('{0:.2f}\n'.format(temperature))  
            temp_log.flush()  
  
            # Blink the LED on every write...  
            led.value = True  
            time.sleep(1) # ...for one second.  
            led.value = False # Then turn it off...  
            time.sleep(9) # ...for the other 9 seconds.  
  
except OSError as e: # When the filesystem is NOT writable by CircuitPython...
```

```
delay = 0.5 # ...blink the LED every half second.  
if e.args[0] == 28: # If the file system is full...  
    delay = 0.15 # ...blink the LED every 0.15 seconds!  
while True:  
    led.value = not led.value  
    time.sleep(delay)
```

First you import the necessary modules to make them available to your code, and you set up the LED.

Next you have a `try / except` block, which is used to handle the three potential states of the board: read/write, read-only, or filesystem full. The code in the `try` block will run if the filesystem is writable by CircuitPython. The code in the `except` block will run if the filesystem is read-only to CircuitPython OR if the filesystem is full.


Under the `try`, you open a `temperature.txt` log file. If it is the first time, it will create the file. For all subsequent times, it opens the file and appends data. Inside the loop, you get the microcontroller temperature value and assign it to a `temperature` variable. Then, you write the temperature value to the log file, followed by clearing the buffer for the next time through the loop. The temperature data is limited to two decimal points to save space for more data. Finally, you turn the LED on for one second, and then turn it off for the next nine seconds. Essentially, you blink the LED for one second every time the temperature is logged to the file which happens every ten seconds.

Next you `except` an `OSError`. An `OSError` number 30 is raised when trying to create, open or write to a file on a filesystem that is read-only to CircuitPython. If any `OSError` other than 28 is raised (e.g. 30), the `delay` is set to 0.5 seconds. If the filesystem fills up, CircuitPython raises `OSError` number 28. If `OSError` number 28 is raised, the `delay` is set to 0.15 seconds. Inside the loop, the LED is turned on for the duration of the `delay`, and turned off for the duration of the `delay`, effectively blinking the LED at the speed of the `delay`.

## Logging the Temperature

At the moment, the LED on your board should be blinking once every half second. This indicates that the board is currently read-only to CircuitPython, and writable to your computer, allowing you to update the files on your CIRCUITPY drive as needed.

The way the code in `boot.py` works is, it checks to see if the button is pressed when the board is powered on and `boot.py` is run. To begin logging the temperature, you must press the button.

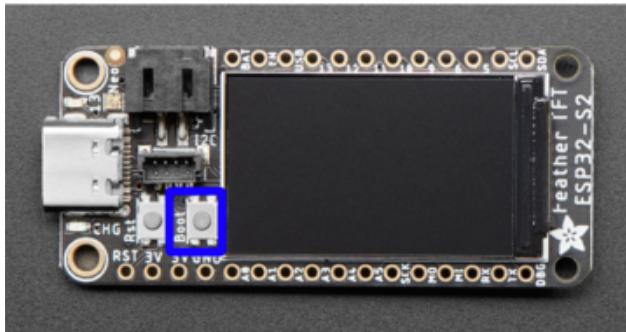

The boot button (highlighted in blue) is between the reset button and the TFT display. It is labeled Boot on the silk.

While holding down the button, you need to either hard reset the board by pressing the reset button, or by unplugging the USB cable and plugging it back in. This will run the code within `boot.py` and set your board to writable by CircuitPython, and therefore, read-only by the computer.

For the Feather TFT, the button-press timing is a little different. Press it when the NeoPixel LED turns white!

For the Feather TFT, it's difficult to get the timing right for when to press the boot button. So, the `boot.py` file includes turning the NeoPixel on bright white for one second. Press the boot button when the NeoPixel is white!

The red blinking will slow down to one second long, every 10 seconds. This indicates that the board is currently logging the temperature, once every 10 seconds.

As long as the button is pressed, you can plug the board in anywhere you have USB power, and log the temperature in that location! The temperature is not the ambient temperature; it is the temperature inside the microcontroller, which will typically be higher than ambient temperature. However, running only this code, once the microcontroller temperature stabilises, it should at least be consistent, and therefore usable for tracking changes in ambient temperature.

If the LED starts blinking really quickly, it means the filesystem is full! You'll need to get your temperature data and delete the temperature log file to begin again.

That's all there is to logging the temperature using CircuitPython!

## Recovering a Read-Only Filesystem

In the event that you make your CIRCUITPY drive read-only to your computer, and for some reason, it doesn't easily switch back to writable, there are a couple of things you can do to recover the filesystem.

Even when the CIRCUITPY drive is read-only to your computer, you can still access the serial console and REPL. If you connect to the serial console and enter the REPL, you can run either of the following two sets of commands at the `>>>` prompt. You do not need to run both.

First, you can rename your `boot.py` file to something other than `boot.py`.

```
import os
os.rename("boot.py", "something_else.py")
```

Alternatively, you can remove the `boot.py` file altogether.

```
import os
os.remove("boot.py")
```

Then, restart the board by either hitting the reset button or unplugging USB and plugging it back in. CIRCUITPY should show up on your computer as usual, but now it should be writable by your computer.

---

## Capacitive Touch


Your microcontroller board has capacitive touch capabilities on multiple pins. The CircuitPython `touchio` module makes it simple to detect when you touch a pin, enabling you to use it as an input.

This section first covers using the `touchio` module to read touches on one pin. You'll learn how to setup the pin in your program, and read the touch status. Then, you'll learn how to read touches on multiple pins in a single example. Time to get started!

## One Capacitive Touch Pin

The first example covered here will show you how to read touches on one pin.

## Pin Location

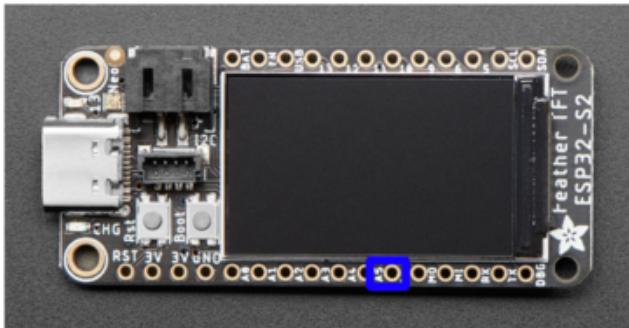

The D5 pin (highlighted in blue) is located along the bottom edge of the board, between A4 and SCK. It is labeled A5 on the silk (the pin has multiple name options).

## Reading Touch on the Pin

Download the following file by clicking the Download Project Bundle button. Drag the contents of the bundle, the code.py file, to your CIRCUITPY drive.

Then, [connect to the serial console \(https://adafru.it/Bec\)](https://adafru.it/Bec).


```
# SPDX-FileCopyrightText: 2021 Kattni Rembor for Adafruit Industries
# SPDX-License-Identifier: MIT
"""
CircuitPython Capacitive Touch Pin Example for ESP32-S2.
Print to the serial console when one pin is touched.
"""
import time
import board
import touchio

touch = touchio.TouchIn(board.D8)

while True:
    if touch.value:
        print("Pin touched!")
    time.sleep(0.1)
```

Touch is designed to calibrate on board startup. In some cases, the ESP32-S2 does not calibrate properly, and the board running this code will report the pin as "touched" when you are not touching it. You can update the threshold manually in these cases to resolve this issue. See the end of this page for details.

Now touch the pin indicated in the diagram above. You'll see **Pin touched!** printed to the serial console!

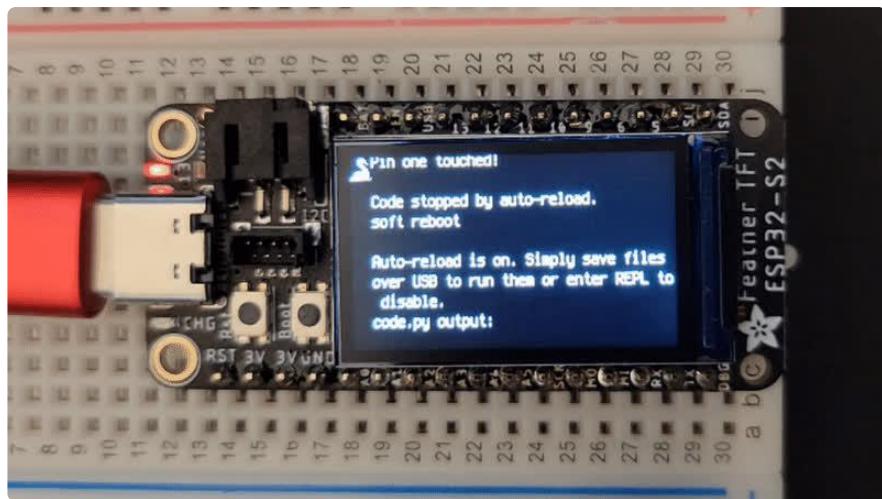

First you `import` three modules: `time`, `board` and `touchio`. This makes these modules available for use in your code. All three are built-in to CircuitPython, so you don't find any library files in the Project Bundle.

Next, you create the `touchio.TouchIn()` object, and provide it the pin name using the `board` module. You save that to the `touch` variable.


Inside the loop, you check to see if thepin is touched. If so, you print to the serial console. Finally, you include a `time.sleep()` to slow it down a bit so the output is readable.

That's all there is to reading touch on a single pin using `touchio` in CircuitPython!

## Multiple Capacitive Touch Pins

The next example shows you how to read touches on multiple pins in a single program.

## Pin Location

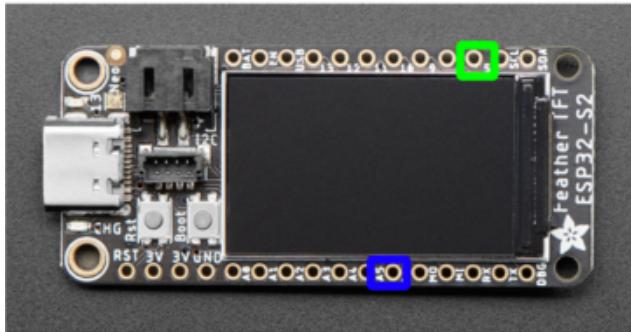

The A5 pin (highlighted in blue) is located along the bottom edge of the board, between A4 and SCK. It is labeled A5 on the silk.

The D5 pin (highlighted in green) is located along the top edge of the board, between D6 and SCL. It is labeled 5 on the silk.

## Reading Touch on the Pins

Download the following file by clicking the Download Project Bundle button. Drag the contents of the bundle, the code.py file, to your CIRCUITPY drive.

Then, [connect to the serial console \(<https://adafru.it/Bec>\)](https://adafru.it/Bec).

```
# SPDX-FileCopyrightText: 2021 Kattni Rembor for Adafruit Industries
# SPDX-License-Identifier: MIT
"""
CircuitPython Capacitive Two Touch Pin Example for ESP32-S2
Print to the serial console when a pin is touched.
"""
import time
import board
import touchio

touch_one = touchio.TouchIn(board.D8)
touch_two = touchio.TouchIn(board.D5)

while True:
    if touch_one.value:
        print("Pin one touched!")
    if touch_two.value:
        print("Pin two touched!")
    time.sleep(0.1)
```

Touch is designed to calibrate on board startup. In some cases, the ESP32-S2 does not calibrate properly, and the board running this code will report the pins as "touched" when you are not touching them. You can update the threshold manually in these cases to resolve this issue. See the end of this page for details.

Touch the pins to see the messages printed to the serial console!


This example builds on the first. The imports remain the same.

The `touchio.TouchIn()` object is created, but is instead saved to `touch_one`. A second `touchio.TouchIn()` object is also created, the second pin is provided to it using the `board` module, and is saved to `touch_two`.

Inside the loop, we check to see if pin one and pin two are touched, and if so, print to the serial console `Pin one touched!` and `Pin two touched!`, respectively. The same `time.sleep()` is included.

If more touch-capable pins are available on your board, you can easily add them by expanding on this example!

## The Available Touch-Capable Pins

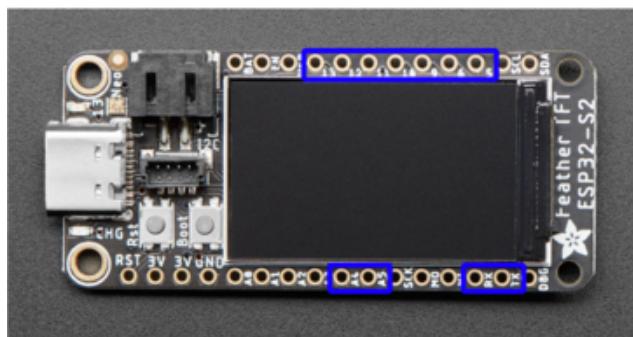

A4 - CircuitPython `board.A4`. Arduino [14](#).

A5 - CircuitPython `board.A5`. Arduino [8](#).

TX - CircuitPython `board.TX`. Arduino [1](#).

RX - CircuitPython `board.RX`. Arduino [2](#).

D13 - CircuitPython `board.D13`. Arduino [13](#).

D12 - CircuitPython `board.D12`. Arduino [12](#).

D11 - CircuitPython `board.D11`. Arduino [11](#).

D10 - CircuitPython `board.D10`. Arduino [10](#).

D9 - CircuitPython `board.D9`. Arduino [9](#).

D6 - CircuitPython `board.D6`. Arduino [6](#).

D5 - CircuitPython `board.D5`. Arduino [5](#).

## Setting Touch Threshold Manually

In some cases, the ESP32-S2 fails to calibrate the touch threshold properly on board startup. In those cases, the board running this code will show the pin as touched (printed in the serial console) when you are not touching it. In this event, you can set the threshold manually. Setting the threshold manually involves two steps: obtaining the current touch `threshold` and `raw_value`, and setting the `threshold` once that information is known.

First, add the following to your code inside the loop (after the `while True:` which is included below for reference). The following code works exactly as-is for the one-pin example. Duplicate these two lines, and update `touch` to `touch_one` and `touch_two` for the two-pin example.

```
while True:  
    print("Raw value: ", touch.raw_value)  
    print("Threshold: ", touch.threshold)
```

Now, if you haven't already, connect to the serial console. You will see two new lines of information printed out. Make a mental note of what the current threshold is. The more important piece of information is the raw value. Note what the value is when you are not touching the pin. Now, touch the pin, and make a note of that value. The value you choose for updating `threshold` should be higher than when you are not touching the pin, and lower than when you are.

Once you've chosen your value, you can delete the lines you added above. Then, add the following line of code BEFORE the loop, but after the touch object is created. Replace `NEW_VALUE` with the value you chose based on the data provided. Again, for use with the two-pin example, duplicate these two lines, and update `touch` to `touch_on` and `touch_two`.

```
touch.threshold = NEW_VALUE
```

Now, your board should automatically reload, and you should see nothing printed to the serial console. Try touching the pin. **Pin touched!**

If you're still seeing it printing to the serial console when not touched, try changing the `threshold` value to something higher than you currently have.

That's all there is to manually setting the threshold for a touch pin!


---

## CPU Temperature

There is a temperature sensor built into the CPU on your microcontroller board. It reads the internal CPU temperature, which varies depending on how long the board has been running or how intense your code is.

CircuitPython makes it really simple to read this data from the temperature sensor built into the microcontroller. Using the built-in `microcontroller` module, you can easily read the temperature.

## Microcontroller Location

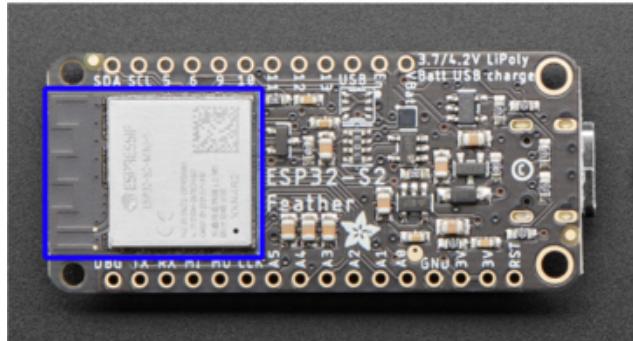

The ESP32-S2 microcontroller (highlighted in blue) is located on the bottom of the board, opposite the USB C connector.

## Reading the Microcontroller Temperature

The data is read using two lines of code. All necessary modules are built into CircuitPython, so you don't need to download any extra files to get started.

Connect to the serial console (<https://adafru.it/Bec>), and then update your code.py to the following and save.

```
# SPDX-FileCopyrightText: 2021 Kattni Rembor for Adafruit Industries
# SPDX-License-Identifier: MIT
"""CircuitPython CPU temperature example in Celsius"""
import time
import microcontroller

while True:
    print(microcontroller.cpu.temperature)
    time.sleep(0.15)
```

```
CircuitPython REPL
40.7144
40.2463
41.1825
41.6507
40.7144
40.7144
40.2463
```

The CPU temperature in Celsius is printed out to the serial console!

Try putting your finger on the microcontroller to see the temperature change.


The code is simple. First you import two modules: `time` and `microcontroller`. Then, inside the loop, you print the microcontroller CPU temperature, and the `time.sleep()` slows down the print enough to be readable. That's it!

You can easily print out the temperature in Fahrenheit by adding a little math to your code, using this simple formula: Celsius \* (9/5) + 32.

Update your code.py to the following, and save.

```
# SPDX-FileCopyrightText: 2021 Kattni Rembor for Adafruit Industries
# SPDX-License-Identifier: MIT
"""CircuitPython CPU temperature example in Fahrenheit"""
import time
import microcontroller

while True:
    print(microcontroller.cpu.temperature * (9 / 5) + 32)
    time.sleep(0.15)
```

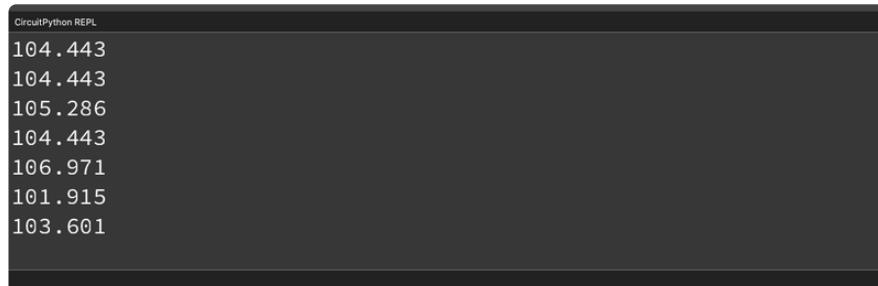

The CPU temperature in Fahrenheit is printed out to the serial console!

That's all there is to reading the CPU temperature using CircuitPython!

## Arduino IDE Setup

The ESP32-S2 bootloader does not have USB serial support for Windows 7 or 8. (See <https://github.com/espressif/arduino-esp32/issues/5994>) please update to version 10 which is supported by espressif!


The first thing you will need to do is to download the latest release of the Arduino IDE. You will need to be using version 1.8 or higher for this guide

Arduino IDE Download


<https://adafru.it/f1P>

The ESP32-S2 Arduino board support package is currently part of the 2.0.0 or later release. To use the ESP32-S2 with Arduino, you'll need to follow the steps below for your operating system. You can also [check out the Espressif Arduino repository for the most up to date details on how to install it \(<https://adafru.it/weF>\)](#).

After you have downloaded and installed the latest version of Arduino IDE, you will need to start the IDE and navigate to the Preferences menu. You can access it from the File menu in Windows or Linux, or the Arduino menu on OS X.

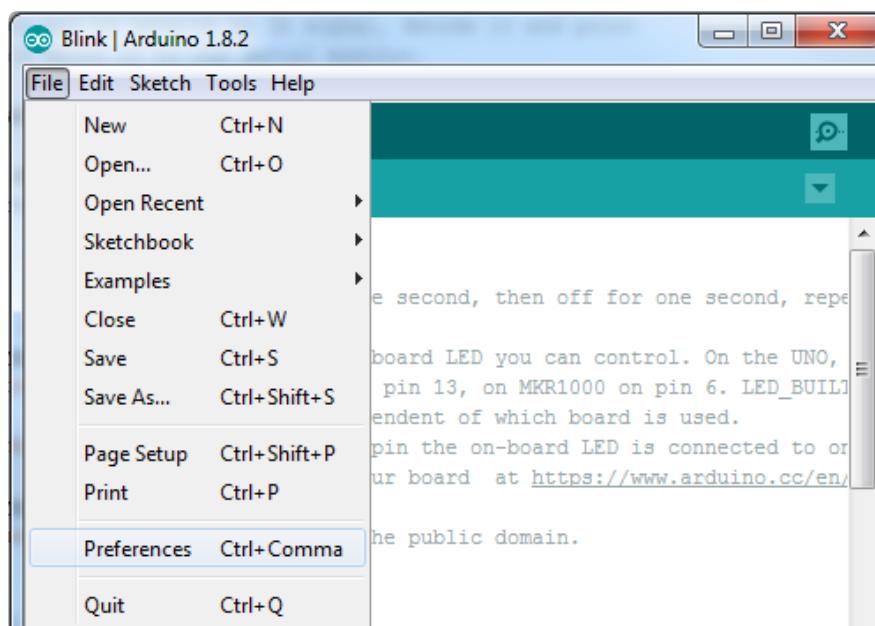


A dialog will pop up just like the one shown below.

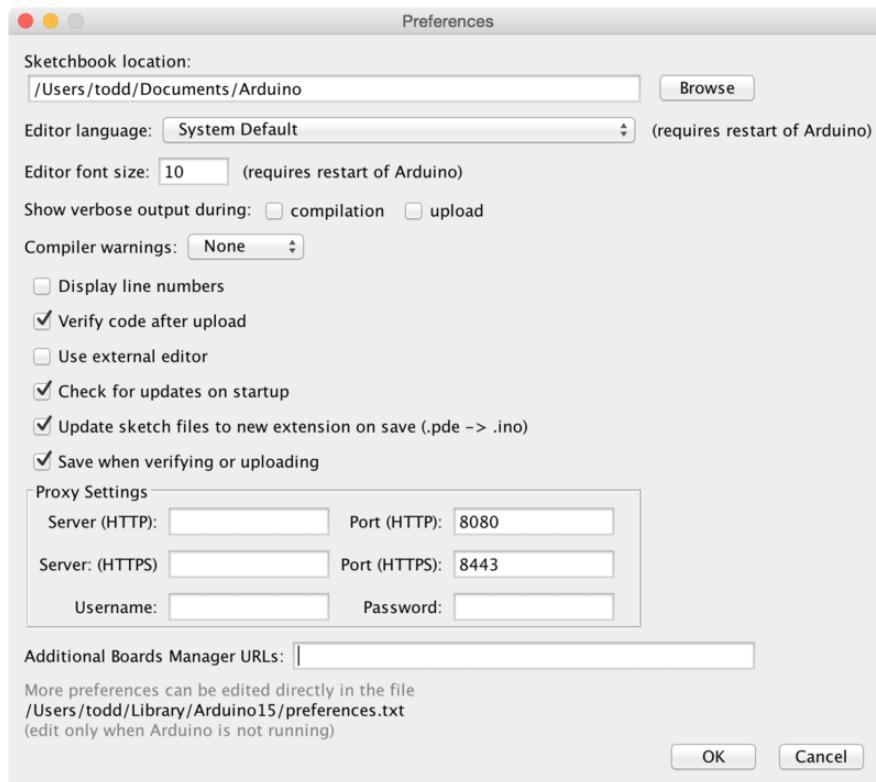

We will be adding a URL to the new Additional Boards Manager URLs option. The list of URLs is comma separated, and you will only have to add each URL once. New Adafruit boards and updates to existing boards will automatically be picked up by the Board Manager each time it is opened. The URLs point to index files that the Board Manager uses to build the list of available & installed boards.

To find the most up to date list of URLs you can add, you can visit the list of [third party board URLs on the Arduino IDE wiki](#) (<https://adafru.it/f7U>). We will only need to add one URL to the IDE in this example, but you can add multiple URLs by separating them with commas. Copy and paste the link below into the Additional Boards Manager URLs option in the Arduino IDE preferences.


[https://raw.githubusercontent.com/espressif/arduino-esp32/gh-pages/package\\_esp32\\_dev\\_index.json](https://raw.githubusercontent.com/espressif/arduino-esp32/gh-pages/package_esp32_dev_index.json)

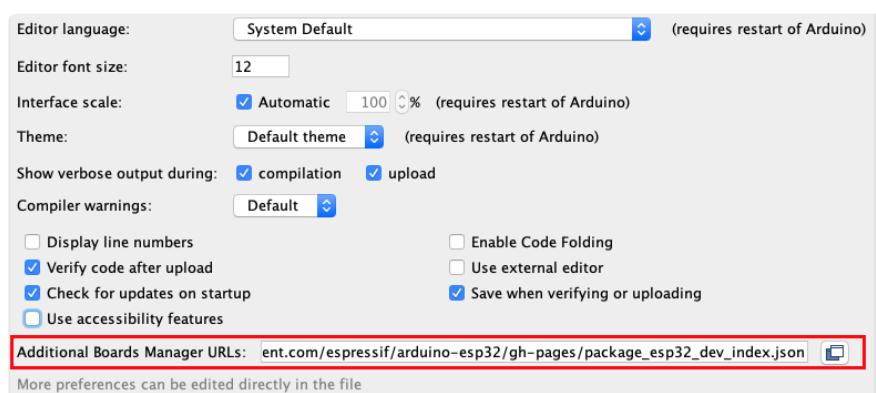

If you have multiple boards you want to support, say ESP8266 and Adafruit, have both URLs in the text box separated by a comma (,)

Once done click OK to save the new preference settings.


The next step is to actually install the Board Support Package (BSP). Go to the Tools → Board → Board Manager submenu. A dialog should come up with various BSPs. Search for esp32.

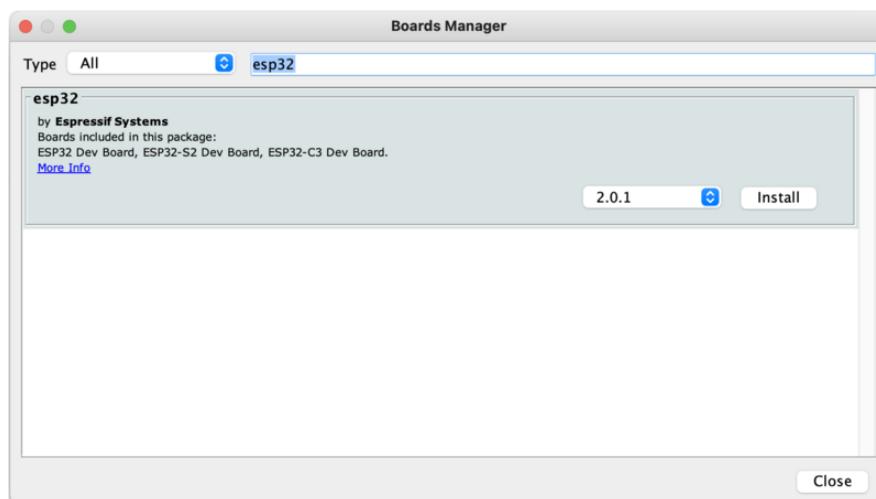

Click the Install button and wait for it to finish. Once it is finished, you can close the dialog.

In the Tools → Board submenu you should see ESP32 Arduino and in that dropdown it should contain the ESP32 boards along with all the latest ESP32-S2 boards.

Look for the board called Adafruit Feather ESP32-S2 TFT.

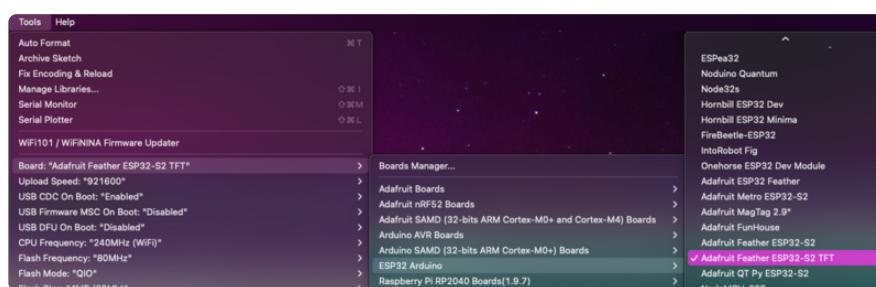


# Using with Arduino IDE

## Blink

Now you can upload your first blink sketch!

Plug in the ESP32-S2/S3 board and wait for it to be recognized by the OS (just takes a few seconds).

## Select ESP32-S2/S3 Board in Arduino IDE

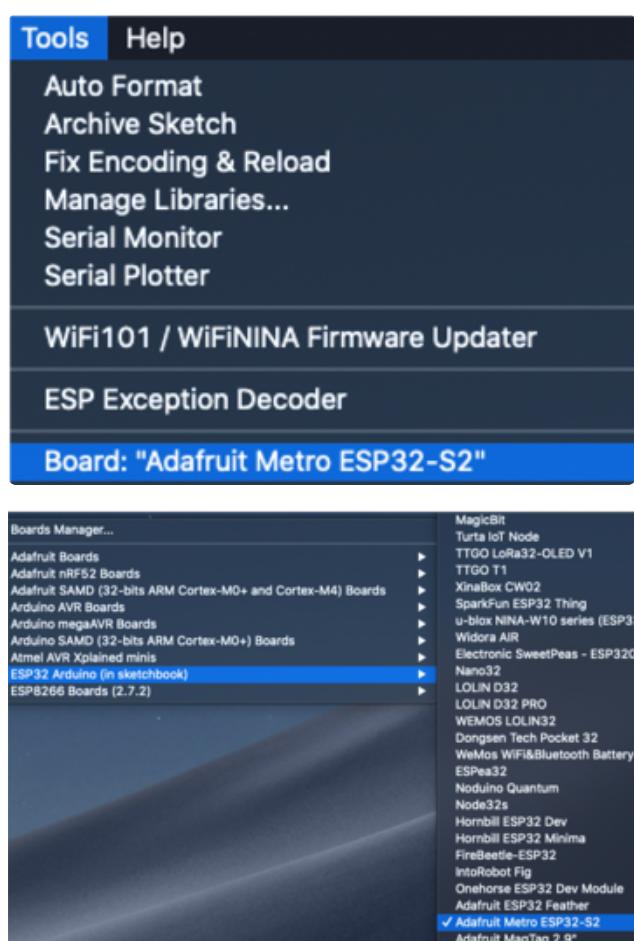

On the Arduino IDE, click:


Tools -> Board -> ESP32 Arduino -> Your Adafruit ESP32-S2/S3 board

The screenshot shows Metro S2 but you may have a different board. Make sure the name matches the exact product you purchased. If you don't see your board, make sure you have the latest version of the ESP32 board support package

## Launch ESP32-S2/S3 ROM Bootloader

ESP32-S2/S3 support in Arduino uses native USB which can crash. If you ever DON'T see a serial/COM port, you can always manually enter bootloading mode. This bootloader is in ROM, it is 'un-brickable' so you can always use this

technique to get into the bootloader. However, after uploading your Arduino code you **MUST** press reset to start the sketch

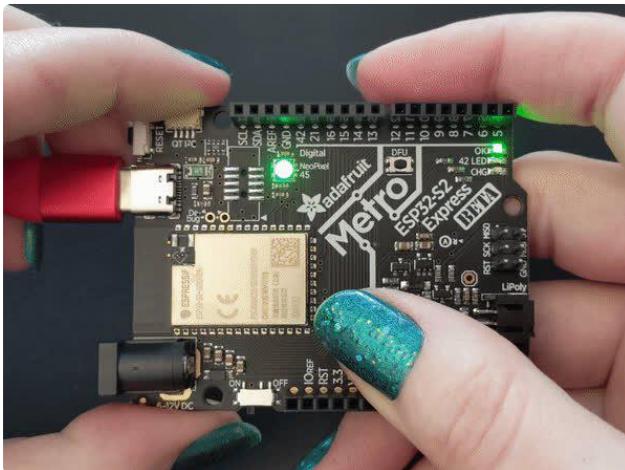


Before we upload a sketch, place your **ESP32-S2/S3** board into ROM bootloader mode (<https://adafru.it/OsC>).

Look for the Reset button and a second DFU / BOOT0 button

HOLD down the DFU/Boot0 button while you click Reset. Then release DFU/Boot0 button

The GIF shows a Metro S2 but your board may look different. It will still have BOOT and Reset buttons somewhere

It should appear under Tools -> Port as **ESP32-S2/S3 Dev Module**.

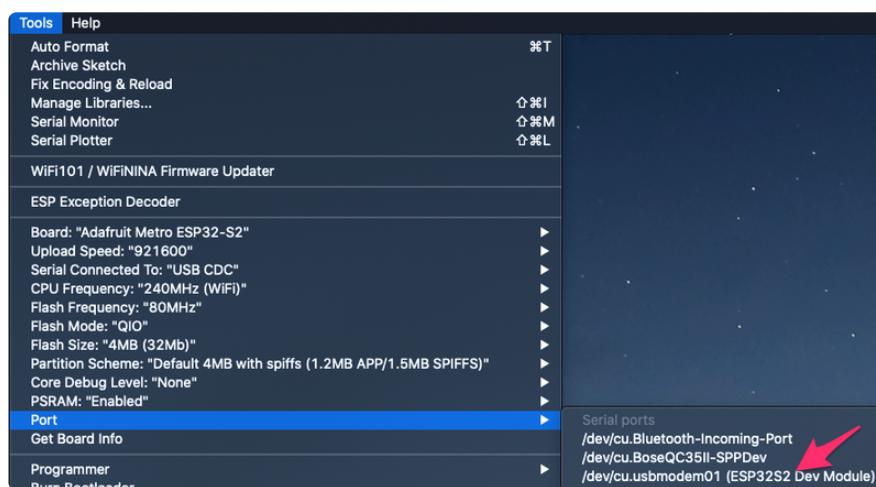

Do not select any other port than the one that is called "**ESP32S2 Dev Module**" or "**ESP32S3 Dev Module**"

## Load Blink Sketch

Now open up this Blink example in a new sketch window

```
// the setup function runs once when you press reset or power the board
void setup() {
    // initialize built in LED pin as an output.
    pinMode(LED_BUILTIN, OUTPUT);
```

```

// initialize USB serial converter so we have a port created
Serial.begin();
}

// the loop function runs over and over again forever
void loop() {
    digitalWrite(LED_BUILTIN, HIGH);      // turn the LED on (HIGH is the voltage level)
    delay(1000);                      // wait for a second
    digitalWrite(LED_BUILTIN, LOW);       // turn the LED off by making the voltage LOW
    delay(1000);                      // wait for a second
}

```

Note that we use `LED_BUILTIN` not pin 13 for the LED pin. That's because we don't always use pin 13 for the LED on boards. For example, on the Metro ESP32-S2 the LED is on pin 42!

And click upload! After uploading, you may see something like this:

```

To suppress this error, set --after option to 'no_reset'.
Writing at 0x0002c000... (94 %)
Writing at 0x0002b800... (96 %)
Writing at 0x0002c000... (98 %)
Writing at 0x0002c800... (100 %)
Wrote 207904 bytes (117510 compressed) at 0x00010000 in 1.7 seconds (effective Hash of data verified.
Compressed 3072 bytes to 128...
Writing at 0x00008000... (100 %)
Wrote 3072 bytes (128 compressed) at 0x00008000 in 0.0 seconds (effective 4497 Hash of data verified.

Leaving...
Hard resetting via RTS pin...
ERROR: ESP32-S2 chip was placed into download mode using GPIO0.
esptool.py can not exit the download mode over USB. To run the app, reset the board.
To suppress this error, set --after option to 'no_reset'.
To suppress this error, set --after option to 'no_reset'.


```

And click upload! After uploading, you may see something like this, warning you that we could not get out of reset.

This is normal! Press the RESET button on your board to launch the sketch

That's it, you will be able to see the red LED blink. You will also see a new serial port created.

You may call `Serial.begin();` in your sketch to create the serial port so don't forget it, it is not required for other Arduinos or previous ESP boards!

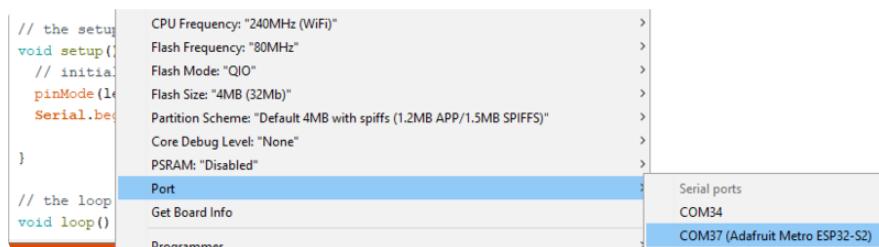

You can now select the new serial port name which will be different than the bootloader serial port. Arduino IDE will try to use auto-reset to automatically put the board into bootloader mode when you ask it to upload new code


If you ever DON'T see a serial port, or something is not working out with upload you can always manually enter bootloader mode:

- Reset board into ROM bootloader with DFU/BOOT0 + Reset buttons
  - Select the ESP32S2/S3 Dev Board ROM bootloader serial port in Tools->Port menu
  - Upload sketch
  - Click reset button to launch code
- 

## Arduino Blink

The first and most basic program you can upload to your Arduino is the classic Blink sketch. This takes something on the board and makes it, well, blink! On and off. It's a great way to make sure everything is working and you're uploading your sketch to the right board and right configuration.

When all else fails, you can always come back to Blink!

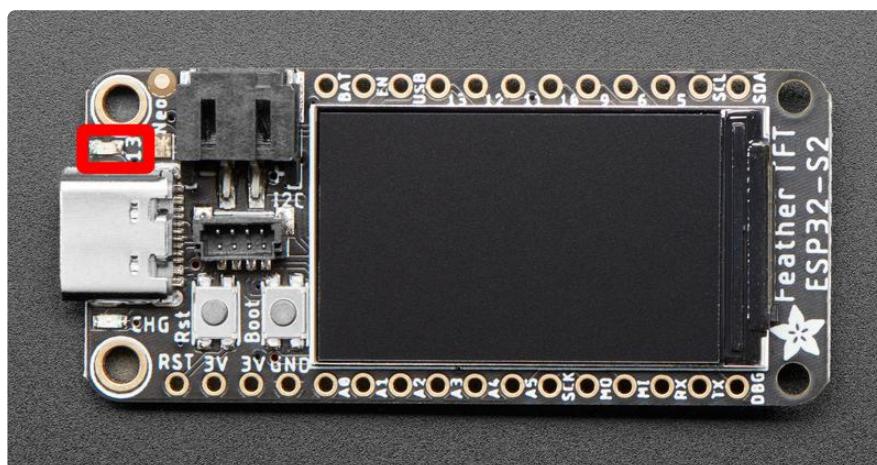

## Pre-Flight Check: Get Arduino IDE & Hardware Set Up

This lesson assumes you have Arduino IDE set up. This is a generalized checklist, some elements may not apply to your hardware. If you haven't yet, check the previous steps in the guide to make sure you:


- Install the very latest Arduino IDE for Desktop (not all boards are supported by the Web IDE so we don't recommend it)


- Install any board support packages (BSP) required for your hardware. Some boards are built in defaults on the IDE, but lots are not! You may need to install plug-in support which is called the BSP.
- Get a Data/Sync USB cable for connecting your hardware. A significant amount of problems folks have stem from not having a USB cable with data pins. Yes, these cursed cables roam the land, making your life hard. If you find a USB cable that doesn't work for data/sync, throw it away immediately! There is no need to keep it around, cables are very inexpensive these days.
- Install any drivers required - If you have a board with a FTDI or CP210x chip, you may need to get separate drivers. If your board has native USB, it probably doesn't need anything. After installing, reboot to make sure the driver sinks in.
- Connect the board to your computer. If your board has a power LED, make sure its lit. Is there a power switch? Make sure its turned On!

## Start up Arduino IDE and Select Board/Port

OK now you are prepared! Open the Arduino IDE on your computer. Now you have to tell the IDE what board you are using, and how you want to connect to it.


In the IDE find the Tools menu. You will use this to select the board. If you switch boards, you must switch the selection! So always double-check before you upload code in a new session.

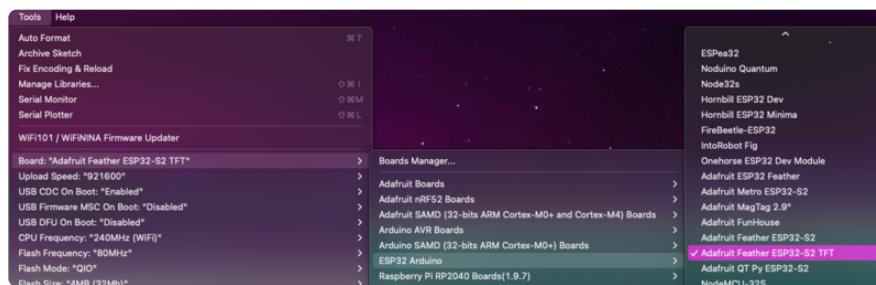

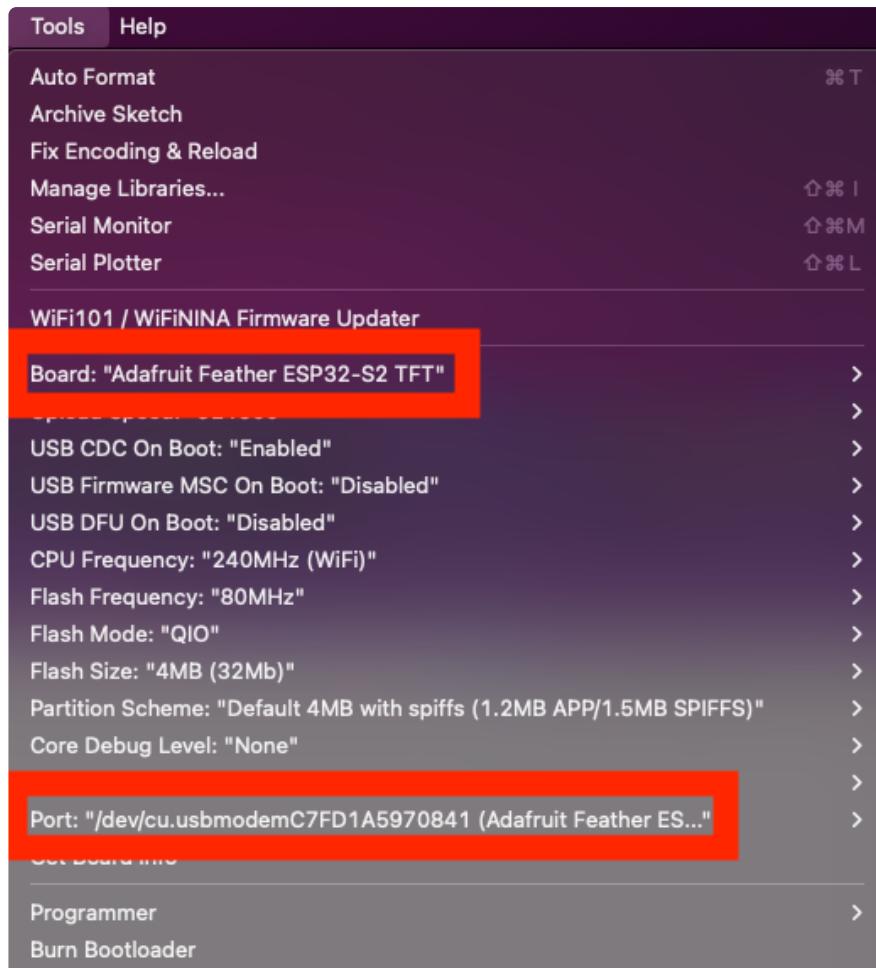

## New Blink Sketch

OK lets make a new blink sketch! From the File menu, select New

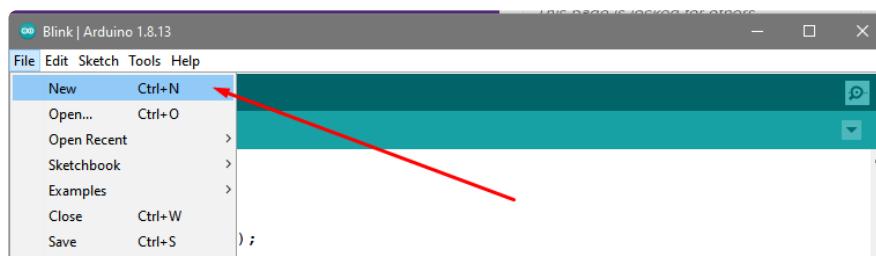

Then in the new window, copy and paste this text:

```
int led = LED_BUILTIN;

void setup() {
  // Some boards work best if we also make a serial connection
  Serial.begin(115200);


  // set LED to be an output pin
  pinMode(led, OUTPUT);
}
```

```
void loop() {  
    // Say hi!  
    Serial.println("Hello!");  
  
    digitalWrite(led, HIGH);    // turn the LED on (HIGH is the voltage level)  
    delay(500);                // wait for a half second  
    digitalWrite(led, LOW);     // turn the LED off by making the voltage LOW  
    delay(500);                // wait for a half second  
}
```

Note that in this example, we are not only blinking the LED but also printing to the Serial monitor, think of it as a little bonus to test the serial connection.

One note you'll see is that we reference the LED with the constant `LED_BUILTIN` rather than a number. That's because, historically, the built in LED was on pin 13 for Arduinos. But in the decades since, boards don't always have a pin 13, or maybe it could not be used for an LED. So the LED could have moved to another pin. It's best to use `LED_BUILTIN` so you don't get the pin number confused!

The red LED is located next to the USB connector, and is labeled 13 on the silk.

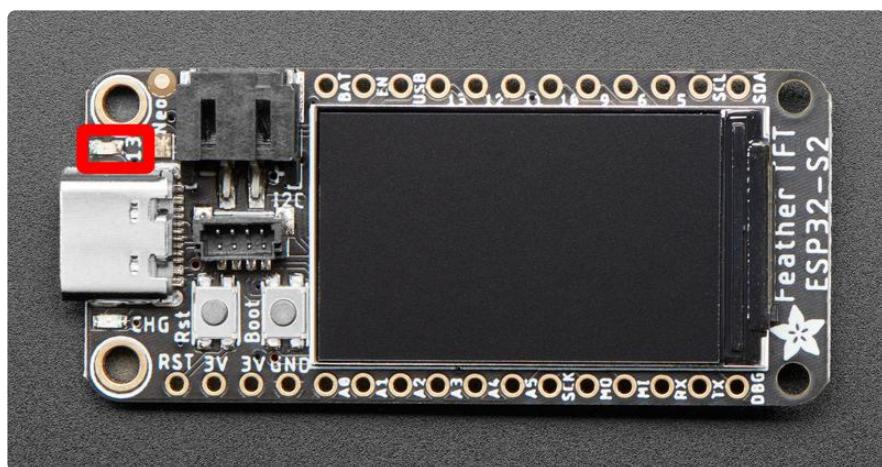

On the Feather TFT ESP32-S2, the red LED is on pin 13.


## Verify (Compile) Sketch

OK now you can click the Verify button to convert the sketch into binary data to be uploaded to the board.

Note that Verifying a sketch is the same as Compiling a sketch - so we will use the words interchangeably




During verification/compilation, the computer will do a bunch of work to collect all the libraries and code and the results will appear in the bottom window of the IDE

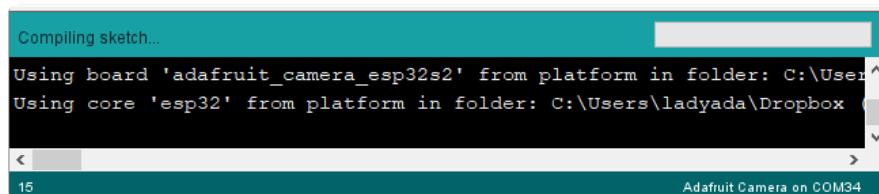

If something went wrong with compilation, you will get red warning/error text in the bottom window letting you know what the error was. It will also highlight the line with an error

For example, here I had the wrong board selected - and the selected board does not have a built in LED!

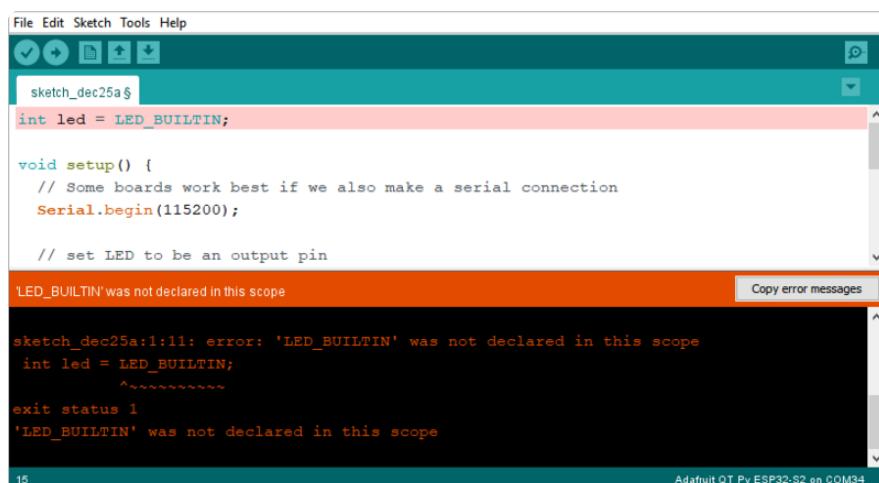

Here's another common error, in my haste I forgot to add a ; at the end of a line. The compiler warns me that it's looking for one - note that the error is actually a few lines up!

The screenshot shows the Arduino IDE interface with a sketch named "sketch\_dec25a". In the code editor, there is a syntax error highlighted with a red arrow pointing to the word "LED\_BUILTIN". The error message in the status bar says "expected ',' or ';' before 'void'". Below the code editor, the serial monitor window displays the error message: "sketch\_dec25a:3:1: error: expected ',' or ';' before 'void' void setup() { ^~~~ exit status 1 expected ',' or ';' before 'void'".

Turning on detailed compilation warnings and output can be very helpful sometimes - Its in Preferences under "Show Verbose Output During:" and check the Compilation button. If you ever need to get help from others, be sure to do this and then provide all the text that is output. It can assist in nailing down what happened!

On success you will see something like this white text output and the message Done compiling. in the message area.

The screenshot shows the Arduino IDE interface with a message "Done compiling." in the status bar. Below it, the serial monitor window displays the compilation statistics: "Sketch uses 219874 bytes (16%) of program storage space. Maximum is 1310720 bytes. Global variables use 17956 bytes (5%) of dynamic memory, leaving 309724 bytes for local variables".

## Upload Sketch

Once the code is verified/compiling cleanly you can upload it to your board. Click the Upload button

The screenshot shows the Arduino IDE interface with the "Upload" button highlighted by a red arrow. The code editor contains the same sketch as before. The status bar indicates "sketch\_dec25a | Arduino 1.8.13".

The IDE will try to compile the sketch again for good measure, then it will try to connect to the board and upload a the file.


This is actually one of the hardest parts for beginners because it's where a lot of things can go wrong.

However, let's start with what it looks like on success! Here's what your board upload process looks like when it goes right:

```
Done uploading.  
Writing at 0x002e0653... (79 %)  
Writing at 0x002e072... (81 %)  
Writing at 0x002e0a14... (83 %)  
Writing at 0x002e0454... (85 %)  
Writing at 0x002e0e67... (87 %)  
Writing at 0x002f17c3... (89 %)  
Writing at 0x002f214d... (91 %)  
Writing at 0x002f2ccf... (93 %)  
Writing at 0x002f38ee... (95 %)  
Writing at 0x002f4376... (97 %)  
Writing at 0x002f4f68... (100 %)  
Wrote 152144 bytes (98789 compressed) at 0x002d0000 in 2.4 seconds (effective 497.6 kbit/s)...  
Hash of data verified.  
Leaving...  
Adafruit Feather ESP32-S2 TFT, Enabled, Disabled, Enabled, Default 4MB with spiffs (1.2MB APP / 1.5MB SPIFFS), 240MHz (WiFi), QIO, 80MHz, 4MB (32Mb), 921600, None on /dev/cu.usbmodem1444201
```

Often times you will get a warning like this, which is kind of vague:

No device found on COM66 (or whatever port is selected)  
An error occurred while uploading the sketch

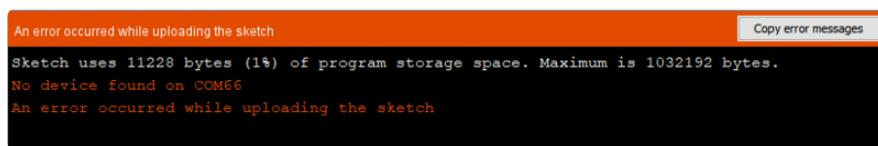

This could be a few things.

First up, check again that you have the correct board selected! Many electronics boards have very similar names or look, and often times folks grab a board different from what they thought.

If you're positive the right board is selected, we recommend the next step is to put the board into manual bootloading mode.


## Native USB and manual bootloading

Historically, microcontroller boards contained two chips: the main micro chip (say, ATmega328 or ESP8266 or ESP32) and a separate chip for USB interface that would be used for bootloading (a CH430, FT232, CP210x, etc). With these older designs, the microcontroller is put into a bootloading state for uploading code by the separate chip. It allows for easier uploading but is more expensive as two chips are needed, and also the microcontroller can't act like a keyboard or disk drive.

Modern chips often have 'native' USB - that means that there is no separate chip for USB interface. It's all in one! Great for cost savings, simplicity of design, reduced size and more control. However, it means the chip must be self-aware enough to be able to put itself into bootloader/upload mode on its own. That's fine 99% of the time but is very likely you will at some point get the board into an odd state that makes it too confused to bootloader.

A lot of beginners have a little freakout the first time this happens, they think the board is ruined or 'bricked' - it's almost certainly not, it is just crashed and/or confused. You may need to perform a little trick to get the board back into a good state, at which point you won't need to manually bootloader again.

Before continuing we really really suggest turning on Verbose Upload messages, it will help in this process because you will be able to see what the IDE is trying to do. It's a checkbox in the Preferences menu.

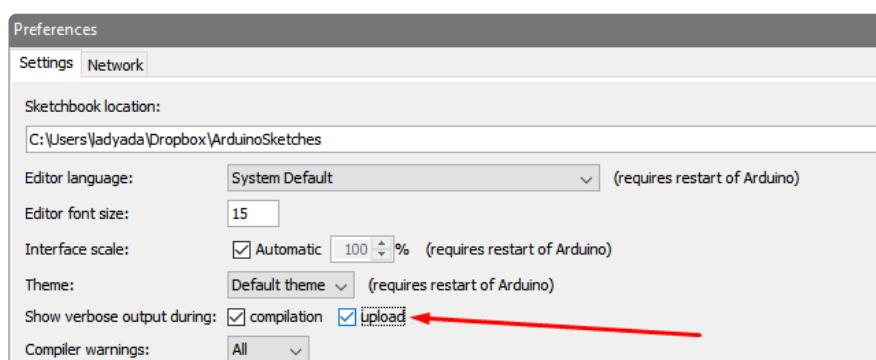


## Enter Manual Bootload Mode

OK now you know it's probably time to try manual bootloading. No problem! Here is how you do that for this board:

Hold down the BOOT button, and while continuing to hold it, press the Reset button. Keep holding BOOT for a few seconds! The ROM bootloader does not show a drive, so nothing will happen when it is successful!

Once you are in manual bootloader mode, go to the Tools menu, and make sure you have selected the bootloader serial port. It is almost certain that the serial port has changed now that the bootloader is enabled

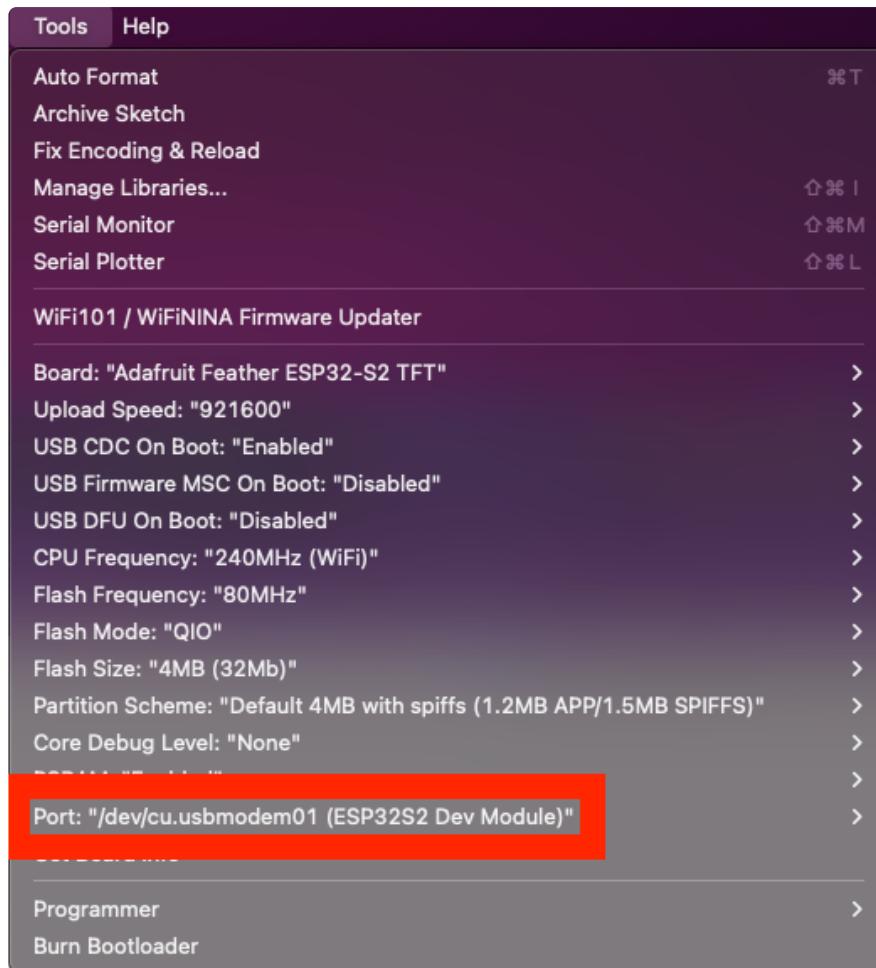

Now you can try uploading again!



Did you remember to select the new Port in the Tools menu since the bootloader port has changed?

This time, you should have success!

After uploading this way, be sure to click the reset button - it sort of makes sure that the board got a good reset and will come back to life nicely.

After uploading with Manual Bootloader - don't forget to re-select the old Port again

It's also a good idea to try to re-upload the sketch again now that you've performed a manual bootload to get the chip into a good state. It should perform an auto-reset the second time, so you don't have to manually bootloader again

## Finally, a Blink!

OK it was a journey but now we're here and you can enjoy your blinking LED. Next up, try to change the delay between blinks and re-upload. It's a good way to make sure your upload process is smooth and practiced.

---

## I2C Scan Test

'A lot of sensors, displays, and devices can connect over I2C. I2C is a 2-wire 'bus' that allows multiple devices to all connect on one set of pins so it's very convenient for wiring!

When using your board, you'll probably want to connect up I2C devices, and it can be a little tricky the first time. The best way to debug I2C is go through a checklist and then perform an I2C scan

## Common I2C Connectivity Issues

- Have you connected four wires (at a minimum) for each I2C device? Power the device with whatever is the logic level of your microcontroller board (probably 3.3V), then a ground wire, and a SCL clock wire, and a SDA data wire.
- If you're using a STEMMA QT board - check if the power LED is lit. It's usually a green LED to the left side of the board.
- Does the STEMMA QT/I2C port have switchable power or pullups? To reduce power, some boards have the ability to cut power to I2C devices or the pullup resistors. Check the documentation if you have to do something special to turn on the power or pullups.
- If you are using a DIY I2C device, do you have pullup resistors? Many boards do not have pullup resistors built in and they are required! We suggest any common 2.2K to 10K resistors. You'll need two: one connects from SDA to positive power, and SCL to positive power. Again, positive power (a.k.a VCC, VDD or V+) is often 3.3V
- Do you have an address collision? You can only have one board per address. So you cannot, say, connect two AHT20's to one I2C port because they have the

same address and will interfere. Check the sensor or documentation for the address. Sometimes there are ways to adjust the address.

- Does your board have multiple I2C ports? Historically, boards only came with one. But nowadays you can have two or even three! This can help solve the "hey but what if I want two devices with the same address" problem: just put one on each bus.
- Are you hot-plugging devices? I2C does not support dynamic re-connection, you cannot connect and disconnect sensors as you please. They should all be connected on boot and not change. ([Only exception is if you're using a hot-plug assistant but that'll cost ya \(https://adafru.it/XBY\)](https://adafru.it/XBY))
- Are you keeping the total bus length reasonable? I2C was designed for maybe 6" max length. We like to push that with plug-n-play cables but really please keep them as short as possible! ([Only exception is if you're using an active bus extender \(https://adafru.it/XBZ\)](https://adafru.it/XBZ)).


The TFT Feather has 10k pullups on I2C pins SCL and SDA. I2C shared by the broken out pins and the STEMMA QT connector.

There is a lipo battery monitor, LC709203F, on the I2C bus. There is a space for a BME280.


## Perform an I2C scan!

### Install TestBed Library


To scan I2C, the Adafruit TestBed library is used. This library and example just makes the scan a little easier to run because it takes care of some of the basics. You will need to add support by installing the library. Good news: it is very easy to do it. Go to the Arduino Library Manager.

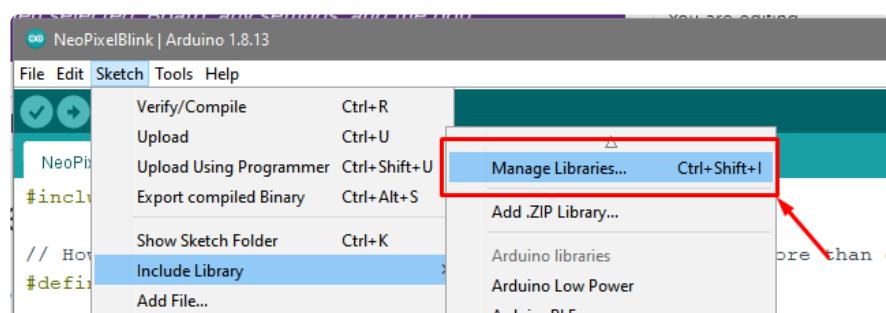

Search for TestBed and install the Adafruit TestBed library

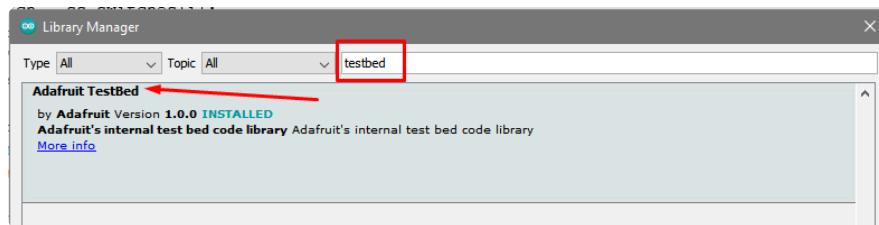

Now open up the I2C Scan example

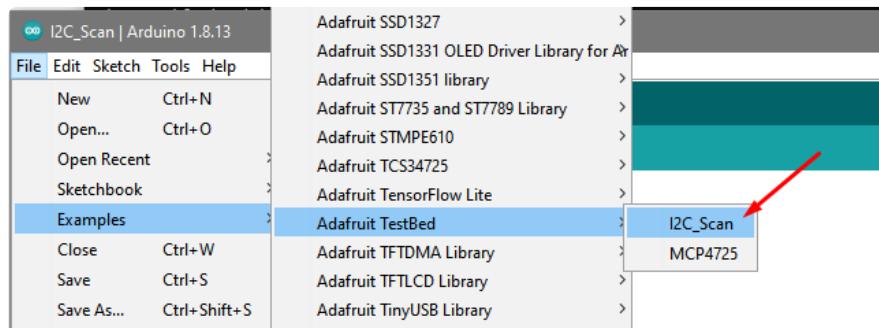

```
#include <Adafruit_TestBed.h>
extern Adafruit_TestBed TB;

#define DEFAULT_I2C_PORT &Wire

// Some boards have TWO I2C ports, how nifty. We should scan both
#if defined(ARDUINO_ADAFRUIT_KB2040_RP2040) \
|| defined(ARDUINO_ADAFRUIT_ITSYBITSY_RP2040) \
|| defined(ARDUINO_ADAFRUIT_QTPY_RP2040) \
|| defined(ARDUINO_ADAFRUIT_FEATHER_RP2040) \
|| defined(ARDUINO_ADAFRUIT_QTPY_ESP32S2) \
|| defined(ARDUINO_ADAFRUIT_QTPY_ESP32S3_NOPSRAM) \
|| defined(ARDUINO_ADAFRUIT_QTPY_ESP32_PICO) \
|| defined(ARDUINO_SAM_DUE)
#define SECONDARY_I2C_PORT &Wire1
#endif

void setup() {
    Serial.begin(115200);

    // Wait for Serial port to open
    while (!Serial) {
        delay(10);
    }
    delay(500);
    Serial.println("Adafruit I2C Scanner");

#if defined(ARDUINO_ADAFRUIT_QTPY_ESP32S2) || \
defined(ARDUINO_ADAFRUIT_QTPY_ESP32S3_NOPSRAM) || \
defined(ARDUINO_ADAFRUIT_QTPY_ESP32_PICO)
    // ESP32 is kinda odd in that secondary ports must be manually
    // assigned their pins with setPins()!
    Wire1.setPins(SDA1, SCL1);
#endif

#if defined(ARDUINO_ADAFRUIT_FEATHER_ESP32S2)
    // turn on the I2C power by setting pin to opposite of 'rest state'
    pinMode(PIN_I2C_POWER, INPUT);
    delay(1);
    bool polarity = digitalRead(PIN_I2C_POWER);
    pinMode(PIN_I2C_POWER, OUTPUT);
    digitalWrite(PIN_I2C_POWER, !polarity);

```

```

#endif

#if defined(ARDUINO_ADAFRUIT_FEATHER_ESP32S2_TFT)
  pinMode(TFT_I2C_POWER, OUTPUT);
  digitalWrite(TFT_I2C_POWER, HIGH);
#endif

#if defined(ADAFRUIT_FEATHER_ESP32_V2)
  // Turn on the I2C power by pulling pin HIGH.
  pinMode(NEOPixel_I2C_POWER, OUTPUT);
  digitalWrite(NEOPixel_I2C_POWER, HIGH);
#endif
}

void loop() {
  Serial.println("");
  Serial.println("");

  Serial.print("Default port (Wire) ");
  TB.theWire = DEFAULT_I2C_PORT;
  TB.printI2CBusScan();

#if defined(SECONDARY_I2C_PORT)
  Serial.print("Secondary port (Wire1) ");
  TB.theWire = SECONDARY_I2C_PORT;
  TB.printI2CBusScan();
#endif


  delay(3000); // wait 3 seconds
}

```

## Wire up I2C device

While the examples here will be using the [Adafruit MCP9808](https://adafru.it/Trb) (<https://adafru.it/Trb>), a high accuracy temperature sensor, the overall process is the same for just about any I2C sensor or device.

The first thing you'll want to do is get the sensor connected so your board has I2C to talk to.

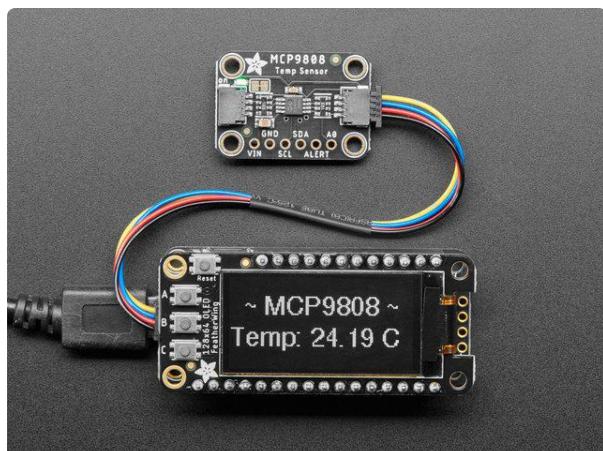


### [Adafruit MCP9808 High Accuracy I2C Temperature Sensor Breakout](https://www.adafruit.com/product/5027)

The MCP9808 digital temperature sensor is one of the more accurate/precise we've ever seen, with a typical accuracy of  $\pm 0.25^\circ\text{C}$  over the sensor's  $-40^\circ\text{C}$  to...

<https://www.adafruit.com/product/5027>

## Wiring the MCP9808

The MCP9808 comes with a STEMMA QT connector, which makes wiring it up quite simple and solder-free.

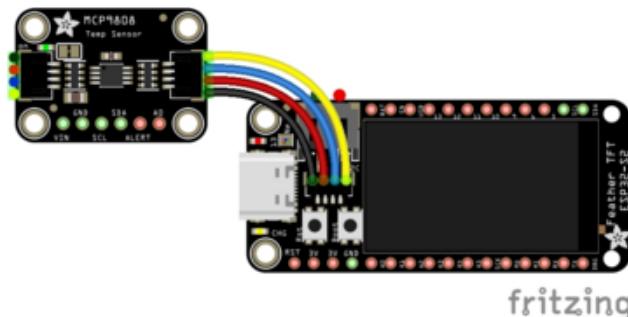

Using a [STEMMA QT cable](https://adafru.it/Tff) (<https://adafru.it/Tff>), connect the STEMMA QT connector on the MCP9808 to the STEMMA QT connector on the Feather.

Now upload the scanning sketch to your microcontroller and open the serial port to see the output. You should see something like this:

```
Adafruit I2C Scanner


Default port I2C scan: 0x0, 0xB, 0x18,
Default port I2C scan: 0x0, 0xB, 0x18,
Default port I2C scan: 0x0, 0xB, 0x18,
```

## I2C: On-Board LC709203 Battery Monitor

Your microcontroller board comes with an LC709203 lithium ion polymer (lipoly) battery monitor built right onto the board. The LC709203 is available over I2C.

The sensor comes with its own Adafruit CircuitPython library that makes it simple to write code to read data from it. This example will be using, among other things, the [Adafruit LC709203F](https://adafru.it/Nd-) (<https://adafru.it/Nd->) library.


The example simply reads data from the sensor and prints it to the serial console. It is designed to show you how to get data from the sensor.

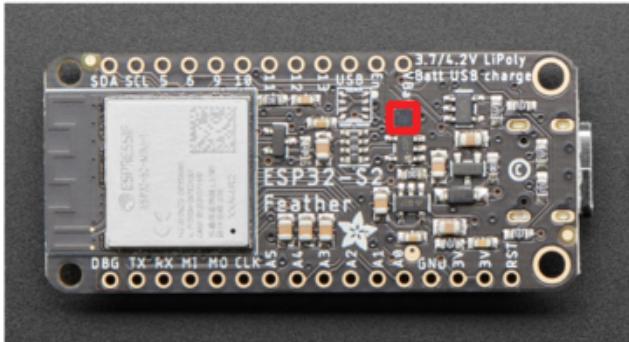


The LC709203 battery monitor (highlighted in red) is located on the bottom of the board near the VBAT pin label. Its I2C address is 0x0B. (0xb, which is returned by I2C scan, is the same as 0x0B, which simply has leading zeros.)

## Arduino Library Installation


You can install the necessary libraries from the Library Manager. To open, click Sketch > Include Library > Manage Libraries...

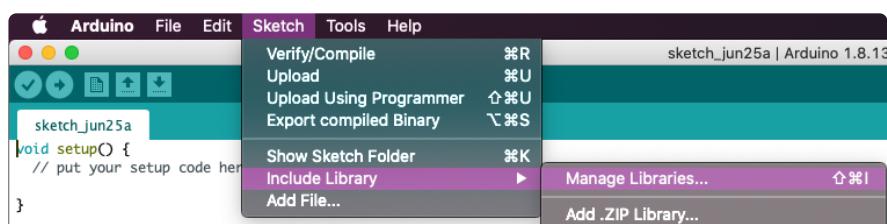

Search for LC709203F, and install the Adafruit LC709203F library.

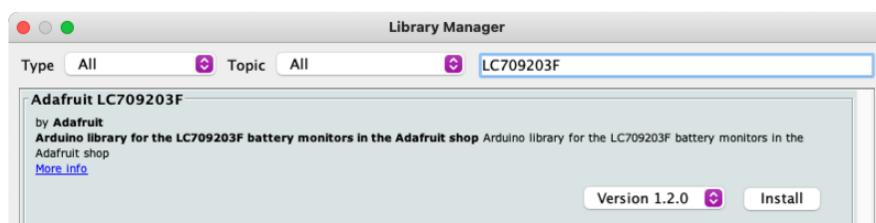

When asked about installing dependencies, click Install all.

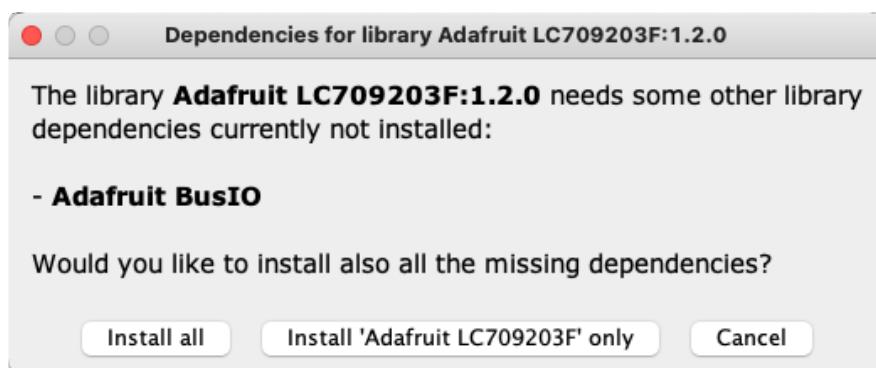

## LC709203 Simple Data Example

Click File > Examples > Adafruit LC709203F > LC709203F\_demo to open the example.

```
#include "Adafruit_LC709203F.h"

Adafruit_LC709203F lc;

void setup() {
    Serial.begin(115200);
    delay(10);
    Serial.println("\nAdafruit LC709203F demo");

    // For the Feather ESP32-S2, we need to enable I2C power first!
    // this section can be deleted for other boards
#if defined(ARDUINO_ADAFRUIT_FEATHER_ESP32S2)
    // turn on the I2C power by setting pin to opposite of 'rest state'
    pinMode(PIN_I2C_POWER, INPUT);
    delay(1);
    bool polarity = digitalRead(PIN_I2C_POWER);
    pinMode(PIN_I2C_POWER, OUTPUT);
    digitalWrite(PIN_I2C_POWER, !polarity);
#endif

    if (!lc.begin()) {
        Serial.println(F("Couldnt find Adafruit LC709203F?\nMake sure a battery is
plugged in!"));
        while (1) delay(10);
    }
    Serial.println(F("Found LC709203F"));
    Serial.print("Version: 0x"); Serial.println(lc.getICversion(), HEX);

    lc.setThermistorB(3950);
    Serial.print("Thermistor B = "); Serial.println(lc.getThermistorB());

    lc.setPackSize(LC709203F_AP_500MAH);

    lc.setAlarmVoltage(3.8);
}

void loop() {
    Serial.print("Batt Voltage: "); Serial.println(lc.cellVoltage(), 3);
    Serial.print("Batt Percent: "); Serial.println(lc.cellPercent(), 1);
    Serial.print("Batt Temp: "); Serial.println(lc.getCellTemperature(), 1);

    delay(2000); // dont query too often!
}
```

After opening the LC709203F\_demo file, upload it to your microcontroller. Open the Serial Monitor at 115200 baud. You should see the following as the sketch starts up.



Once the sketch begins running, you should see something like the following.



```
/dev/cu.usbmodem11444201
Send
Batt Voltage: 4.173
Batt Percent: 100.0
Batt Temp: 6.5
Batt Voltage: 4.173
Batt Percent: 100.0
Batt Temp: 6.5
```


That's all there is to reading battery data from the LC709203 using Arduino!

## Built-In TFT

Your microcontroller board comes with a lovely TFT display built right in. The Arduino ST7735 and ST7789 Library enables you to use the TFT on your board with Arduino. This page shows you how to install the necessary libraries, and provides a graphics test example.

## Arduino Library Installation


You'll need to install the ST7735 and ST7789 library to compile and run the following example. Open the Arduino IDE and then open the Library manager.

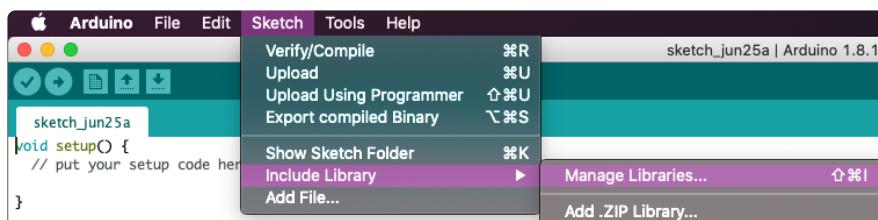

Click the Manage Libraries ... menu item, search for ST7789, and select the Adafruit ST7735 and ST7789 Library:



When asked to install any dependencies, click Install all.

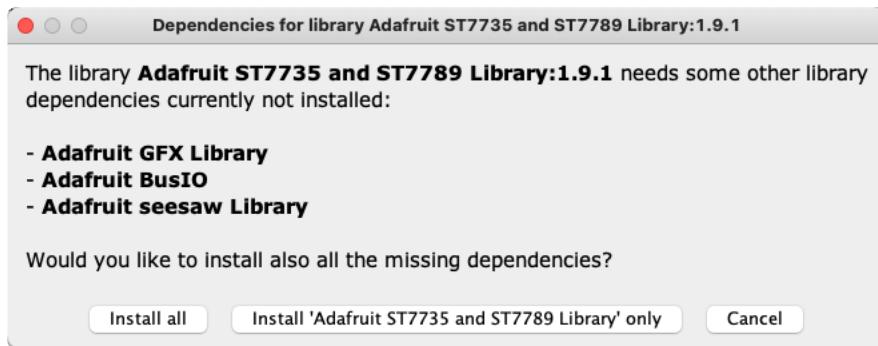

## Graphics Test Example Code

The next thing you'll want to do is load the example code onto your board.

You can find the example through the Arduino IDE by clicking File > Adafruit ST7735 and ST7789 Library > graphicstest\_feather\_esp32s2\_tft.

```
*****
This is a library for several Adafruit displays based on ST77* drivers.

Works with the Adafruit ESP32-S2 TFT Feather
----> http://www.adafruit.com/products/5300

Check out the links above for our tutorials and wiring diagrams.

Adafruit invests time and resources providing this open source code,
please support Adafruit and open-source hardware by purchasing
products from Adafruit!

Written by Limor Fried/Ladyada for Adafruit Industries.
MIT license, all text above must be included in any redistribution
*****
```

```
#include <Adafruit_GFX.h>    // Core graphics library
#include <Adafruit_ST7789.h> // Hardware-specific library for ST7789
#include <SPI.h>

// Use dedicated hardware SPI pins
Adafruit_ST7789 tft = Adafruit_ST7789(TFT_CS, TFT_DC, TFT_RST);

float p = 3.1415926;

void setup(void) {
  Serial.begin(9600);
  Serial.print(F("Hello! Feather TFT Test"));

  // turn on backlite
  pinMode(TFT_BACKLITE, OUTPUT);
  digitalWrite(TFT_BACKLITE, HIGH);

  // turn on the TFT / I2C power supply
  pinMode(TFT_I2C_POWER, OUTPUT);
  digitalWrite(TFT_I2C_POWER, HIGH);
  delay(10);

  // initialize TFT
  tft.init(135, 240); // Init ST7789 240x135
  tft.setRotation(3);
  tft.fillScreen(ST77XX_BLACK);
```

```

Serial.println(F("Initialized"));

uint16_t time = millis();
tft.fillRect(ST77XX_BLACK);
time = millis() - time;

Serial.println(time, DEC);
delay(500);

// large block of text
tft.fillRect(ST77XX_BLACK);
testdrawtext(
    "Lorem ipsum dolor sit amet, consectetur adipiscing elit. Curabitur "
    "adipiscing ante sed nibh tincidunt feugiat. Maecenas enim massa, "
    "fringilla sed malesuada et, malesuada sit amet turpis. Sed porttitor "
    "neque ut ante pretium vitae malesuada nunc bibendum. Nullam aliquet "
    "ultrices massa eu hendrerit. Ut sed nisi lorem. In vestibulum purus a "
    "tortor imperdiet posuere. ",
    ST77XX_WHITE);
delay(1000);

// tft print function!
tftPrintTest();
delay(4000);

// a single pixel
tft.drawPixel(tft.width() / 2, tft.height() / 2, ST77XX_GREEN);
delay(500);

// line draw test
testlines(ST77XX_YELLOW);
delay(500);

// optimized lines
testfastlines(ST77XX_RED, ST77XX_BLUE);
delay(500);

testdrawrects(ST77XX_GREEN);
delay(500);

testfillrects(ST77XX_YELLOW, ST77XX_MAGENTA);
delay(500);

tft.fillRect(ST77XX_BLACK);
testfillcircles(10, ST77XX_BLUE);
testdrawcircles(10, ST77XX_WHITE);
delay(500);

testroundrects();
delay(500);

testtriangles();
delay(500);

mediabuttons();
delay(500);

Serial.println("done");
delay(1000);
}

void loop() {
    tft.invertDisplay(true);
    delay(500);
    tft.invertDisplay(false);
    delay(500);
}

```

```

void testlines(uint16_t color) {
    tft.fillRect(ST77XX_BLACK);
    for (int16_t x = 0; x < tft.width(); x += 6) {
        tft.drawLine(0, 0, x, tft.height() - 1, color);
        delay(0);
    }
    for (int16_t y = 0; y < tft.height(); y += 6) {
        tft.drawLine(0, 0, tft.width() - 1, y, color);
        delay(0);
    }

    tft.fillRect(ST77XX_BLACK);
    for (int16_t x = 0; x < tft.width(); x += 6) {
        tft.drawLine(tft.width() - 1, 0, x, tft.height() - 1, color);
        delay(0);
    }
    for (int16_t y = 0; y < tft.height(); y += 6) {
        tft.drawLine(tft.width() - 1, 0, 0, y, color);
        delay(0);
    }

    tft.fillRect(ST77XX_BLACK);
    for (int16_t x = 0; x < tft.width(); x += 6) {
        tft.drawLine(0, tft.height() - 1, x, 0, color);
        delay(0);
    }
    for (int16_t y = 0; y < tft.height(); y += 6) {
        tft.drawLine(0, tft.height() - 1, tft.width() - 1, y, color);
        delay(0);
    }

    tft.fillRect(ST77XX_BLACK);
    for (int16_t x = 0; x < tft.width(); x += 6) {
        tft.drawLine(tft.width() - 1, tft.height() - 1, x, 0, color);
        delay(0);
    }
    for (int16_t y = 0; y < tft.height(); y += 6) {
        tft.drawLine(tft.width() - 1, tft.height() - 1, 0, y, color);
        delay(0);
    }
}

void testdrawtext(char *text, uint16_t color) {
    tft.setCursor(0, 0);
    tft.setTextColor(color);
    tft.setTextWrap(true);
    tft.print(text);
}

void testfastlines(uint16_t color1, uint16_t color2) {
    tft.fillRect(ST77XX_BLACK);
    for (int16_t y = 0; y < tft.height(); y += 5) {
        tft.drawFastHLine(0, y, tft.width(), color1);
    }
    for (int16_t x = 0; x < tft.width(); x += 5) {
        tft.drawFastVLine(x, 0, tft.height(), color2);
    }
}

void testdrawrects(uint16_t color) {
    tft.fillRect(ST77XX_BLACK);
    for (int16_t x = 0; x < tft.width(); x += 6) {
        tft.drawRect(tft.width() / 2 - x / 2, tft.height() / 2 - x / 2, x, x,
                    color);
    }
}

void testfillrects(uint16_t color1, uint16_t color2) {
    tft.fillRect(ST77XX_BLACK);
}

```

```

    for (int16_t x = tft.width() - 1; x > 6; x -= 6) {
        tft.fillRect(tft.width() / 2 - x / 2, tft.height() / 2 - x / 2, x, x,
                     color1);
        tft.drawRect(tft.width() / 2 - x / 2, tft.height() / 2 - x / 2, x, x,
                     color2);
    }
}

void testfillcircles(uint8_t radius, uint16_t color) {
    for (int16_t x = radius; x < tft.width(); x += radius * 2) {
        for (int16_t y = radius; y < tft.height(); y += radius * 2) {
            tft.fillCircle(x, y, radius, color);
        }
    }
}

void testdrawcircles(uint8_t radius, uint16_t color) {
    for (int16_t x = 0; x < tft.width() + radius; x += radius * 2) {
        for (int16_t y = 0; y < tft.height() + radius; y += radius * 2) {
            tft.drawCircle(x, y, radius, color);
        }
    }
}

void testtriangles() {
    tft.fillRect(ST77XX_BLACK);
    uint16_t color = 0xF800;
    int t;
    int w = tft.width() / 2;
    int x = tft.height() - 1;
    int y = 0;
    int z = tft.width();
    for (t = 0; t <= 15; t++) {
        tft.drawTriangle(w, y, y, x, z, x, color);
        x -= 4;
        y += 4;
        z -= 4;
        color += 100;
    }
}

void testroundrects() {
    tft.fillRect(ST77XX_BLACK);
    uint16_t color = 100;
    int i;
    int t;
    for (t = 0; t <= 4; t += 1) {
        int x = 0;
        int y = 0;
        int w = tft.width() - 2;
        int h = tft.height() - 2;
        for (i = 0; i <= 16; i += 1) {
            tft.drawRoundRect(x, y, w, h, 5, color);
            x += 2;
            y += 3;
            w -= 4;
            h -= 6;
            color += 1100;
        }
        color += 100;
    }
}

void tftPrintTest() {
    tft.setTextWrap(false);
    tft.fillRect(ST77XX_BLACK);
    tft.setCursor(0, 30);
    tft.setTextColor(ST77XX_RED);
    tft.setTextSize(1);
}

```

```

tft.println("Hello World!");
tft.setTextColor(ST77XX_YELLOW);
tft.setTextSize(2);
tft.println("Hello World!");
tft.setTextColor(ST77XX_GREEN);
tft.setTextSize(3);
tft.println("Hello World!");
tft.setTextColor(ST77XX_BLUE);
tft.setTextSize(4);
tft.print(1234.567);
delay(1500);
tft.setCursor(0, 0);
tft.fillScreen(ST77XX_BLACK);
tft.setTextColor(ST77XX_WHITE);
tft.setTextSize(0);
tft.println("Hello World!");
tft.setTextSize(1);
tft.setTextColor(ST77XX_GREEN);
tft.print(p, 6);
tft.println(" Want pi?");
tft.println(" ");
tft.print(8675309, HEX); // print 8,675,309 out in HEX!
tft.println(" Print HEX!");
tft.println(" ");
tft.setTextColor(ST77XX_WHITE);
tft.println("Sketch has been");
tft.println("running for: ");
tft.setTextColor(ST77XX_MAGENTA);
tft.print(millis() / 1000);
tft.setTextColor(ST77XX_WHITE);
tft.print(" seconds.");
}

void mediabuttons() {
    // play
    tft.fillScreen(ST77XX_BLACK);
    tft.fillRoundRect(25, 5, 78, 60, 8, ST77XX_WHITE);
    tft.fillTriangle(42, 12, 42, 60, 90, 40, ST77XX_RED);
    delay(500);
    // pause
    tft.fillRoundRect(25, 70, 78, 60, 8, ST77XX_WHITE);
    tft.fillRoundRect(39, 78, 20, 45, 5, ST77XX_GREEN);
    tft.fillRoundRect(69, 78, 20, 45, 5, ST77XX_GREEN);
    delay(500);
    // play color
    tft.fillTriangle(42, 12, 42, 60, 90, 40, ST77XX_BLUE);
    delay(50);
    // pause color
    tft.fillRoundRect(39, 78, 20, 45, 5, ST77XX_RED);
    tft.fillRoundRect(69, 78, 20, 45, 5, ST77XX_RED);
    // play color
    tft.fillTriangle(42, 12, 42, 60, 90, 40, ST77XX_GREEN);
}

```

The initial setup in this example is specific to your board.

First, create an instance of the TFT, passing in the appropriate pins.

```
Adafruit_ST7789 tft = Adafruit_ST7789(TFT_CS, TFT_DC, TFT_RST);
```

Next, you'll turn on the backlight.

```
pinMode(TFT_BACKLITE, OUTPUT);
digitalWrite(TFT_BACKLITE, HIGH);
```

Then, you'll turn on the power to the TFT.

```
pinMode(TFT_I2C_POWER, OUTPUT);
digitalWrite(TFT_I2C_POWER, HIGH);
delay(10);
```

Finally, you'll initialise the display with the width and height in pixels. Then, you'll set the rotation.


```
tft.init(135, 240);
tft.setRotation(3);
```

Now, you're ready to display all sorts of text and graphics on your TFT. That's all there is to using the built in TFT on your board with Arduino!

For more details about this example, check out [this guide \(https://adafru.it/zra\)](https://adafru.it/zra).


## WiFi Test

Thankfully if you have ESP32 sketches, they'll 'just work' with variations of ESP32. You can find a wide range of examples in the File->Examples->Examples for Adafruit Metro ESP32-S2 subheading (the name of the board may vary so it could be "Examples for Adafruit Feather ESP32 V2" etc)

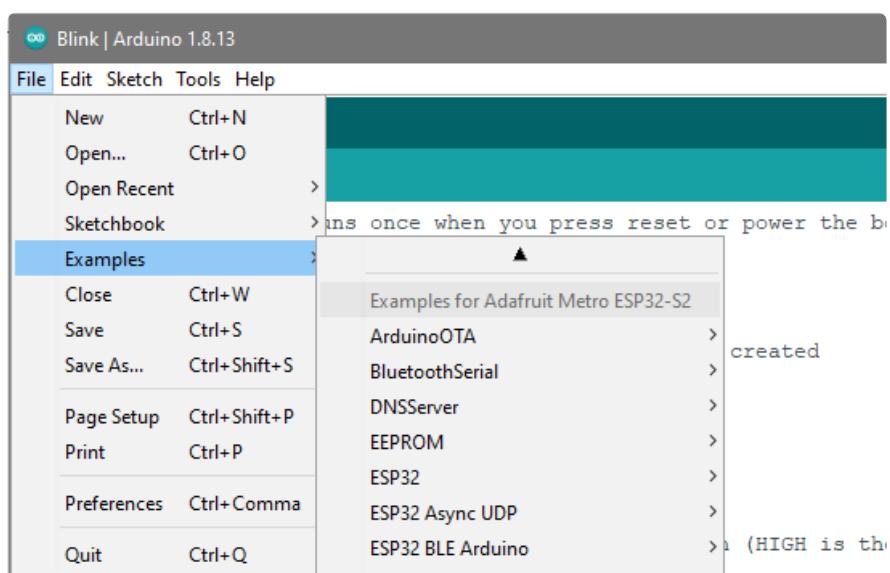

Let's start by scanning the local networks.

Load up the WiFiScan example under Examples->Examples for YOUR BOARDNAME->WiFi->WiFiScan

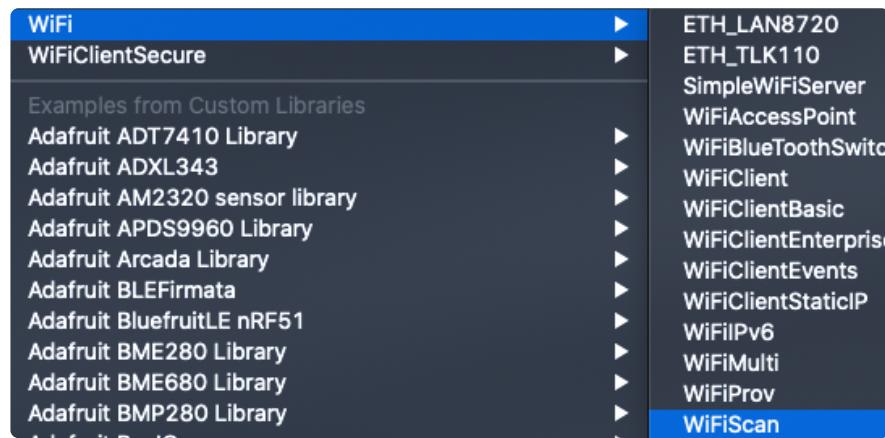

And upload this example to your board. The ESP32 should scan and find WiFi networks around you.

For ESP32, open the serial monitor, to see the scan begin.

For ESP32-S2, -S3 and -C3, don't forget you have to click Reset after uploading through the ROM bootloader. Then select the new USB Serial port created by the ESP32. It will take a few seconds for the board to complete the scan.

The screenshot shows the Arduino Serial Monitor window titled 'COM37'. The text area displays the following log output:

```
18:16:20.283 -> scan start
18:16:25.389 -> scan done
18:16:25.389 -> 12 networks found
18:16:25.389 -> 1: adafruit (-54)*
18:16:25.436 -> 2: MySpectrumWiFi73-2G (-56)*
18:16:25.436 -> 3: Sally (-57)*
18:16:25.436 -> 4: MySpectrumWiFi7C-2G (-58)*
18:16:25.436 -> 5: Fios-K57GI (-68)*
18:16:25.436 -> 6: linksys_SES_2868 (-76)*
18:16:25.482 -> 7: patricks Network (-76)*
18:16:25.482 -> 8: eufy RoboVac 30C-FA66 (-79)
18:16:25.482 -> 9: linksys_SES_2868 (-81)*
18:16:25.482 -> 10: VVCBR (-83)*
18:16:25.528 -> 11: Fios-K57GI (-83)*
18:16:25.528 -> 12: Patrick (-83)*
18:16:25.528 ->
18:16:30.520 -> scan start
```

At the bottom of the window, there are several status indicators and settings: 'Autoscroll' (unchecked), 'Show timestamp' (checked), 'Both NL & CR' (selected dropdown), '115200 baud' (selected dropdown), and 'Clear output' (button).

If you can not scan any networks, check your power supply. You need a solid power supply in order for the ESP32 to not brown out. A skinny USB cable or drained battery can cause issues.

# WiFi Connection Test

Now that you can scan networks around you, its time to connect to the Internet!

Copy the example below and paste it into the Arduino IDE:

```
// SPDX-FileCopyrightText: 2020 Brent Rubell for Adafruit Industries
// SPDX-License-Identifier: MIT

/*
  Web client

This sketch connects to a website (wifitest.adafruit.com/testwifi/index.html)
using the WiFi module.

This example is written for a network using WPA encryption. For
WEP or WPA, change the Wifi.begin() call accordingly.

This example is written for a network using WPA encryption. For
WEP or WPA, change the Wifi.begin() call accordingly.

created 13 July 2010
by dlf (Metodo2 srl)
modified 31 May 2012
by Tom Igoe
*/

#include <WiFi.h>

// Enter your WiFi SSID and password
char ssid[] = "YOUR_SSID";          // your network SSID (name)
char pass[] = "YOUR_SSID_PASSWORD";  // your network password (use for WPA, or
use as key for WEP)
int keyIndex = 0;                   // your network key Index number (needed
only for WEP)

int status = WL_IDLE_STATUS;
// if you don't want to use DNS (and reduce your sketch size)
// use the numeric IP instead of the name for the server:
//IPAddress server(74,125,232,128); // numeric IP for Google (no DNS)

char server[] = "wifitest.adafruit.com";    // name address for adafruit test
char path[]   = "/testwifi/index.html";

// Initialize the Ethernet client library
// with the IP address and port of the server
// that you want to connect to (port 80 is default for HTTP):
WiFiClient client;

void setup() {
  //Initialize serial and wait for port to open:
  Serial.begin(115200);
  while (!Serial) {
    ; // wait for serial port to connect. Needed for native USB port only
  }

  // attempt to connect to WiFi network:
  Serial.print("Attempting to connect to SSID: ");
  Serial.println(ssid);

  WiFi.begin(ssid, pass);
}
```

```

while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
}

Serial.println("");
Serial.println("Connected to WiFi");
printWifiStatus();

Serial.println("\nStarting connection to server...");
// if you get a connection, report back via serial:
if (client.connect(server, 80)) {
    Serial.println("connected to server");
    // Make a HTTP request:
    client.print("GET "); client.print(path); client.println(" HTTP/1.1");
    client.print("Host: "); client.println(server);
    client.println("Connection: close");
    client.println();
}
}

void loop() {
    // if there are incoming bytes available
    // from the server, read them and print them:
    while (client.available()) {
        char c = client.read();
        Serial.write(c);
    }

    // if the server's disconnected, stop the client:
    if (!client.connected()) {
        Serial.println();
        Serial.println("disconnecting from server.");
        client.stop();

        // do nothing forevermore:
        while (true) {
            delay(100);
        }
    }
}

void printWifiStatus() {
    // print the SSID of the network you're attached to:
    Serial.print("SSID: ");
    Serial.println(WiFi.SSID());

    // print your board's IP address:
    IPAddress ip = WiFi.localIP();
    Serial.print("IP Address: ");
    Serial.println(ip);

    // print the received signal strength:
    long rssi = WiFi.RSSI();
    Serial.print("signal strength (RSSI):");
    Serial.print(rssi);
    Serial.println(" dBm");
}

```

NOTE: You must change the **SECRET\_SSID** and **SECRET\_PASS** in the example code to your WiFi SSID and password before uploading this to your board.

```
// Enter your WiFi SSID and password
char ssid[] = "YOUR_SSID";           // your network SSID (name)
char pass[] = "YOUR_SSID_PASSWORD";   // your network password (use for WPA, or use as key for WEP)
int keyIndex = 0;                     // your network key Index number (needed only for WEP)
```

After you've set it correctly, upload and check the serial monitor. You should see the following. If not, go back, check wiring, power and your SSID/password

```
Attempting to connect to SSID: Transit
.....
Connected to WiFi
SSID: Transit
IP Address: 192.168.1.182
signal strength (RSSI):-57 dBm

Starting connection to server...
connected to server
HTTP/1.1 200 OK
Server: nginx/1.10.3 (Ubuntu)
Date: Wed, 11 Nov 2020 20:51:30 GMT
Content-Type: text/html
Content-Length: 70
Last-Modified: Thu, 16 May 2019 18:21:16 GMT
Connection: close
ETag: "5cddaa1c-46"
Accept-Ranges: bytes

This is a test of Adafruit WiFi!
If you can read this, its working :)

disconnecting from server.
```

## Secure Connection Example

Many servers today do not allow non-SSL connectivity. Lucky for you the ESP32 has a great TLS/SSL stack so you can have that all taken care of for you. Here's an example of a using a secure WiFi connection to connect to the Twitter API.

Copy and paste it into the Arduino IDE:

```
// SPDX-FileCopyrightText: 2015 Arturo Guadalupi
// SPDX-FileCopyrightText: 2020 Brent Rubell for Adafruit Industries
// 
// SPDX-License-Identifier: MIT

/*
This example creates a client object that connects and transfers
data using always SSL.
```

It is compatible with the methods normally related to plain connections, like client.connect(host, port).

Written by Arturo Guadalupi  
last revision November 2015

```
*/  
  
#include <WiFiClientSecure.h>  
  
// Enter your WiFi SSID and password  
char ssid[] = "YOUR_SSID"; // your network SSID (name)  
char pass[] = "YOUR_SSID_PASSWORD"; // your network password (use for WPA, or  
use as key for WEP)  
int keyIndex = 0; // your network key Index number (needed  
only for WEP)  
  
int status = WL_IDLE_STATUS;  
// if you don't want to use DNS (and reduce your sketch size)  
// use the numeric IP instead of the name for the server:  
//IPAddress server(74,125,232,128); // numeric IP for Google (no DNS)  
  
#define SERVER "cdn.syndication.twimg.com"  
#define PATH "/widgets/followbutton/info.json?screen_names=adafruit"  
  
// Initialize the SSL client library  
// with the IP address and port of the server  
// that you want to connect to (port 443 is default for HTTPS):  
WiFiClientSecure client;  
  
void setup() {  
    //Initialize serial and wait for port to open:  
    Serial.begin(115200);  
    while (!Serial) {  
        ; // wait for serial port to connect. Needed for native USB port only  
    }  
  
    // attempt to connect to Wifi network:  
    Serial.print("Attempting to connect to SSID: ");  
    Serial.println(ssid);  
  
    WiFi.begin(ssid, pass);  
    while (WiFi.status() != WL_CONNECTED) {  
        delay(500);  
        Serial.print(".");  
    }  
  
    Serial.println("");  
    Serial.println("Connected to WiFi");  
    printWifiStatus();  
  
    client.setInsecure(); // don't use a root cert  
  
    Serial.println("\nStarting connection to server...");  
    // if you get a connection, report back via serial:  
    if (client.connect(SERVER, 443)) {  
        Serial.println("connected to server");  
        // Make a HTTP request:  
        client.println("GET " PATH " HTTP/1.1");  
        client.println("Host: " SERVER);  
        client.println("Connection: close");  
        client.println();  
    }  
}  
  
uint32_t bytes = 0;  
  
void loop() {
```

```

// if there are incoming bytes available
// from the server, read them and print them:
while (client.available()) {
    char c = client.read();
    Serial.write(c);
    bytes++;
}

// if the server's disconnected, stop the client:
if (!client.connected()) {
    Serial.println();
    Serial.println("disconnecting from server.");
    client.stop();
    Serial.print("Read "); Serial.print(bytes); Serial.println(" bytes");

    // do nothing forevermore:
    while (true);
}
}

void printWifiStatus() {
    // print the SSID of the network you're attached to:
    Serial.print("SSID: ");
    Serial.println(WiFi.SSID());

    // print your board's IP address:
    IPAddress ip = WiFi.localIP();
    Serial.print("IP Address: ");
    Serial.println(ip);

    // print the received signal strength:
    long rssi = WiFi.RSSI();
    Serial.print("signal strength (RSSI):");
    Serial.print(rssi);
    Serial.println(" dBm");
}

```

As before, update the ssid and password first, then upload the example to your board.

Note we use `WiFiClientSecure client` instead of `WiFiClient client;` to require a SSL connection! This example will connect to a twitter server to download a JSON snippet that says how many followers adafruit has

```

Attempting to connect to SSID: Transit
.....
Connected to WiFi
SSID: Transit
IP Address: 192.168.1.182
signal strength (RSSI):-52 dBm

Starting connection to server...
connected to server
HTTP/1.1 200 OK
Accept-Ranges: bytes
Access-Control-Allow-Origin: platform.twitter.com
Access-Control-Allow-Methods: GET
Age: 12
cache-control: must-revalidate, max-age=600
content-disposition: attachment; filename=json.json
Content-Type: application/json; charset=utf-8
Date: Wed, 11 Nov 2020 20:58:39 GMT
expires: Wed, 11 Nov 2020 21:08:39 GMT
Last-Modified: Wed, 11 Nov 2020 20:58:27 GMT
Server: ECS (agb/52BA)
strict-transport-security: max-age=631138519
timing-allow-origin: *
X-Cache: HIT
x-connection-hash: a50988a9020759ec70520caef6c38bcf
x-content-type-options: nosniff
x-frame-options: SAMEORIGIN
x-response-time: 12
x-transaction: 003d88570028acec
x-tw-cdn: VZ
x-tw-cdn: VZ
x-xss-protection: 0
Content-Length: 197
Connection: close

[{"following":false,"id":"20731304","screen_name":"adafruit","name":"adafruit industries",
disconnecting from server.
Read 966 bytes

```

## JSON Parsing Demo

This example is a little more advanced - many sites will have API's that give you JSON data. We will build on the previous SSL example to connect to twitter and get that JSON data chunk

Then we'll use [ArduinoJSON](https://adafru.it/Evn) (<https://adafru.it/Evn>) to convert that to a format we can use and then display that data on the serial port (which can then be re-directed to a display of some sort)

First up, [use the Library manager to install ArduinoJSON](#) (<https://adafru.it/Evo>).

Then load the example JSONdemo by copying the code below and pasting it into your Arduino IDE.

```

// SPDX-FileCopyrightText: 2014 Benoit Blanchon
// SPDX-FileCopyrightText: 2014 Arturo Guadalupi
// SPDX-FileCopyrightText: 2020 Brent Rubell for Adafruit Industries
//
// SPDX-License-Identifier: MIT

/*
This example creates a client object that connects and transfers
data using always SSL, then shows how to parse a JSON document in an HTTP response.

It is compatible with the methods normally related to plain
connections, like client.connect(host, port).

```

Written by Arturo Guadalupi + Copyright Benoit Blanchon 2014-2019  
last revision November 2015

```
*/  
  
#include <WiFiClientSecure.h>  
#include <ArduinoJson.h>  
  
// uncomment the next line if you have a 128x32 OLED on the I2C pins  
// #define USE_OLED  
// uncomment the next line to deep sleep between requests  
// #define USE_DEEPSLEEP  
  
#if defined(USE_OLED)  
// Some boards have TWO I2C ports, how nifty. We should use the second one sometimes  
#if defined(ARDUINO_ADAFRUIT_QTPY_ESP32S2) || \  
    defined(ARDUINO_ADAFRUIT_QTPY_ESP32S3_NOPSRAM) || \  
    defined(ARDUINO_ADAFRUIT_QTPY_ESP32_PICO)  
    #define OLED_I2C_PORT &Wire1  
#else  
    #define OLED_I2C_PORT &Wire  
#endif  
  
#include <Adafruit_SSD1306.h>  
Adafruit_SSD1306 display = Adafruit_SSD1306(128, 32, OLED_I2C_PORT);  
#endif  
  
// Enter your WiFi SSID and password  
char ssid[] = "YOUR_SSID"; // your network SSID (name)  
char pass[] = "YOUR_SSID_PASSWORD"; // your network password (use for WPA, or  
use as key for WEP)  
int keyIndex = 0; // your network key Index number (needed  
only for WEP)  
  
int status = WL_IDLE_STATUS;  
// if you don't want to use DNS (and reduce your sketch size)  
// use the numeric IP instead of the name for the server:  
//IPAddress server(74,125,232,128); // numeric IP for Google (no DNS)  
  
#define SERVER "cdn.syndication.twimg.com"  
#define PATH "/widgets/followbutton/info.json?screen_names=adafruit"  
  
void setup() {  
    //Initialize serial and wait for port to open:  
    Serial.begin(115200);  
  
    // Connect to WPA/WPA2 network  
    WiFi.begin(ssid, pass);  
  
    #if defined(USE_OLED)  
        setupI2C();  
        delay(200); // wait for OLED to reset  
  
        if(!display.begin(SSD1306_SWITCHCAPVCC, 0x3C)) { // Address 0x3C for 128x32  
            Serial.println(F("SSD1306 allocation failed"));  
            for(;;); // Don't proceed, loop forever  
        }  
        display.display();  
        display.setTextSize(1);  
        display.setTextColor(WHITE);  
        display.clearDisplay();  
        display.setCursor(0,0);  
    #else  
        // Don't wait for serial if we have an OLED  
        while (!Serial) {  
            // wait for serial port to connect. Needed for native USB port only  
    
```

```

        delay(10);
    }
#endif
// attempt to connect to Wifi network:
Serial.print("Attempting to connect to SSID: ");
Serial.println(ssid);
#if defined(USE_OLED)
    display.clearDisplay(); display.setCursor(0,0);
    display.print("Connecting to SSID\n"); display.println(ssid);
    display.display();
#endif

while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
}

Serial.println("");
Serial.println("Connected to WiFi");

#if defined(USE_OLED)
    display.print("...OK!");
    display.display();
#endif

printWifiStatus();
}

uint32_t bytes = 0;

void loop() {
    WiFiClientSecure client;
    client.setInsecure(); // don't use a root cert

    Serial.println("\nStarting connection to server...");
#if defined(USE_OLED)
    display.clearDisplay(); display.setCursor(0,0);
    display.print("Connecting to "); display.print(SERVER);
    display.display();
#endif

    // if you get a connection, report back via serial:
    if (client.connect(SERVER, 443)) {
        Serial.println("connected to server");
        // Make a HTTP request:
        client.println("GET " PATH " HTTP/1.1");
        client.println("Host: " SERVER);
        client.println("Connection: close");
        client.println();
    }

    // Check HTTP status
    char status[32] = {0};
    client.readBytesUntil('\r', status, sizeof(status));
    if (strcmp(status, "HTTP/1.1 200 OK") != 0) {
        Serial.print(F("Unexpected response: "));
        Serial.println(status);
#if defined(USE_OLED)
        display.print("Connection failed, code: "); display.println(status);
        display.display();
#endif
    }
}

return;
}

// wait until we get a double blank line
client.find("\r\n\r\n", 4);

```

```

// Allocate the JSON document
// Use arduinojson.org/v6/assistant to compute the capacity.
const size_t capacity = JSON_ARRAY_SIZE(1) + JSON_OBJECT_SIZE(8) + 200;
DynamicJsonDocument doc(capacity);

// Parse JSON object
DeserializationError error = deserializeJson(doc, client);
if (error) {
    Serial.print(F("deserializeJson() failed: "));
    Serial.println(error.c_str());
    return;
}

// Extract values
JsonObject root_0 = doc[0];
Serial.println(F("Response:"));
const char* root_0_screen_name = root_0["screen_name"];
long root_0_followers_count = root_0["followers_count"];

Serial.print("Twitter username: "); Serial.println(root_0_screen_name);
Serial.print("Twitter followers: "); Serial.println(root_0_followers_count);
#if defined(USE_OLED)
    display.clearDisplay(); display.setCursor(0,0);
    display.setTextSize(2);
    display.println(root_0_screen_name);
    display.println(root_0_followers_count);
    display.display();
    display.setTextSize(1);
#endif

// Disconnect
client.stop();
delay(1000);

#if defined(USE_DEEPSLEEP)
#if defined(USE_OLED)
    display.clearDisplay();
    display.display();
#endif // OLED
#if defined(NEOPixel_POWER)
    digitalWrite(NEOPixel_POWER, LOW); // off
#elif defined(NEOPixel_I2C_POWER)
    digitalWrite(NEOPixel_I2C_POWER, LOW); // off
#endif
    // wake up 1 second later and then go into deep sleep
    esp_sleep_enable_timer_wakeup(10 * 1000UL * 1000UL); // 10 sec
    esp_deep_sleep_start();
#else
    delay(10 * 1000);
#endif
}

void setupI2C() {
    #if defined(ARDUINO_ADAFRUIT_QTPY_ESP32S2) || \
        defined(ARDUINO_ADAFRUIT_QTPY_ESP32S3_N0PSRAM) || \
        defined(ARDUINO_ADAFRUIT_QTPY_ESP32_PICO)
        // ESP32 is kinda odd in that secondary ports must be manually
        // assigned their pins with setPins()!
        Wire1.setPins(SDA1, SCL1);
    #endif

    #if defined(NEOPixel_I2C_POWER)
        pinMode(NEOPixel_I2C_POWER, OUTPUT);
        digitalWrite(NEOPixel_I2C_POWER, HIGH); // on
    #endif

    #if defined(ARDUINO_ADAFRUIT_FEATHER_ESP32S2)
        // turn on the I2C power by setting pin to opposite of 'rest state'
        pinMode(PIN_I2C_POWER, INPUT);
    
```

```

delay(1);
bool polarity = digitalRead(PIN_I2C_POWER);
pinMode(PIN_I2C_POWER, OUTPUT);
digitalWrite(PIN_I2C_POWER, !polarity);
#endif
}

void printWifiStatus() {
    // print the SSID of the network you're attached to:
    Serial.print("SSID: ");
    Serial.println(WiFi.SSID());

    // print your board's IP address:
    IPAddress ip = WiFi.localIP();
    Serial.print("IP Address: ");
    Serial.println(ip);

    // print the received signal strength:
    long rssi = WiFi.RSSI();
    Serial.print("signal strength (RSSI):");
    Serial.print(rssi);
    Serial.println(" dBm");
}

```

By default it will connect to the Twitter banner image API, parse the username and followers, and display them.

```

Attempting to connect to SSID: Transit
.....
Connected to WiFi
SSID: Transit
IP Address: 192.168.1.182
signal strength (RSSI):-54 dBm

Starting connection to server...
connected to server
Response:
Twitter username: adafruit
Twitter followers: 176400

```


## Usage with Adafruit IO

The ESP32-S2/S3 is an affordable, all-in-one, option for connecting your projects to the internet using our IoT platform, Adafruit IO (<https://adafru.it/Eg2>).


- For more information and guides about Adafruit IO, check out the [Adafruit IO Basics Series](https://adafru.it/iDX). (<https://adafru.it/iDX>)

# Install Libraries


In the Arduino IDE, navigate to Sketch -> Include Library->Manage Libraries...

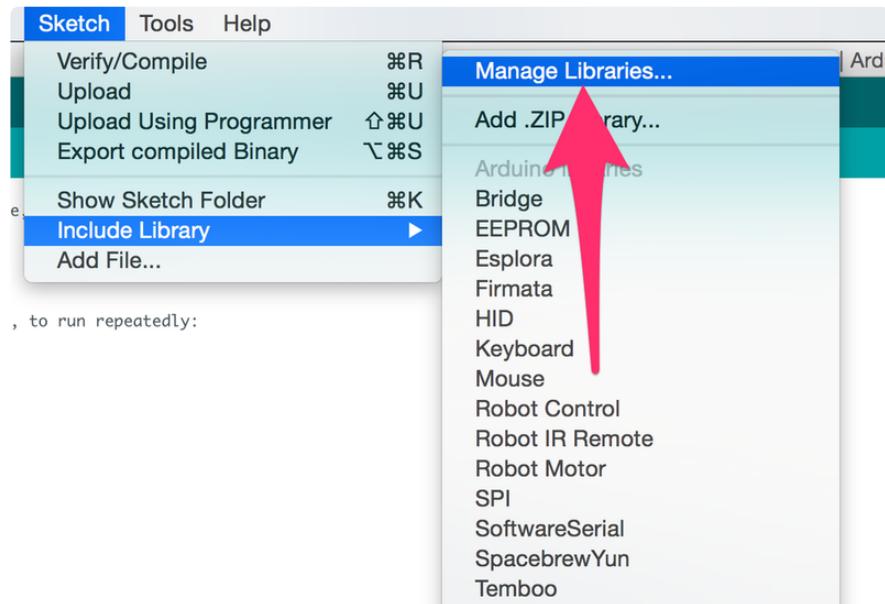

Enter Adafruit IO Arduino into the search box, and click Install on the Adafruit IO Arduino library option to install version 4.0.0 or higher.

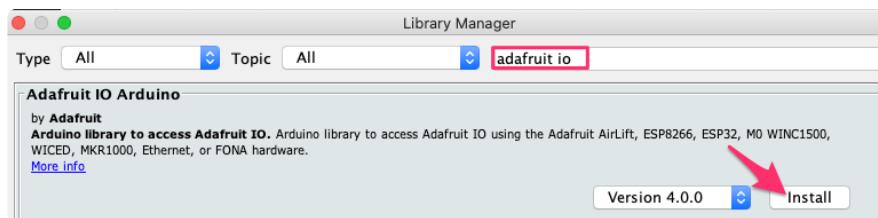

When asked to install dependencies, click Install all.

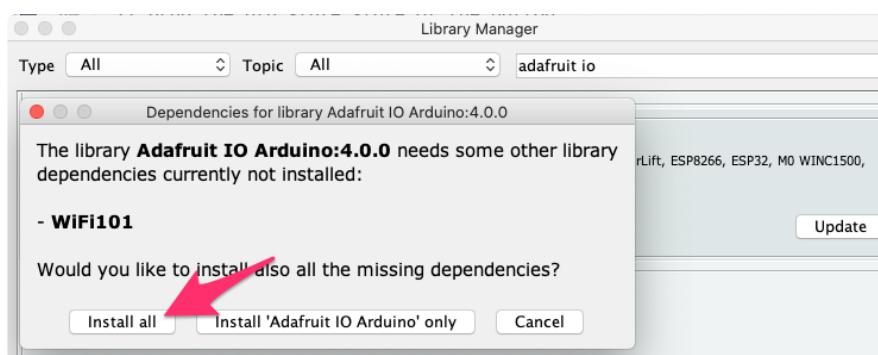

# Adafruit IO Setup


If you do not already have an Adafruit IO account, [create one now](https://adafru.it/fH9) (<https://adafru.it/fH9>). Next, navigate to the Adafruit IO Dashboards page.

We'll create a dashboard to visualize and interact with the data being sent between your ESP32-S2/S3 board and Adafruit IO.

The screenshot shows the Adafruit IO interface. At the top, there's a navigation bar with the Adafruit logo, 'Profile', and 'Feeds'. Below it, the user 'brubell' is selected, and the 'Dashboards' section is active. A prominent blue button labeled '+ New Dashboard' is highlighted with a red arrow. Below this, a modal window titled 'Create a new Dashboard' is open. It has fields for 'Name' (containing 'My ESP32-S2') and 'Description', both of which are empty. There are checkboxes for 'Show Header Image' and 'Header Image', with the latter having a 'Choose File' input field set to 'No file chosen'. A note below says 'Sample header image with breakpoints marked.' At the bottom of the modal are 'Cancel' and 'Create' buttons, with a red arrow pointing to the 'Create' button. In the background, a list of existing dashboards is visible, including 'LoRa Feather Network', 'My Air Quality Sensor', 'My ESP32-S2' (which is highlighted with a red arrow), and 'My Garage'. The 'My ESP32-S2' entry has the URL 'my-esp32-s2' next to it.


Click the New Dashboard button.  
Name your dashboard My ESP32-S2 or My ESP32-S3 depending on your board.  
Your new dashboard should appear in the list.  
Click the link to be brought to your new dashboard.

We'll want to turn the board's LED on or off from Adafruit IO. To do this, we'll need to add a toggle button to our dashboard.

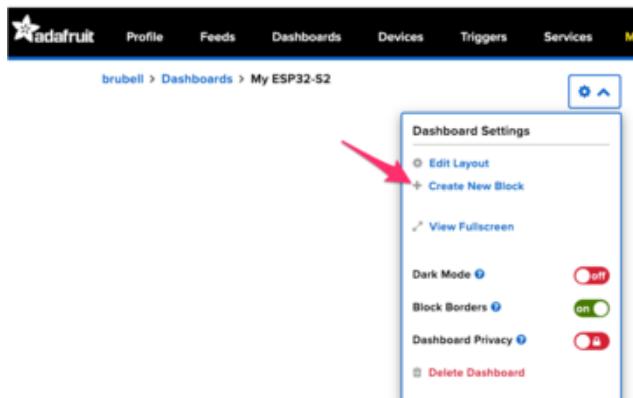

### Create a new block

Click on the block you would like to add to your dashboard. You can always switch the block type later if you change your mind.

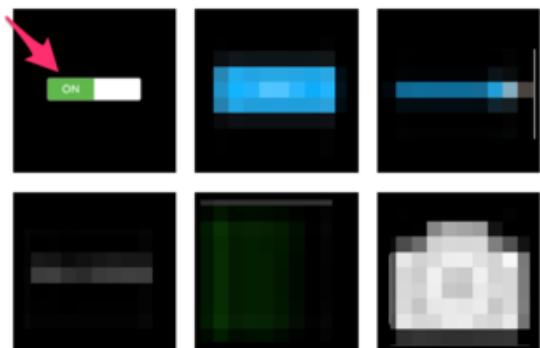

<input type="checkbox"/> led	HIGH	9 minutes
<input type="checkbox"/> lwill	rip	over 1 year
<input type="checkbox"/> moisture	2	1 day
<input type="checkbox"/> neopixel		2 days
<input type="checkbox"/> outdoor-lights	#000000	about 2 ye
<input type="checkbox"/> relay	morning	about 3 ho
<input type="checkbox"/> temperature	72	1 day
<input type="checkbox"/> test	66	2 days
<input type="checkbox"/> timecube	4.5	almost 2 ye
<input type="checkbox"/> zapemail	Gary Thompson...	1 day

led

Create

Click the cog at the top right hand corner of your dashboard.

In the dashboard settings dropdown, click Create New Block.

Select the toggle block.

Under My Feeds, enter led as a feed name. Click Create.

Choose the led feed to connect it to the toggle block. Click Next step.


My Feeds		
Feed Name	Last value	Recorded
<input type="checkbox"/> battery	55	1 day
<input type="checkbox"/> digital	1	about 17 hours
<input type="checkbox"/> humidity	10	2 days
<input type="checkbox"/> image	/9j/4QAWRXhp...	5 months
<input type="checkbox"/> indoor-lights	#000000	about 2 years
<input checked="" type="checkbox"/> led		less than a min...
<input type="checkbox"/> lwill	rip	over 1 year
<input type="checkbox"/> moisture	2	1 day
<input type="checkbox"/> neopixel		2 days
<input type="checkbox"/> outdoor-lights	#000000	about 2 years



Under Block Settings,

Change Button On Text to 1  
Change Button Off Text to 0  
Click Create block

Next up, we'll want to display button press data from your board on Adafruit IO. To do this, we'll add a gauge block to the Adafruit IO dashboard. A gauge is a read only block type that shows a fixed range of values.

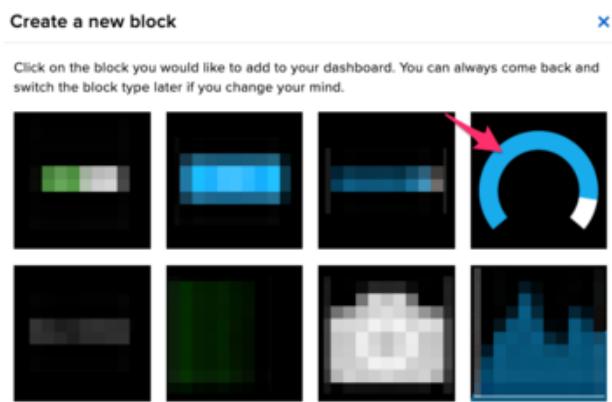

<input type="checkbox"/> image	/9j/4QAWRXhp...	5 months	🔒
<input type="checkbox"/> indoor-lights	#000000	about 2 years	🔒
<input type="checkbox"/> led		16 minutes	🔒
<input type="checkbox"/> lwill	rip	over 1 year	🔒
<input type="checkbox"/> moisture	2	1 day	🔒
<input type="checkbox"/> neopixel		2 days	🔒
<input type="checkbox"/> outdoor-lights	#000000	about 2 years	🔒
<input type="checkbox"/> relay	morning	about 3 hours	🔒
<input type="checkbox"/> temperature	72	1 day	🔒
<input type="checkbox"/> test	66	2 days	🔒
<input type="checkbox"/> timecube	4.5	almost 2 years	🔒
<input type="checkbox"/> zapemail	Gary Thompson... 1 day		🔒
<input type="checkbox"/> button			
	<b>Create</b>		

## Create a Gauge Block

A gauge is a read only block type that shows a fixed range of values.

Choose a single feed you would like to connect to this gauge. You can choose a feed within a group.

Search for a feed

### My Feeds

Feed Name	Last value
<input type="checkbox"/> battery	55
<input checked="" type="checkbox"/> button	

Click the cog at the top right hand corner of your dashboard.

In the dashboard settings dropdown, click Create New Block.


Select the gauge block.

Under My Feeds, enter button as a feed name.

Click Create.

Choose the button feed to connect it to the toggle block.


Click Next step.

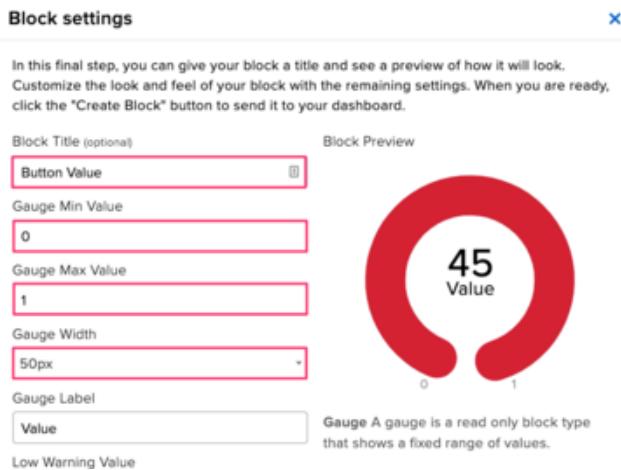

Under block settings,

- Change Block Title to Button Value
- Change Gauge Min Value to 0, the button's state when it's off
- Change Gauge Max Value to 1, the button's state when it's on
- Click Create block

Your dashboard should look like the following:

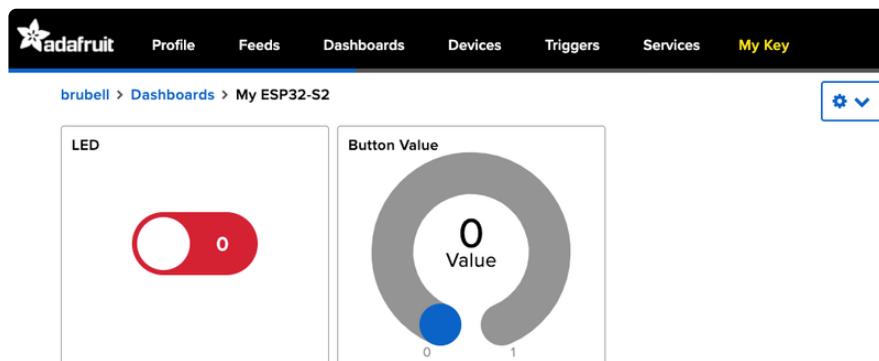

## Code Usage

For this example, you will need to open the adafruitio\_26\_led\_btn example included with the Adafruit IO Arduino library. In the Arduino IDE, navigate to File -> Examples -> Adafruit IO Arduino -> adafruitio\_26\_led\_btn.


Before uploading this code to the ESP32-S2/S3, you'll need to add your network and Adafruit IO credentials. Click on the config.h tab in the sketch.

Obtain your Adafruit IO Credentials from [navigating to io.adafruit.com and clicking My Key \(<https://adafru.it/fsU>\)](https://io.adafruit.com). Copy and paste these credentials next to `IO_USERNAME` and `IO_KEY`.



```
adafruitio_26_led_btn - config.h | Arduino 1.8.13
adafruitio_26_led_btn config.h
1 //***** Adafruit IO Config *****
2
3 // visit io.adafruit.com if you need to create an account,
4 // or if you need your Adafruit IO key.
5 #define IO_USERNAME "your_username"
6 #define IO_KEY "your_key"
7
```


Enter your network credentials next to `WIFI_SSID` and `WIFI_PASS`.

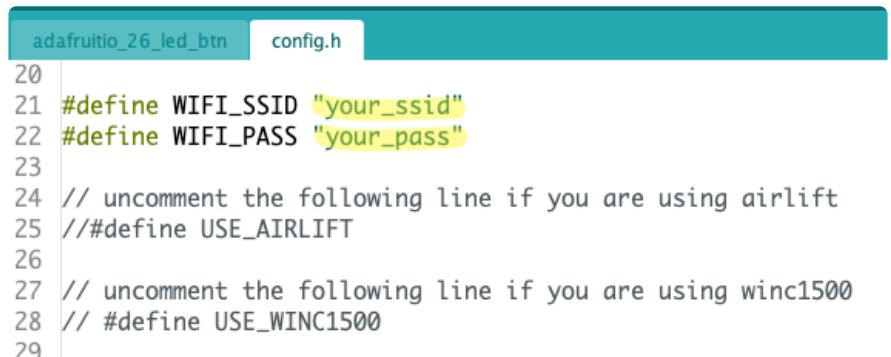


```
adafruitio_26_led_btn config.h
20
21 #define WIFI_SSID "your_ssid"
22 #define WIFI_PASS "your_pass"
23
24 // uncomment the following line if you are using airlift
25 //#define USE_AIRLIFT
26
27 // uncomment the following line if you are using winc1500
28 // #define USE_WINC1500
29
```

Click the Upload button to upload your sketch to the ESP32-S2/S3. After uploading, press the RESET button on your board to launch the sketch.

Open the Arduino Serial monitor and navigate to the Adafruit IO dashboard you created. You should see the gauge response to button press and the board's LED light up in response to the Toggle Switch block.

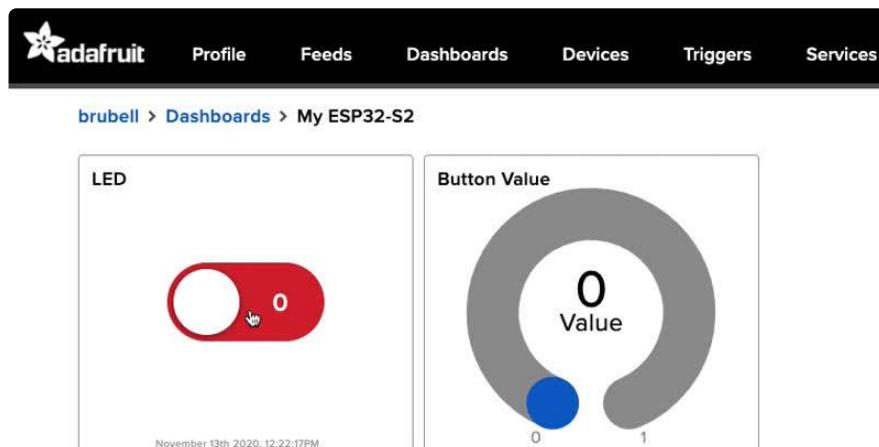

You should also see the ESP32-S2/S3's LED turning on and off when the LED is toggled:

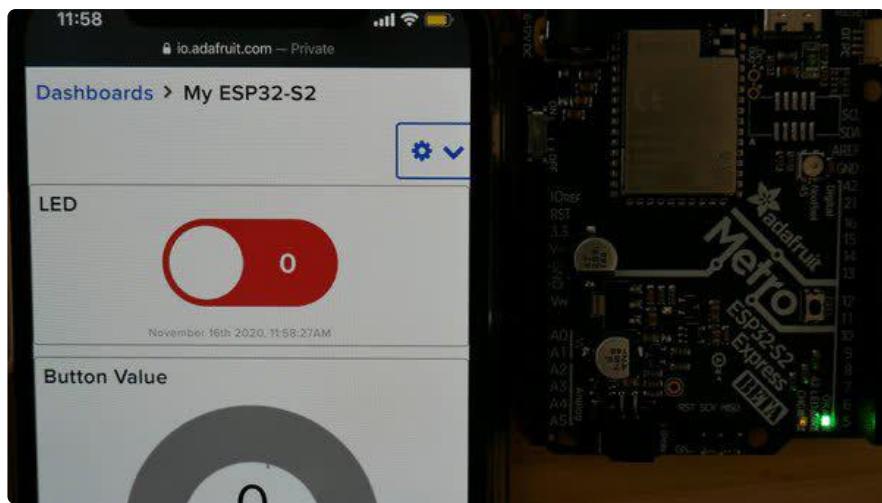


## Factory Shipped Demo

Your Adafruit ESP32-S2 TFT Feather ships from the factory with a I2C and graphics test demo. You can download a UF2 of the demo from the [Factory Reset page](https://adafru.it/XTE) (<https://adafru.it/XTE>). The UF2 does not give you access to the source code to allow you to see what is going on in the code and potentially edit it. This page provides the factory demo source code, including walking you through what libraries to install to get it going.


## Arduino Library Installation

You can install the necessary libraries from the Library Manager. To open, click Sketch > Include Library > Manage Libraries...

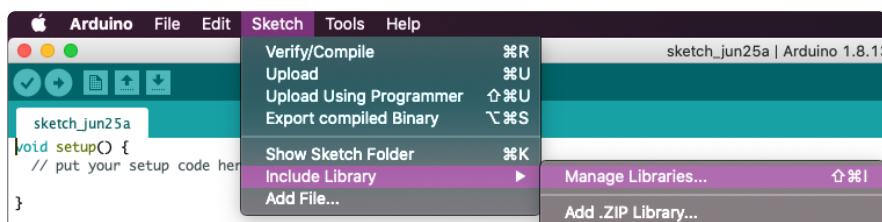


Next, you'll search for the following libraries, and install them and any necessary dependencies.


Search for LC709203F and install the Adafruit LC709203F Library.

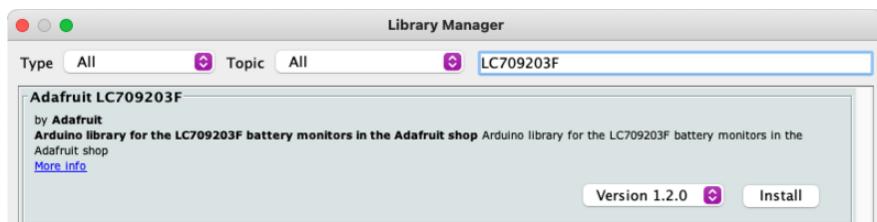

When asked to install dependencies, click Install all.

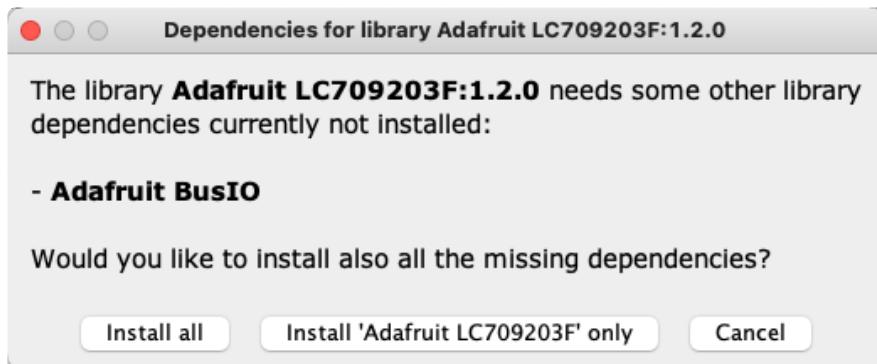


Search for NeoPixel and install the Adafruit NeoPixel library.

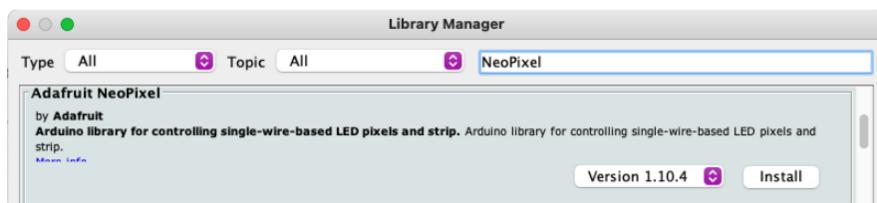


Search for TestBed and install the Adafruit TestBed library.



When asked to install dependencies, click Install all.

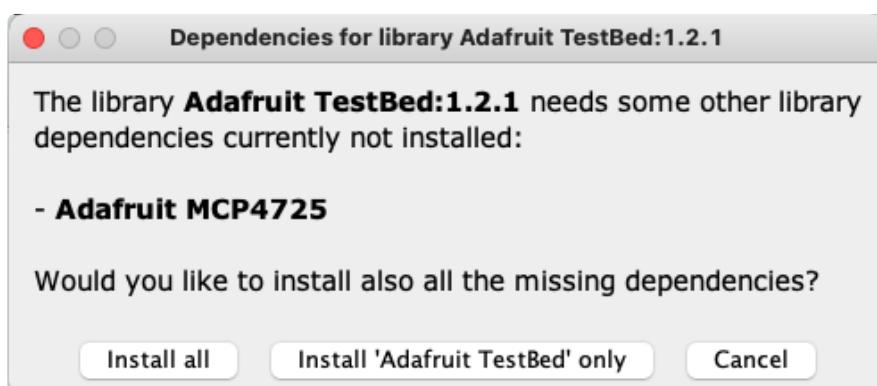

Search for BME280 and install the Adafruit BME280 Library.

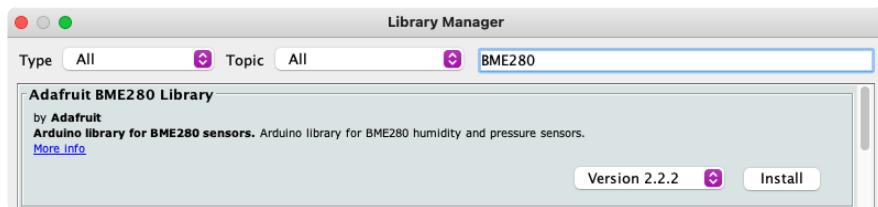


When asked to install dependencies, click Install all.



Search for ST7789 and install the Adafruit ST7735 and ST7789 Library.



When asked to install dependencies, click Install all.

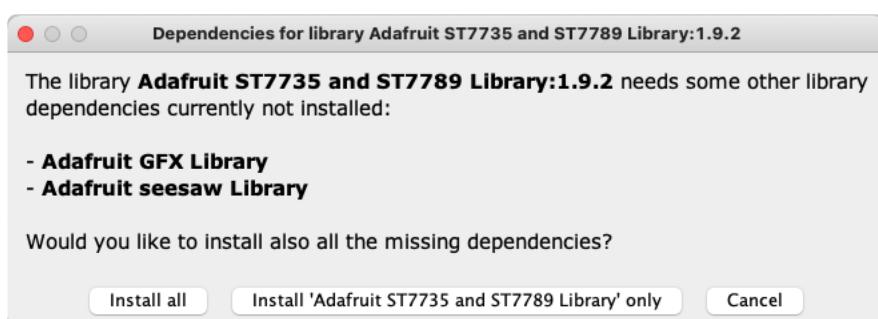

## Factory Demo Example Code

Now, you'll want to upload the following sketch onto your ESP32-S2 TFT Feather.

```
// SPDX-FileCopyrightText: 2022 Limor Fried for Adafruit Industries
// SPDX-License-Identifier: MIT
```

```

#include <Arduino.h>
#include "Adafruit_LC709203F.h"
#include <Adafruit_NeoPixel.h>
#include "Adafruit_TestBed.h"
#include <Adafruit_BME280.h>
#include <Adafruit_ST7789.h>
#include <Fonts/FreeSans12pt7b.h>

Adafruit_BME280 bme; // I2C
bool bmeFound = false;
extern Adafruit_TestBed TB;

Adafruit_LC709203F lc;
Adafruit_ST7789 display = Adafruit_ST7789(TFT_CS, TFT_DC, TFT_RST);

GFXcanvas16 canvas(240, 135);

void setup() {
    Serial.begin(115200);
    // while (! Serial) delay(10);

    delay(100);

    // turn on the TFT / I2C power supply
    pinMode(TFT_I2C_POWER, OUTPUT);
    digitalWrite(TFT_I2C_POWER, HIGH);

    pinMode(NEOPixel_POWER, OUTPUT);
    digitalWrite(NEOPixel_POWER, HIGH);
    delay(10);

    TB.neopixelPin = PIN_NEOPixel;
    TB.neopixelNum = 1;
    TB.begin();
    TB.setColor(WHITE);

    display.init(135, 240);           // Init ST7789 240x135
    display.setRotation(3);
    canvas.setFont(&FreeSans12pt7b);
    canvas.setTextColor(ST77XX_WHITE);

    if (!lc.begin()) {
        Serial.println(F("Couldnt find Adafruit LC709203F?\nMake sure a battery is
plugged in!"));
        while (1);
    }

    Serial.println("Found LC709203F");
    Serial.print("Version: 0x"); Serial.println(lc.getICversion(), HEX);
    lc.setPackSize(LC709203F_AP_500MAH);

    if (TB.scanI2CBus(0x77)) {
        Serial.println("BME280 address");

        unsigned status = bme.begin();
        if (!status) {
            Serial.println("Could not find a valid BME280 sensor, check wiring, address,
sensor ID!");
            Serial.print("SensorID was: 0x"); Serial.println(bme.sensorID(),16);
            Serial.print("      ID of 0xFF probably means a bad address, a BMP 180 or
BMP 085\n");
            Serial.print("      ID of 0x56-0x58 represents a BMP 280,\n");
            Serial.print("      ID of 0x60 represents a BME 280.\n");
            Serial.print("      ID of 0x61 represents a BME 680.\n");
            return;
        }
        Serial.println("BME280 found OK");
        bmeFound = true;
    }
}

```

```

}


uint8_t j = 0;

void loop() {
    Serial.println("*****");
    TB.printI2CBusScan();

    if (j % 5 == 0) {
        canvas.fillScreen(ST77XX_BLACK);
        canvas.setCursor(0, 25);
        canvas.setTextColor(ST77XX_RED);
        canvas.println("Adafruit Feather");
        canvas.setTextColor(ST77XX_YELLOW);
        canvas.println("ESP32-S2 TFT Demo");
        canvas.setTextColor(ST77XX_GREEN);
        canvas.print("Battery: ");
        canvas.setTextColor(ST77XX_WHITE);
        canvas.print(lc.cellVoltage(), 1);
        canvas.print(" V / ");
        canvas.print(lc.cellPercent(), 0);
        canvas.println("%");
        canvas.setTextColor(ST77XX_BLUE);
        canvas.print("I2C: ");
        canvas.setTextColor(ST77XX_WHITE);
        for (uint8_t a=0x01; a<=0x7F; a++) {
            if (TB.scanI2CBus(a, 0)) {
                canvas.print("0x");
                canvas.print(a, HEX);
                canvas.print(", ");
            }
        }
        display.drawRGBBitmap(0, 0, canvas.getBuffer(), 240, 135);
        pinMode(TFT_BACKLITE, OUTPUT);
        digitalWrite(TFT_BACKLITE, HIGH);
    }

    TB.setColor(TB.Wheel(j++));
    delay(10);
    return;
}

```

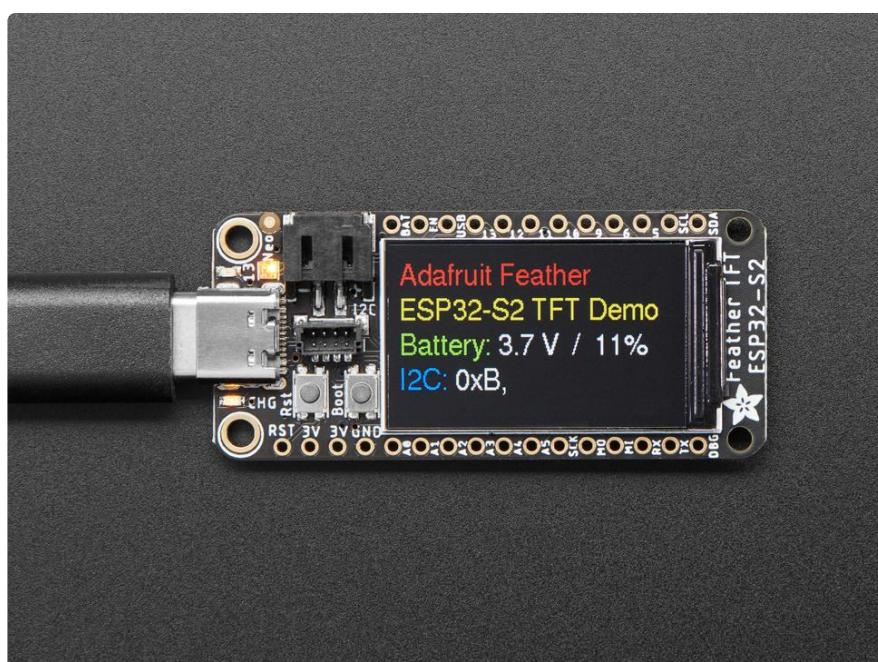

Open the serial monitor to see the data printed out.



Now your Feather TFT is back to the state in which it shipped! And, loading it from code allows you to learn more, or change it to do something different.

## WipperSnapper Setup

WipperSnapper is in BETA and is actively being developed to add functionality, hardware, and fix bugs. We encourage you to try out WipperSnapper with the understanding that it is not final release software and is still in development. If you encounter any bugs, glitches, or difficulties during the beta period, or with this guide, please contact us via <http://io.adafruit.com/support>

WipperSnapper is our no-code interface for interacting with your internet-connected development board over the internet. This is a great option if you want to quickly create an IoT project which logs data to the internet or controls your board from the internet.

### What is WipperSnapper?

WipperSnapper is an interface for [Adafruit IO, our incredibly easy-to-use IoT platform](#) (<https://adafru.it/V5A>), designed to turn any WiFi-capable board into an IoT device without programming a single line of code.

Simply load the WipperSnapper firmware onto your board, add credentials, and plug it into power. Your board will automatically register itself with your Adafruit IO account.

From there, you can add components to your board such as buttons, switches, potentiometers, sensors, and more! Components are dynamically added to hardware, so you can immediately start interacting, logging, and streaming the data your projects produce without writing code.

# Sign up for Adafruit.IO

[Adafruit IO](https://adafru.it/fsU) (<https://adafru.it/fsU>) is a platform designed by Adafruit to display, respond, and interact with your project's data.

You need an Adafruit IO account to use Adafruit.io Wippersnapper.


If you do not already have an Adafruit IO account set up, head over to [io.adafruit.com](https://io.adafruit.com) (<https://adafru.it/fH9>) and register for a free Adafruit IO account.

## Install WipperSnapper


First, download the latest version of WipperSnapper for this board:

Download the latest release of  
WipperSnapper for this board

<https://adafru.it/V5E>

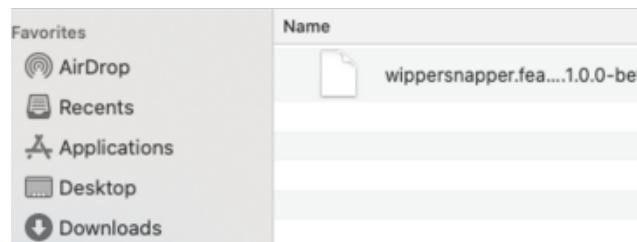


Save the .UF2 file to a convenient spot on your computer.

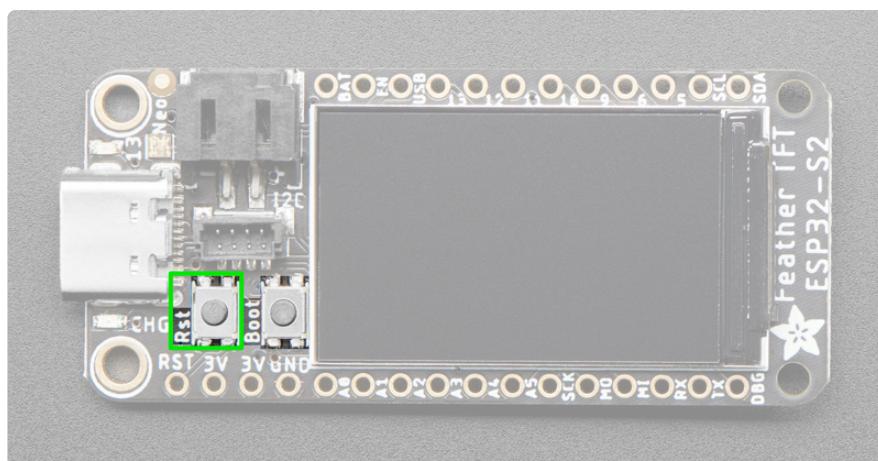



If double-clicking doesn't work the first time, try again. Sometimes it can take a few tries to get the rhythm right!

A lot of people end up using charge-only USB cables and it is very frustrating! Make sure you have a USB cable you know is good for data sync.

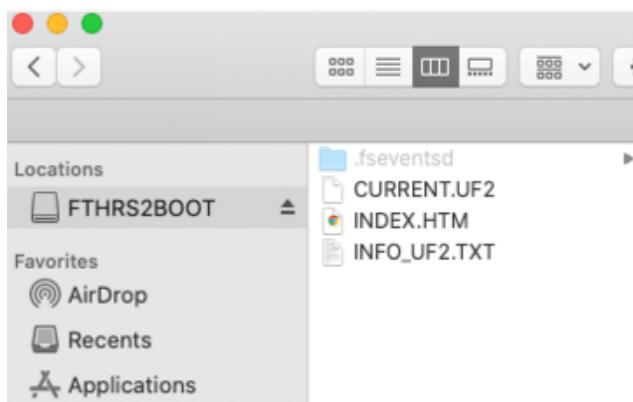

You will see a new disk drive appear called FTHRS2BOOT.

Drag the wipersnapper/etc.uf2 file to FTHRS2BOOT.

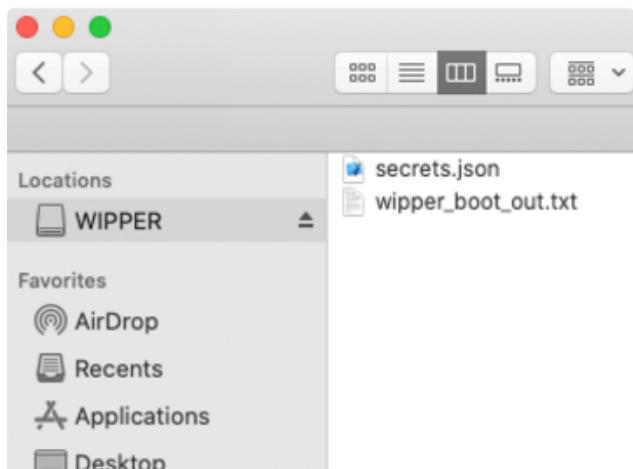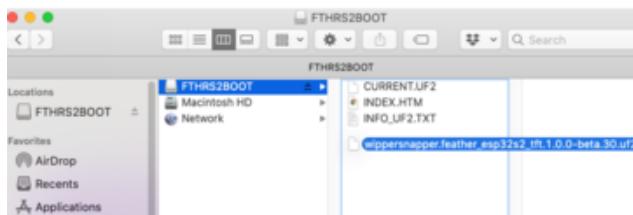

The BOOT drive will disappear and a new drive called WIPPER will appear with two files, secrets.json and wipper\_boot\_out.txt, on the filesystem.

# WipperSnapper Configuration

We expect educators, scientists, artists, and makers to need quick and easy access to their WiFi network credentials, along with a way of storing their Adafruit IO credentials.

WipperSnapper uses a secrets.json file on the WIPPER drive to hold your Adafruit IO credentials and network credentials.

You do not need to repeat the following steps each time you upgrade the WipperSnapper firmware via uploading the UF2 file. Once a board is registered with Adafruit IO, WipperSnapper will remember it until you delete the board on the website.

Open the secrets.json file using a text editor.

Inside is a [JSON](https://adafru.it/FGu)-formatted text file with a line for each credential item. Each item has a name (such as your Adafruit IO username, `io_username`) and then a colon to separate it from the item key (such as `YOUR_IO_USERNAME_HERE`) and finally a comma.

```
{  
  "io_username": "YOUR_IO_USERNAME_HERE",  
  "io_key": "YOUR_IO_KEY_HERE",  
  "network_type_wifi_native": {  
    "network_ssid": "YOUR_WIFI_SSID_HERE",  
    "network_password": "YOUR_WIFI_PASS_HERE"  
  }  
}
```

To obtain your Adafruit IO credentials, navigate to [Adafruit IO](https://adafru.it/TAu) and click My Key. A modal will pop up with your Adafruit IO Username and Adafruit IO Key.

Copy both of these values.

In the secrets.json file, replace `YOUR_IO_USERNAME_HERE` with your Adafruit IO username. Then, replace `YOUR_IO_KEY_HERE` with the value of your Adafruit IO active key.

```
{  
  "io_username": "learningsystem",  
  "io_key": "aio_superlongkeyname",  
  "network_type_wifi_native": {  
    "network_ssid": "YOUR_WIFI_SSID_HERE",  
  }  
}
```

```
        "network_password": "YOUR_WIFI_PASS_HERE"  
    }  
}
```

Next, it's time to enter your wireless network credentials. Replace **YOUR\_WIFI\_SSID\_HERE** with your WiFi SSID. Replace **YOUR\_WIFI\_PASS\_HERE** with your WiFi network password.

Your final secrets.json file should look something like this:


```
{  
    "io_username": "learningsystem",  
    "io_key": "aio_superlongkeyname",  
    "network_type_wifi_native": {  
        "network_ssid": "mywifinetworkname",  
        "network_password": "mynetworkpassword"  
    }  
}
```

On a web browser, navigate to the [Adafruit IO website](https://adafru.it/TAu) (<https://adafru.it/TAu>). Keep this page open during this step.


Next, safely eject the WIPPER drive.

Then, Press your board's RESET (RST) button once.

On the web page, you should see a new modal pop-up with a picture of your board! Give your board a name and click Continue to Device Page

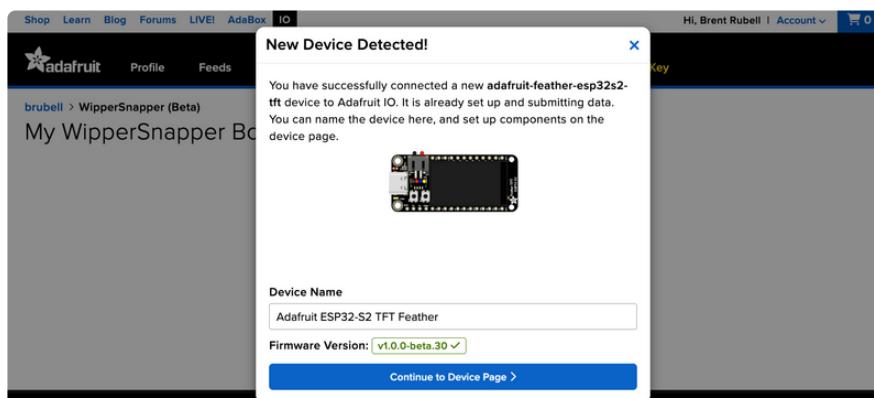

You should be brought to the board's interface page.

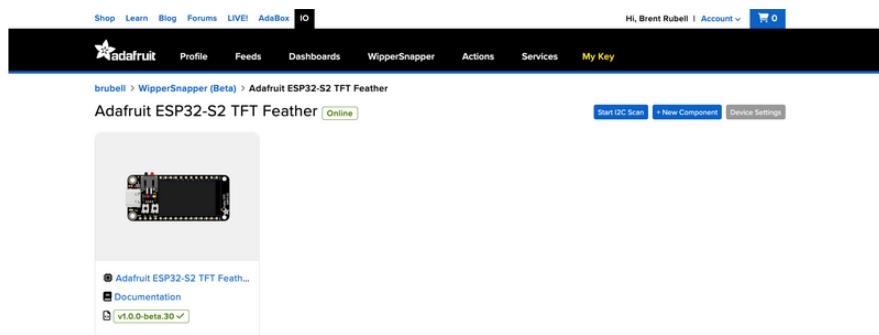

Congrats - you have successfully set up your board and connected it to WipperSnapper! Next, let's learn how to use WipperSnapper.

## WipperSnapper Usage

Now that you've installed WipperSnapper on your board - let's learn how to use it!

There's a large number of components (physical parts like buttons, switches, sensors, actuators) supported by WipperSnapper, but this page will get you started with the core concepts to build an IoT project with WipperSnapper.


### Blink a LED

One of the first programs you typically write to get used to embedded programming is a sketch that repeatably blinks an LED. IoT projects are wireless so after completing this section, you'll be able to turn on (or off) the LED built into your Feather from anywhere in the world.


In this demo, we show controlling an LED from WipperSnapper. But the same kind of control can be used for relays, lights, motors, or solenoids.

This page assumes that you have installed WipperSnapper on your Feather and registered it with the Adafruit.io WipperSnapper web page. If you have not done this yet, please go back to the previous page in this guide and connect your Feather.


On a web browser, [navigate to Adafruit.io WipperSnapper](https://adafru.it/TAu) (<https://adafru.it/TAu>). You should see your Feather board listed on this page.

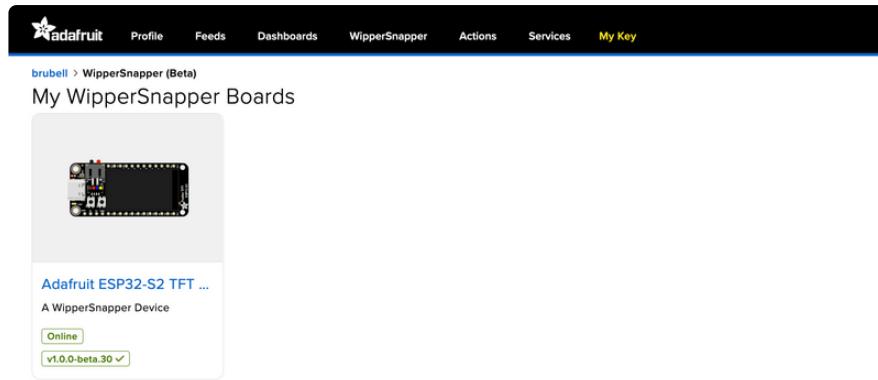

Click the image of your Feather to navigate to its device page.

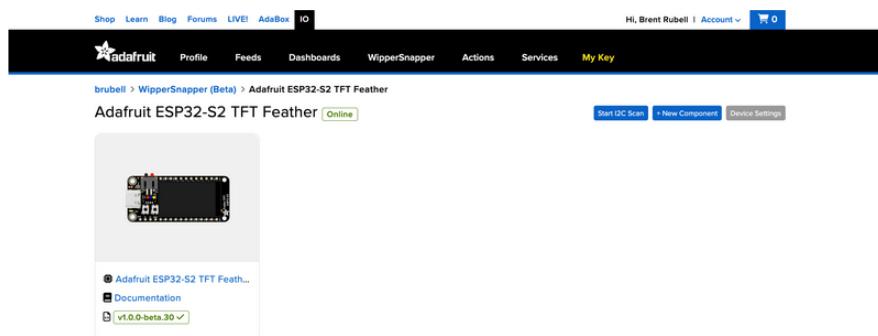


Before the next steps, you'll want to verify that your Feather is online and ready to receive commands from WipperSnapper. To check this, look at the online status badge on the upper left of the device page. It should be green and say Online.

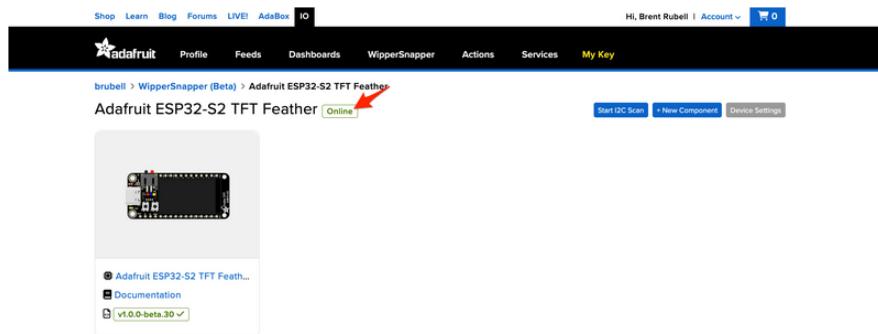


If the Feather appears offline on the website but was previously connected, press the Reset (RST) button to force the board to reboot.

Next, click + New Component to open the Component Picker.

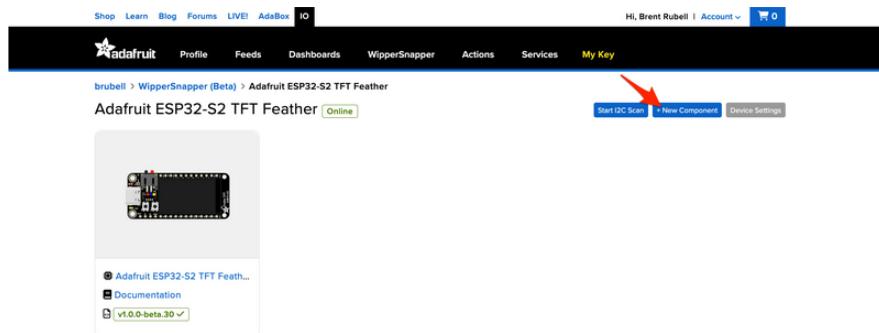


The Component Picker lists all the available components, sensors, and parts, which can be used with WipperSnapper. The Feather already has a LED built-in, so there's no wiring for you to configure.

Click the LED component.

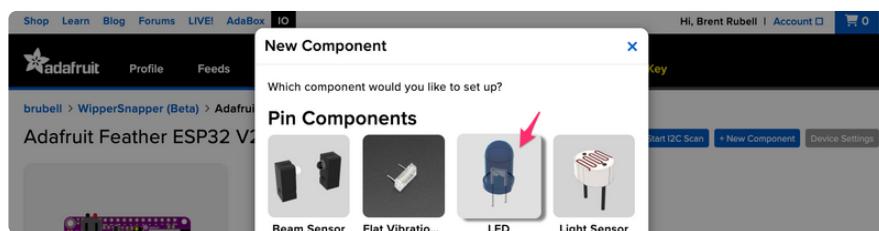


Feathers contain GPIO pins that can be configured either as an input or an output. The "Create LED Component" screen tells WipperSnapper to configure a general-purpose output pin connected to the LED on your Feather as a digital output so you can turn the LED on or off.


The ESP32-S2 TFT Feather has a built-in LED located at GPIO #13. Select this pin as the LED Pin and click Create Component

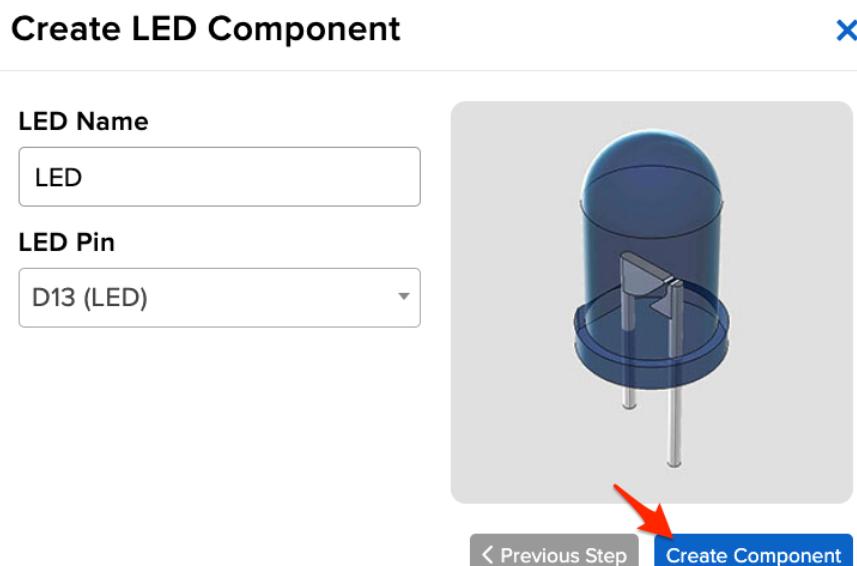

WipperSnapper should send a command to your board telling it to configure the GPIO pin as a digital output. Your WipperSnapper dashboard should also show the new LED component.

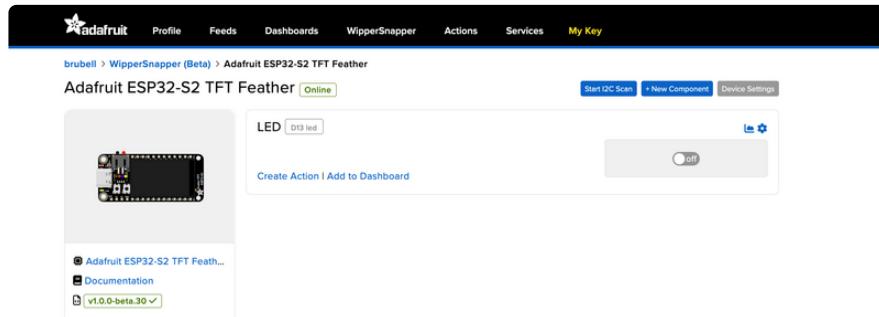

On the device interface, toggle the LED component by clicking the toggle switch. This should turn your Feather's built-in LED on or off.

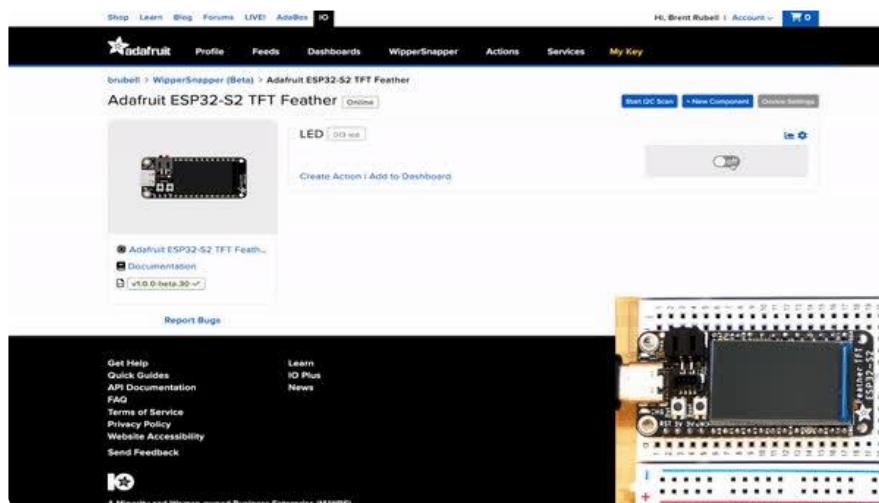

## Read a Push-Button


You can also configure a WipperSnapper board to wirelessly read data from standard input buttons, switches, or digital sensors, and send the state to Adafruit IO.

Let's wire up a push-button to a Feather and configure it with WipperSnapper to publish a value to Adafruit IO when the button has been pressed or de-pressed.

In this demo, we show reading the state of a push-button from WipperSnapper. But the same kind of control can be used for reading switches, break beam sensors, and other digital sensors.

## Wiring

We'll be using the Feather's internal pull-up resistors instead of a physical resistor.

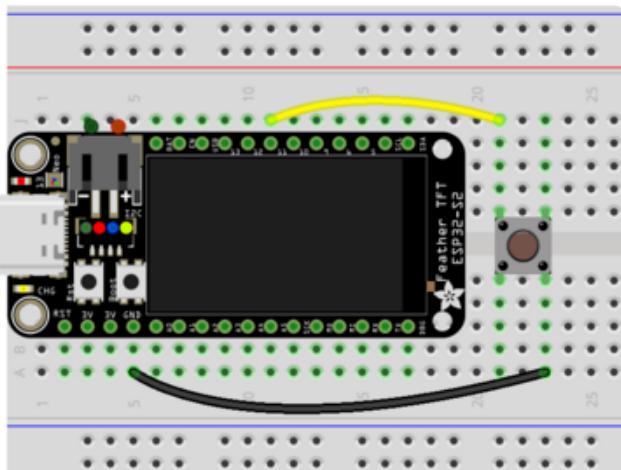


Make the following connections between the Feather and the push-button:


Feather GND to one leg of the push-button  
Feather GPIO11 to a leg on the opposite side of the push-button

## Usage


On a web browser, [navigate to Adafruit.io WipperSnapper](https://adafru.it/TAu) (<https://adafru.it/TAu>) and click on your Feather. Next, click + New Component to open the Component Picker.

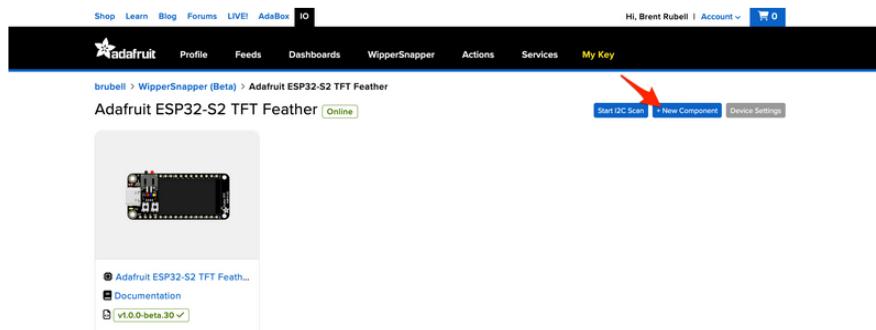

From the component picker, select the Push Button.

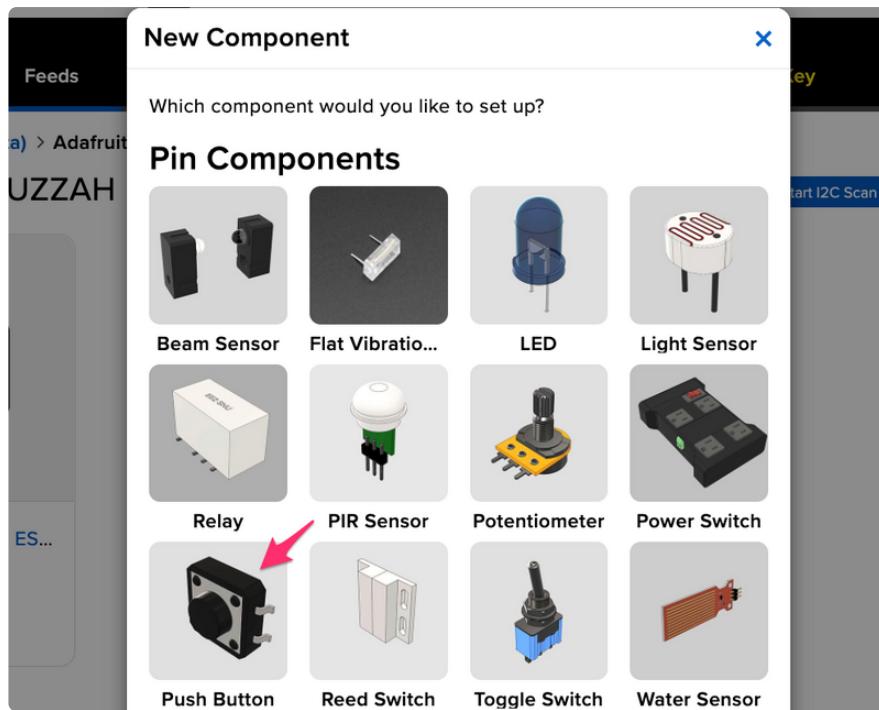

The next screen presents you with options for configuring the push button. Start by selecting the Feather's digital pin you connected to the push button.

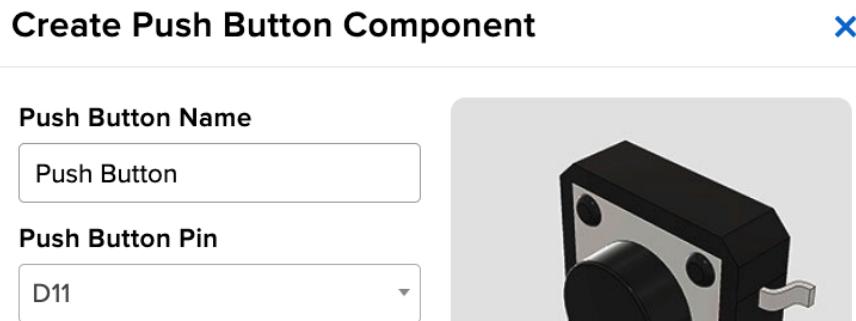

The Return Interval dictates how frequently the value of the push-button will be sent from the Feather to Adafruit IO. For this example, the push-button's value should only be sent when its pressed.

Select On Change

## Create Push Button Component

X

### Push Button Name

### Push Button Pin

### Return Interval

 On Change Periodically

Finally, check the Specify Pin Pull Direction checkbox and select Pull Up to turn on the Feather's internal pullup resistor.

## Create Push Button Component

X

### Push Button Name

### Push Button Pin

### Return Interval

 On Change Periodically

Specify Pin Pull Direction?

Pull Up

Pull Down



< Previous Step

Create Component

Make sure the form's settings look like the following screenshot. Then, click Create Component.

## Create Push Button Component

X

### Push Button Name

Push Button

### Push Button Pin

D11

### Return Interval

On Change

Periodically

Specify Pin Pull Direction?

Pull Up

Pull Down



< Previous Step


Create Component



WipperSnapper should send a command to your board, telling it to configure the GPIO pin you selected to behave as a digital input pin and to enable it to pull up the internal resistor. Your WipperSnapper dashboard should also show the new push button component.

The screenshot shows the Adafruit IO WipperSnapper interface. At the top, there's a navigation bar with links like Shop, Learn, Blog, Forums, LIVE!, AdaBox, IO, Profile, Feeds, Dashboards, WipperSnapper, Actions, Services, and My Key. A user 'brent' is logged in. Below the navigation, the URL is 'brubell > WipperSnapper (Beta) > Adafruit ESP32-S2 TFT Feather [Online]'. There are buttons for 'Start I2C Scan', '+ New Component', and 'Device Settings'. The main area displays a component card for a 'Push Button' on the 'D11 push\_button "UP"' pin. The card shows a small image of the ESP32 board, the component name, its status as 'Online', and a preview image showing the button in an 'Unpressed' state. Below the card, there are links to 'Adafruit ESP32-S2 TFT Feather...', 'Documentation', and 'v1.0.0-beta.30 ✓'. A 'Create Action | Add to Dashboard' button is also visible.

Press the button to change the value of the push button component on Adafruit IO.

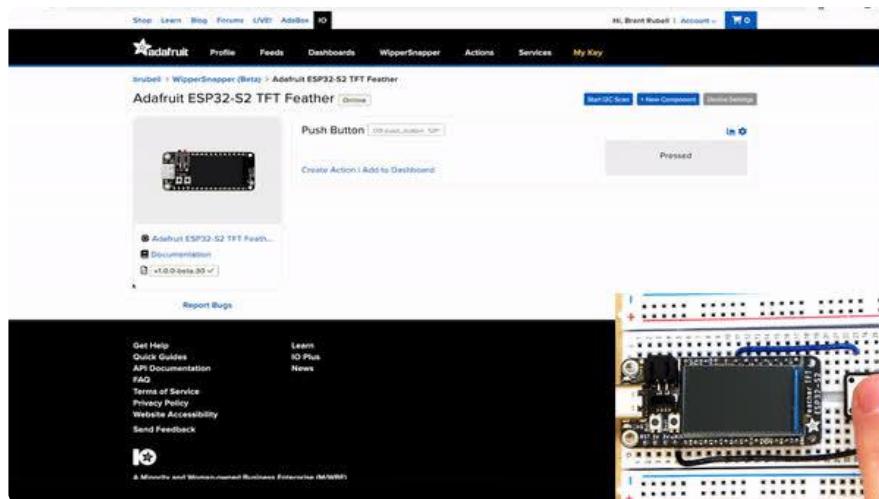

## Read an I2C Sensor

Inter-Integrate Circuit, aka I2C, is a two-wire protocol for connecting sensors and "devices" to a microcontroller. A large number of sensors, including the ones sold by Adafruit, use I2C to communicate.


Typically, using I2C with a microcontroller involves programming. WipperSnapper lets you configure a microcontroller to read data from an I2C sensor and publish that data to the internet without writing code.

WipperSnapper supports a number of I2C sensors, [viewable in list format here](https://adafru.it/Zbq) (<https://adafru.it/Zbq>). If you do not see the I2C sensor you're attempting to use with WipperSnapper - [we have a guide on adding a component to WipperSnapper here](https://adafru.it/Zbr) (<https://adafru.it/Zbr>).


The process of adding an I2C component to your WipperSnapper board is similar between most sensors. For this section, we're using the [Adafruit AHT20](https://adafru.it/RKe) (<https://adafru.it/RKe>), an inexpensive sensor that can read ambient temperature and humidity.

## Wiring

First, wire up an AHT20 sensor to your board exactly as follows. Here is an example of the AHT20 wired to a Feather using I2C [with a STEMMA QT cable \(no soldering required\)](https://adafru.it/FA-) (<https://adafru.it/FA->).

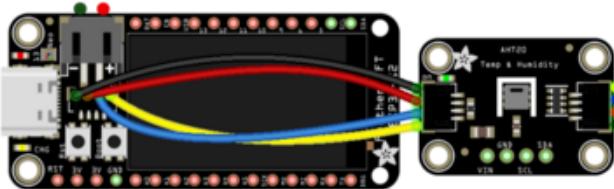

Make the following connections between the ESP32-S2 TFT Feather and the AHT20:

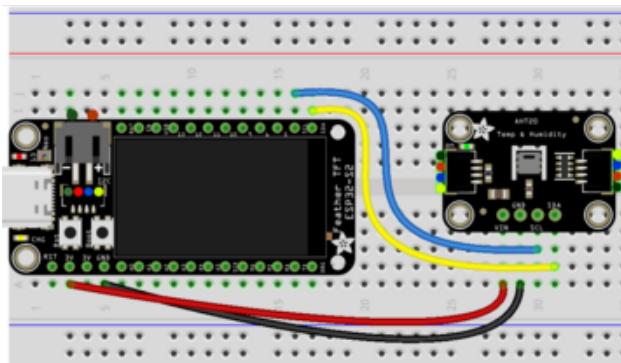

Board 3V to sensor VIN (red wire on STEMMA QT)

Board GND to sensor GND (black wire on STEMMA QT)

Board SCL to sensor SCL (yellow wire on STEMMA QT)


Board SDA to sensor SDA (blue wire on STEMMA QT)

## Scan I2C Bus

On a web browser, [navigate to Adafruit.io WipperSnapper](https://adafru.it/TAu) (<https://adafru.it/TAu>). Click on the Feather board to enter its device page.

To ensure that you've correctly wired the AHT20 sensor to your Feather and to test that the Feather can communicate with Adafruit IO, you'll first perform an I2C scan.

On the upper right-hand corner of the device interface, click Start I2C Scan.

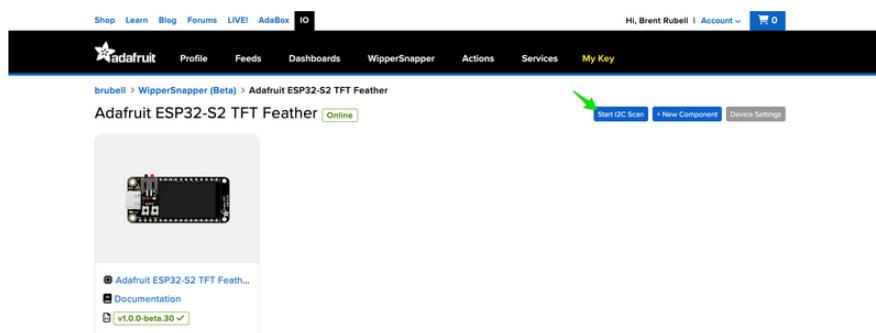

You should see a new pop-up showing a list of the I2C addresses detected by an I2C scan. If wired correctly, the AHT20's default I2C address of **0x38** appear in the I2C scan list.

	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f
00	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
10	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
20	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
30	--	--	--	--	--	--	--	--	38	--	--	--	--	--	--	--
40	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
50	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
60	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
70	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

[Close](#) [Scan Again](#)

## I don't see the I2C sensor's address in the list


First, double-check the connection and/or wiring between the sensor and the board.

Then, reset the board and let it re-connect to Adafruit IO WipperSnapper.

## Create the Sensor Component


Now that you know the sensor can be detected by the Feather, it's time to configure and create the sensor on WipperSnapper.

Start by clicking +New Component

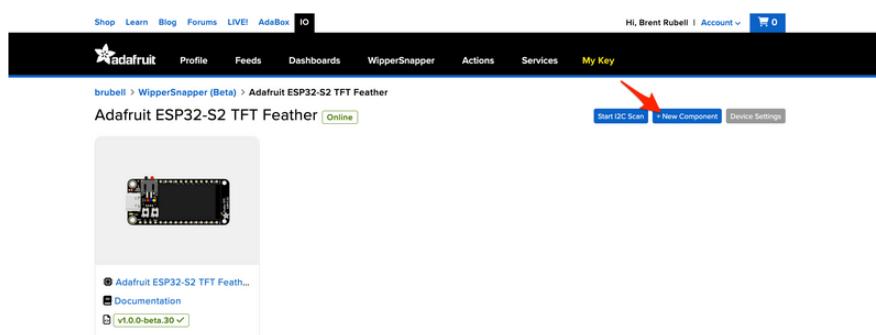

The Component Picker lists all the available components, sensors, and parts that can be used with WipperSnapper.

Under the I2C Components header, click AHT20.

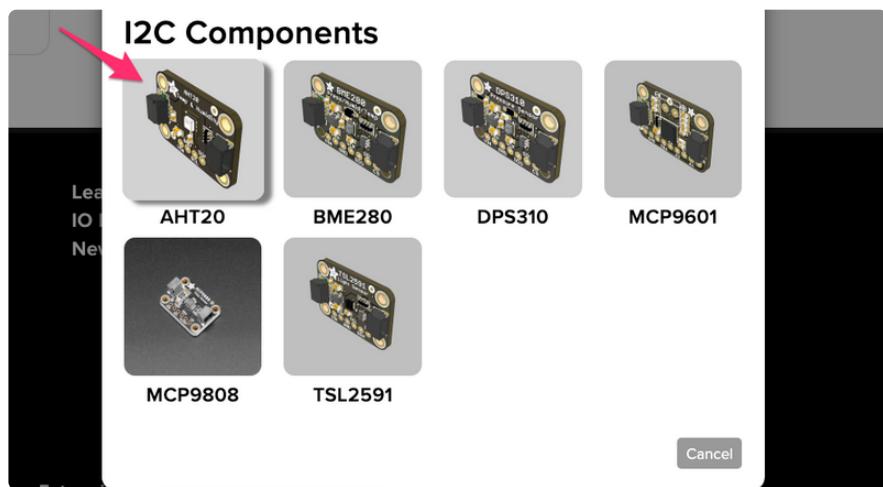


On the component configuration page, the AHT20's I2C sensor address should be listed along with the sensor's settings.

The AHT20 sensor can measure ambient temperature and relative humidity. This page has individual options for reading the temperature and the relative humidity. This comes in handy in the case where you have multiple I2C sensors connected to your Feather which read the same value. You may choose to enable or disable a specific sensor type on this page.


The Send Every option is specific to each sensor measurements . This option will tell the Feather how often it should read from the AHT20 sensor and send the data to Adafruit IO. Measurements can range from every 30 seconds to every 24 hours.

For this example, set the Send Every interval for both seconds to Every 30 seconds and click Create Component.

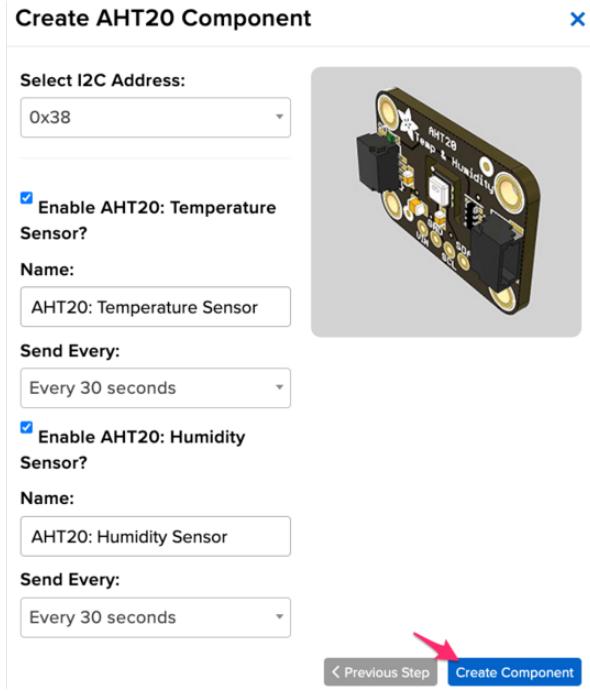

Your device interface should now show the AHT20 component you created.

After the interval you configured elapses, WipperSnapper automatically reads values from the sensor and sends them to Adafruit IO.

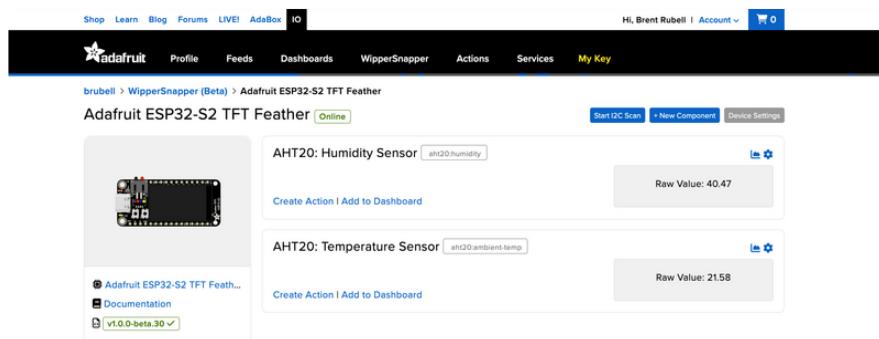

## Going Further

Want to learn more about Adafruit IO WipperSnapper? We have [more complex projects on the Adafruit Learning System](#) (<https://adafru.it/Yyd>).

## Factory Reset

The Adafruit ESP32-S2 TFT Feather microcontroller ships running a diagnostic demo with data shown on the display, and a NeoPixel rainbow swirl. It's lovely, but you probably had other plans for the board. As you start working with your board, you

may want to return to the original code to begin again, or you may find your board gets into a bad state. Either way, this page has you covered.

You're probably used to seeing the FTHRS2BOOT drive when loading CircuitPython or Arduino. The FTHRS2BOOT drive is part of the UF2 bootloader, and allows you to drag and drop files, such as CircuitPython. However, on the ESP32-S2 the UF2 bootloader can become damaged.

## Factory Reset Firmware UF2

If you have a bootloader still installed - which means you can double-click to get the FTHRS2BOOT drive to appear, then you can simply drag this UF2 file over to the BOOT drive.

To enter bootloader mode, plug in the board into a USB cable with data/sync capability. Press the reset button once, wait till the RGB LED turns purple, then press the reset button again. Then drag this file over:

Click to download the TFT Feather factory reset UF2

<https://adafru.it/XTC>

Your board is now back to its factory-shipped state! You can now begin again with your plans for your board.

## Factory Reset and Bootloader Repair

What if you tried double-tapping the reset button, and you still can't get into the UF2 bootloader? Whether your board shipped without the UF2 bootloader, or something damaged it, this section has you covered.

There is no bootloader protection for the UF2 bootloader. That means it is possible to erase or damage the UF2 bootloader, especially if you upload an Arduino sketch to an ESP32-S2 board that doesn't "know" there's a bootloader it should not overwrite!

It turns out, however, the ESP32-S2 comes with a second bootloader: the ROM bootloader. Thanks to the ROM bootloader, you don't have to worry about damaging the UF2 bootloader. The ROM bootloader can never be disabled or erased, so its

always there if you need it! You can simply re-load the UF2 bootloader from the ROM bootloader.

Completing a factory reset will erase your board's firmware which is also used for storing CircuitPython/Arduino/Files! Be sure to back up your data first.

There are two ways to do a factory reset and bootloader repair. The first is using WebSerial through a Chromium-based browser, and the second is using `esptool` via command line. We highly recommend using WebSerial through Chrome/Chromium.

The next section walks you through the prerequisite steps needed for both methods.

## Download .bin and Enter Bootloader

### Step 1. Download the factory-reset-and-bootloader.bin file

Save the following file wherever is convenient for you. You will need to access it from the WebSerial ESPTool.

Note that this file is approximately 3MB. This is not because the bootloader is 3MB, it is because the bootloader is near the end of the available flash. Most of the file is empty but its easier to program if you use a combined file.

Click to download TFT Feather  
factory reset and bootloader .bin

<https://adafru.it/XTD>

### Step 2. Enter ROM bootloader mode

Entering the ROM bootloader is easy. Complete the following steps.

Before you start, make sure your ESP32-S2 is plugged into USB port to your computer using a data/sync cable. Charge-only cables will not work!

To enter the bootloader:

1. Press and hold the BOOT/DFU button down. Don't let go of it yet!

2. Press and release the Reset button. You should still have the BOOT/DFU button pressed while you do this.
3. Now you can release the BOOT/DFU button.

No USB drive will appear when you've entered the ROM bootloader. This is normal!

Now that you've downloaded the .bin file and entered the bootloader, you're ready to continue with the factory reset and bootloader repair process. The next two sections walk you through using WebSerial and [esptool](#).

## The WebSerial ESPTool Method

We highly recommend using WebSerial ESPTool method to perform a factory reset and bootloader repair. However, if you'd rather use esptool via command line, you can skip this section.

This method uses the WebSerial ESPTool through Chrome or a Chromium-based browser. The WebSerial ESPTool was designed to be a web-capable option for programming ESP32-S2 boards. It allows you to erase the contents of the microcontroller and program up to four files at different offsets.


You will have to use a Chromium browser (like Chrome, Opera, Edge...) for this to work, Safari and Firefox, etc. are not supported because we need Web Serial and only Chromium is supporting it to the level needed.

Follow the steps to complete the factory reset.


If you're using Chrome 88 or older, see the Older Versions of Chrome section at the end of this page for instructions on enabling Web Serial.

## Connect

You should have plugged in only the ESP32-S2 that you intend to flash. That way there's no confusion in picking the proper port when it's time!

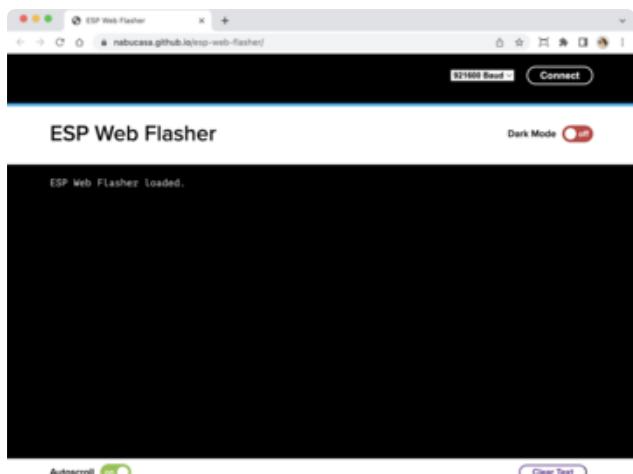

In the Chrome browser visit <https://nabucasa.github.io/esp-web-flasher/> (<https://adafruit.it/ZIE>). You should see something like the image shown.

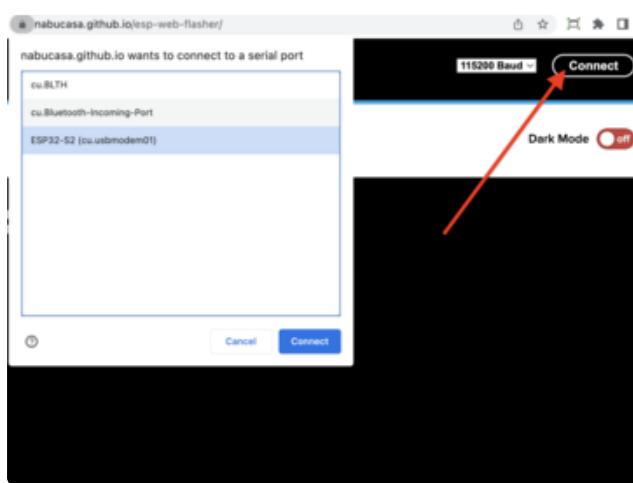


Press the Connect button in the top right of the web browser. You will get a pop up asking you to select the COM or Serial port.

Remember, you should remove all other USB devices so only the ESP32-S2 board is attached, that way there's no confusion over multiple ports!

On some systems, such as MacOS, there may be additional system ports that appear in the list.

```
ESP Web Flasher loaded.  
Connecting...  
Connected successfully.  
Try hard reset.  
Chip type ESP32-S2  
Connected to ESP32-S2  
MAC Address: 7C:DF:A1:06:8D:D0  
Uploading stub...  
Running stub...  
Stub is now running...  
Detecting Flash Size  
FlashId: 0x164020  
Flash Manufacturer: 20  
Flash Device: 4016  
Auto-detected Flash size: 4MB
```


The Javascript code will now try to connect to the ROM bootloader. It may timeout for a bit until it succeeds. On success, you will see that it is Connected and will print out a unique MAC address identifying the board along with other information that was detected.

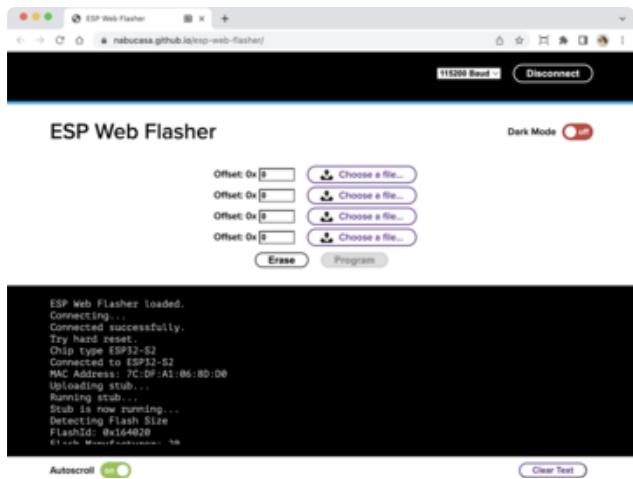

Once you have successfully connected, the command toolbar will appear.

## Erase the Contents

This will erase everything on your board! If you have access, and wish to keep any code, now is the time to ensure you've backed up everything.

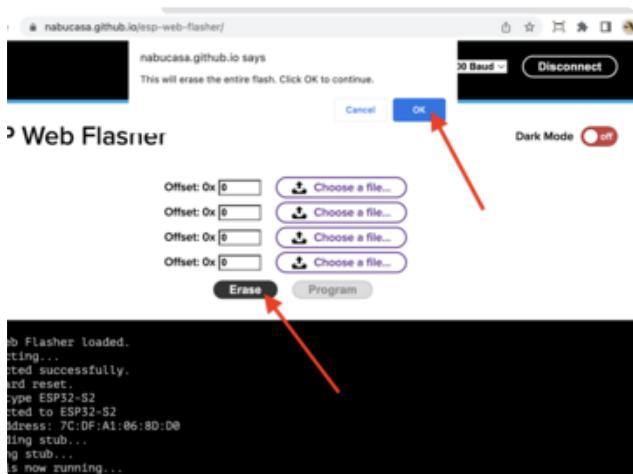

To erase the contents, click the Erase button. You will be prompted whether you want to continue. Click OK to continue or if you changed your mind, just click cancel.

**Erasing flash memory. Please wait...**  
**Finished. Took 15899ms to erase.**


You'll see "Erasing flash memory. Please wait..." This will eventually be followed by "Finished." and the amount of time it took to erase.

Do not disconnect! Immediately continue on to programming the ESP32-S2.

**Do not disconnect after erasing! Immediately continue on to the next step!**


# Program the ESP32-S2

Programming the microcontroller can be done with up to four files at different locations, but with the board-specific factory-reset.bin file, which you should have downloaded under Step 1 on this page, you only need to use one file.

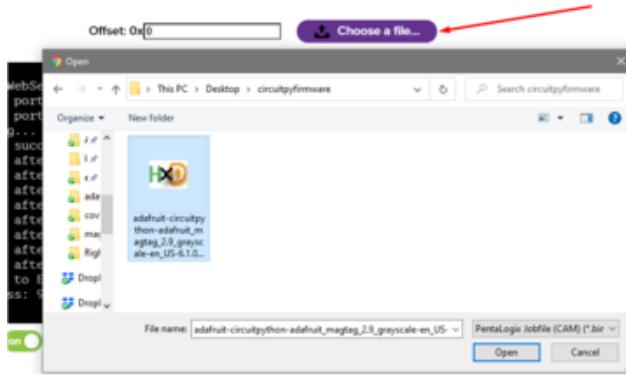


Click on the first Choose a file.... (The tool will only attempt to program buttons with a file and a unique location.) Then, select the \*-factory-reset.bin file you downloaded in Step 1 that matches your board.

Verify that the Offset box next to the file location you used is (0x) 0.

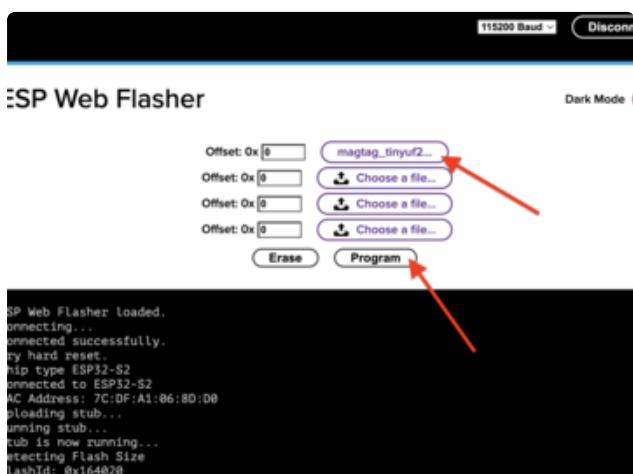

Once you choose a file, the button text will change to match your filename. You can then select the Program button to begin flashing.

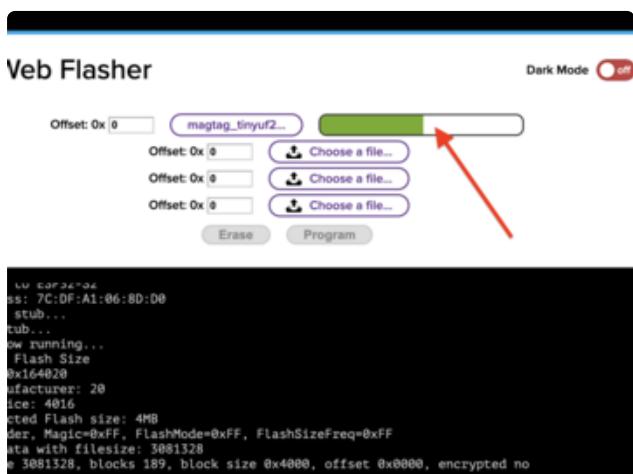

A progress bar will appear and after a minute or two, you will have written the firmware.

Once completed, you can skip down to the section titled Reset the Board.

# The `esptool` Method (for advanced users)

If you used WebSerial ESPTool, you do not need to complete the steps in this section!

Once you have entered ROM bootloader mode, you can then [use Espressif's esptool program](https://adafru.it/E9p) (<https://adafru.it/E9p>) to communicate with the chip! `esptool` is the 'official' programming tool and is the most common/complete way to program an ESP chip.

## Install ESPTool.py

You will need to use the command line / Terminal to install and run `esptool`.

You will also need to have pip and Python installed (any version!).

Install the latest version using pip (you may be able to run `pip` without the `3` depending on your setup):

```
pip3 install --upgrade esptool
```

Then, you can run:

```
esptool.py
```

Make sure you are running esptool v3.0 or higher, which adds ESP32-S2 support.

## Test the Installation

Run `esptool.py` in a new terminal/command line and verify you get something like the below:

```
C:\Users\ladyada>python3 C:\ESP32\esp-idf\components\esptool_py\esptool\esptool.py
esptool.py v3.0-dev
usage: esptool [-h] [--chip {auto,esp8266,esp32,esp32s2}] [--port PORT] [--baud BAUD]
               [--before {default_reset,no_reset,no_reset_no_sync}]
               [--after {hard_reset,soft_reset,no_reset}] [--no-stub] [--trace]
               [--override-vddsdio [{1.8V,1.9V,OFF}]] [--connect-attempts CONNECT_ATTEMPTS]
               {load_ram,dump_mem,read_mem,write_mem,write_flash,run,image_info,make_image,elf2image,read
               _mac,chip_id,flash_id,read_flash_status,write_flash_status,read_flash,verify_flash,erase_flash,erase_regi
               ...
               ...}
```

# Connect

Run the following command, replacing the identifier after `--port` with the `COMxx`, `/dev/cu.usbmodemxx` or `/dev/ttySxx` you found above.

```
esptool.py --port COM88 chip_id
```

You should get a notice that it connected over that port and found an ESP32-S2.

```
C:\Users\ladyada>python3 C:\ESP32\esp-idf\components\esptool_py\esptool\esptool.py --port COM88 chip_id
esptool.py v3.0-dev
Serial port COM88
Connecting...
Detecting chip type... ESP32-S2
Chip is ESP32-S2
Features: WiFi, ADC and temperature sensor calibration in BLK2 of efuse
Crystal is 40MHz
MAC: 7c:df:a1:00:3f:3e
Uploading stub...
Running stub...
Stub running...
Warning: ESP32-S2 has no Chip ID. Reading MAC instead.
MAC: 7c:df:a1:00:3f:3e
Hard resetting via RTS pin...
ERROR: ESP32-S2 chip was placed into download mode using GPIO0.
esptool.py can not exit the download mode over USB. To run the app, reset the chip manually.
To suppress this error, set --after option to 'no_reset'.
```

# Installing the Bootloader

Run this command and replace the serial port name with your matching port and the file you just downloaded

```
esptool.py --port COM88 write_flash 0x0 tinyuf2_combo.bin
```

Don't forget to change the `--port` name to match.

There might be a bit of a 'wait' when programming, where it doesn't seem like it's working. Give it a minute, it has to erase the old flash code which can cause it to seem like it's not running.

You'll finally get an output like this:

```
esptool.py v3.0-dev
Serial port COM88
Connecting...
Detecting chip type... ESP32-S2
Chip is ESP32-S2
Features: WiFi, ADC and temperature sensor calibration in BLK2 of efuse
Crystal is 40MHz
MAC: 7c:df:a1:05:f8:9a
Uploading stub...
Running stub...
Stub running...
Configuring flash size...
Auto-detected Flash size: 4MB
Compressed 3081264 bytes to 98937...
Wrote 3081264 bytes (98937 compressed) at 0x00000000 in 22.8 seconds (effective 1080.0 kbit/s)...
Hash of data verified.

Leaving...
Hard resetting via RTS pin...
ERROR: ESP32-S2 chip was placed into download mode using GPIO0.
esptool.py can not exit the download mode over USB. To run the app, reset the chip manually.
To suppress this error, set --after option to 'no_reset'.
```

Once completed, you can continue to the next section.

## Reset the board

Now that you've reprogrammed the board, you need to reset it to continue. Click the reset button to launch the new firmware.

The display will show colored text including the battery status and I2C port scan results, and the NeoPixel will light up in a rainbow swirl.

You've successfully returned your board to a factory reset state!

## Older Versions of Chrome

As of chrome 89, Web Serial is already enabled, so this step is only necessary on older browsers.

We suggest updating to Chrome 89 or newer, as Web Serial is enabled by default.

If you must continue using an older version of Chrome, follow these steps to enable Web Serial.

Sorry, Web Serial is not supported on this device. make sure you're running Chrome 78 or later and have enabled the #enable-experimental-web-platform-features flag in chrome://flags

If you receive an error like the one shown when you visit the WebSerial ESPTool site, you're likely running an older version of Chrome.

You must be using Chrome 78 or later to use Web Serial.

**WARNING: EXPERIMENTAL FEATURES AHEAD!** By enabling these features, you could lose browser data or compromise your security or privacy. Enabled features apply to all users of this browser.

Interested in cool new Chrome features? Try our [beta channel](#).

The screenshot shows the 'Available' tab selected in the DevTools interface. Under the 'Experimental Web Platform features' section, there is a red box highlighting the first item. The text reads: 'Enables experimental Web Platform features that are in development. – Mac, Windows, Linux, Chrome OS, Android' and has a link '#enable-experimental-web-platform-features'. To the right, a blue button labeled 'Enabled' is shown. Below this, two other items are listed: 'Temporarily unexpire M85 flags.' and 'Temporarily unexpire M86 flags.', each with a 'Default' dropdown menu.

To enable Web Serial in Chrome versions 78 through 88:

Visit `chrome://flags` from within Chrome.  
Find and enable the Experimental Web Platform features  
Restart Chrome

# The Flash an Arduino Sketch Method

This section outlines flashing an Arduino sketch onto your ESP32-S2 board, which automatically installs the UF2 bootloader as well.

## Arduino IDE Setup

If you don't already have the Arduino IDE installed, the first thing you will need to do is to download the latest release of the Arduino IDE. ESP32-S2 requires version 1.8 or higher. Click the link to download the latest.

Arduino IDE Download

<https://adafru.it/Pd5>

After you have downloaded and installed the latest version of Arduino IDE, you will need to start the IDE and navigate to the Preferences menu. You can access it from the File > Preferences menu in Windows or Linux, or the Arduino > Preferences menu on OS X.


The Preferences window will open.

In the Additional Boards Manager URLs field, you'll want to add a new URL. The list of URLs is comma separated, and you will only have to add each URL once. The URLs point to index files that the Board Manager uses to build the list of available & installed boards.

Copy the following URL.

[https://raw.githubusercontent.com/espressif/arduino-esp32/gh-pages/package\\_esp32\\_dev\\_index.json](https://raw.githubusercontent.com/espressif/arduino-esp32/gh-pages/package_esp32_dev_index.json)

Add the URL to the Additional Boards Manager URLs field (highlighted in red below).

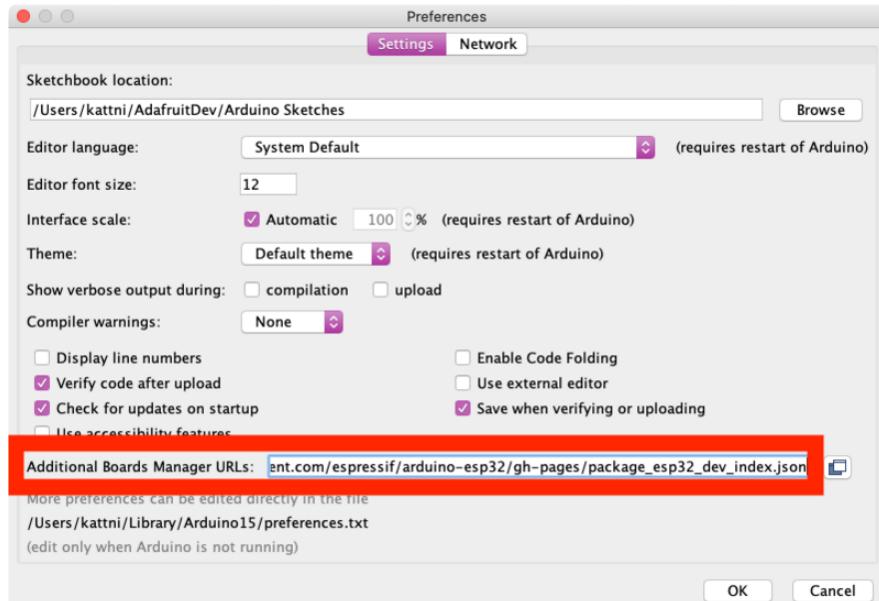

Click OK to save and close Preferences.


In the Tools > Boards menu you should see the ESP32 Arduino menu. In the expanded menu, it should contain the ESP32 boards along with all the latest ESP32-S2 boards.

Now that your IDE is setup, you can continue on to loading the sketch.


## Load the Blink Sketch

In the Tools > Boards menu you should see the ESP32 Arduino menu. In the expanded menu, look for the menu option for the Adafruit Feather ESP32-S2 TFT, and click on it to choose it.

Open the Blink sketch by clicking through File > Examples > 01.Basics > Blink.

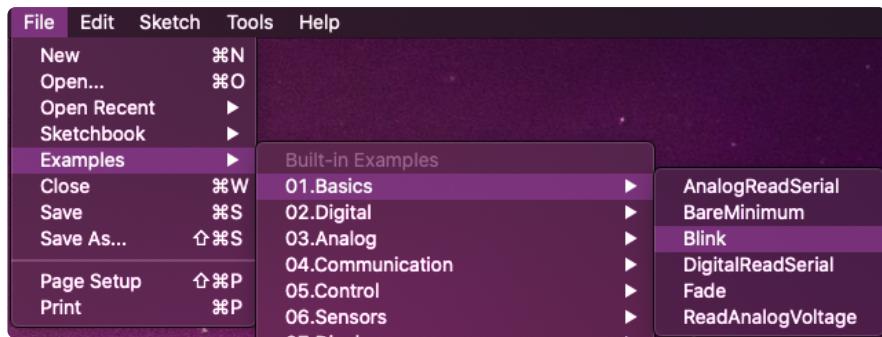

Once open, click Upload from the sketch window.

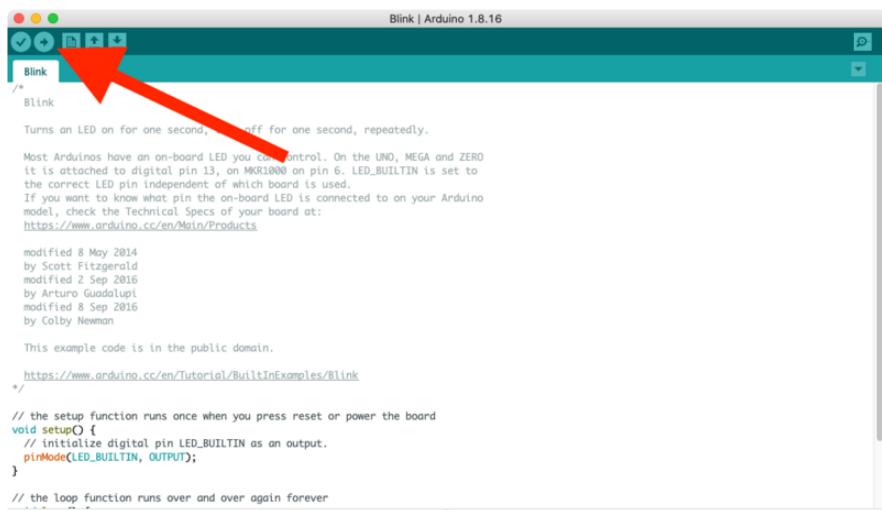

Once successfully uploaded, the little red LED will begin blinking once every second. At that point, you can now enter the bootloader.

## Install UF2 Bootloader

If your board has a UF2 bootloader, you do not need to follow the steps on this page. Try to enter the UF2 bootloader before continuing! Double-tap the reset button to do so.

The Adafruit ESP32-S2 Feather TFT ships with a UF2 bootloader which allows the board to show up as FTHRS2BOOT when you double-tap the reset button, and enables you to drag and drop UF2 files to update the firmware.

On ESP32-S2, there is no bootloader protection for the UF2 bootloader. That means it is possible to erase or damage the UF2 bootloader, especially if you upload an Arduino sketch to an ESP32-S2 board that doesn't "know" there's a bootloader it should not overwrite!

It turns out, however, the ESP32-S2 comes with a second bootloader: the ROM bootloader. Thanks to the ROM bootloader, you don't have to worry about damaging the UF2 bootloader. The ROM bootloader can never be disabled or erased, so it's always there if you need it! You can simply re-load the UF2 bootloader from the ROM bootloader.

If your UF2 bootloader ends up damaged or overwritten, you can follow the steps found in the [Factory Reset and Bootloader Repair](#) (<https://adafru.it/XTE>) section of the Factory Reset page in this guide.

Once completed, you'll return to where the board was when you opened the package. Then you'll be back in business, and able to continue with your existing plans!

---

## Downloads



### Files

- [ESP32-S2 product page with resources](#) (<https://adafru.it/OpE>)
- [ESP32-S2 datasheet](#) (<https://adafru.it/OpF>)
- [ESP32-S2 Technical Reference](#) (<https://adafru.it/Oqb>)
- [EagleCAD PCB files on GitHub](#) (<https://adafru.it/XLB>)
- [3D Models on GitHub](#) (<https://adafru.it/YbB>)
- [Fritzing object in the Adafruit Fritzing Library](#) (<https://adafru.it/XLC>)
- [PrettyPins PDF on GitHub](#) (<https://adafru.it/XLD>)
- [PrettyPins SVG](#) (<https://adafru.it/YAn>)

Factory test source code

<https://adafru.it/YBz>

# Schematic and Fab Print

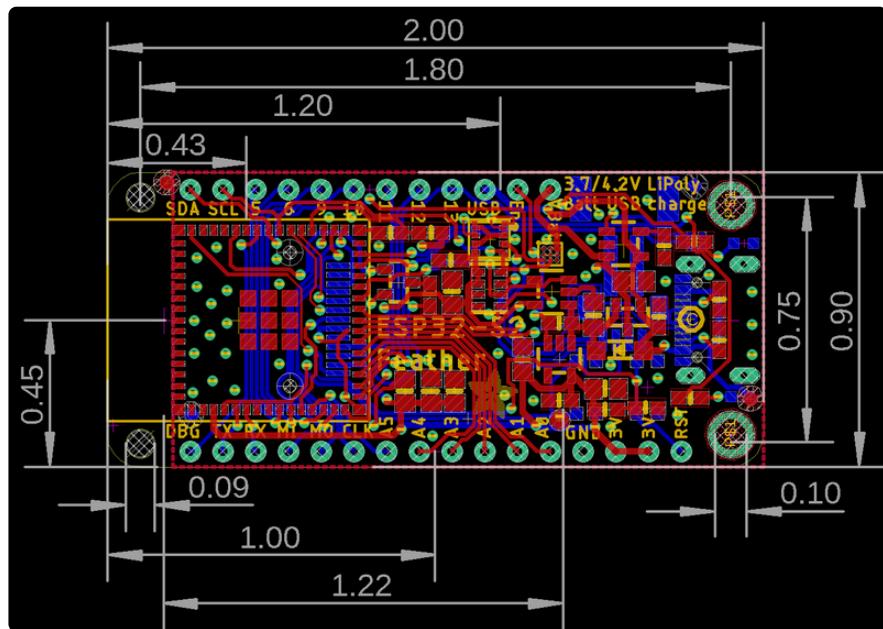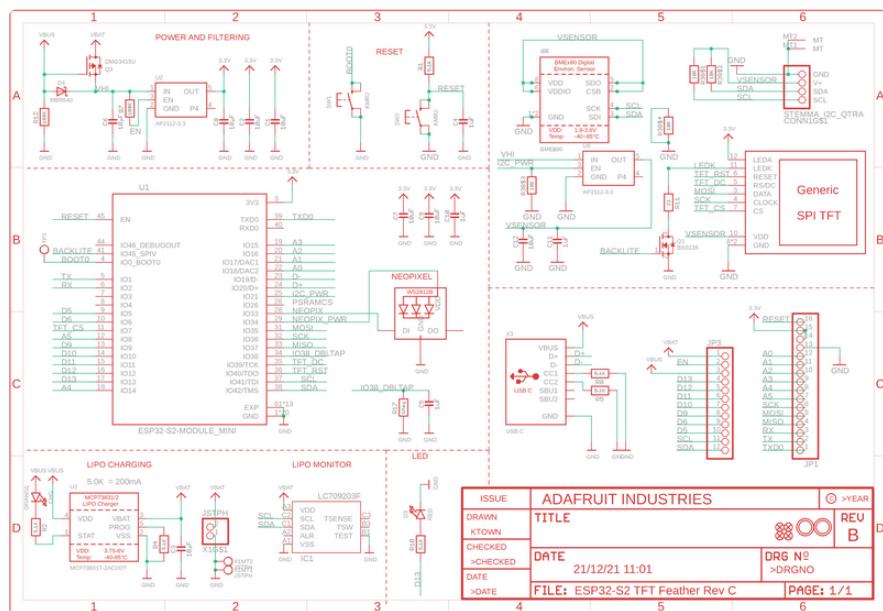

# 3D Model

