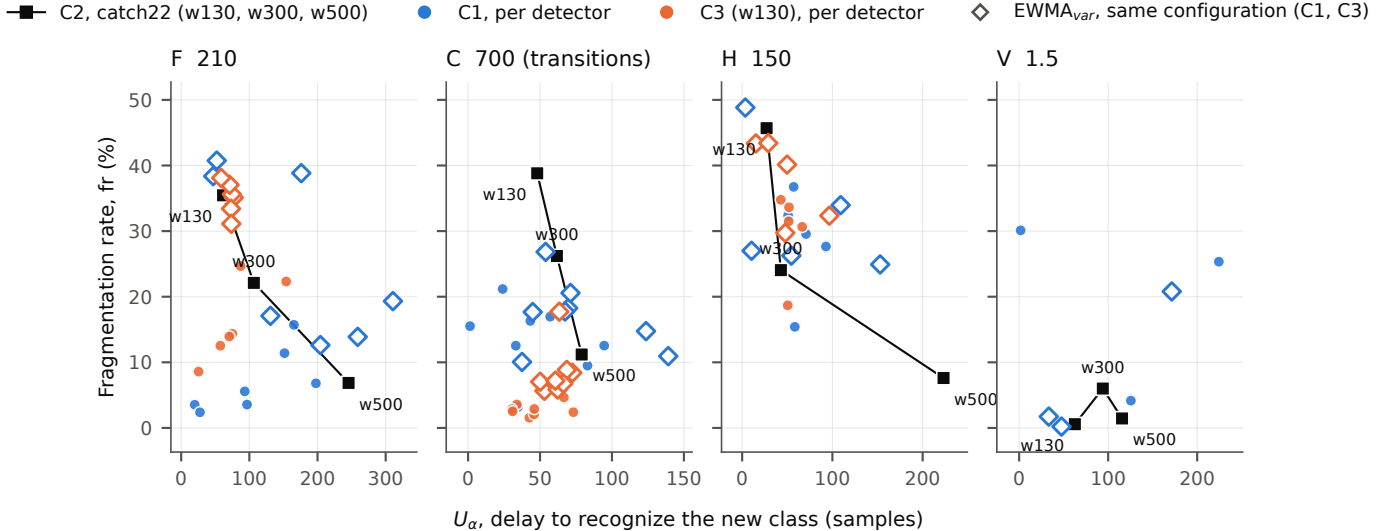
C2, catch22 (w130, w300, w500)
C1, per detector
C3 (w130), per detector
EWMA$_{var}$, same configuration (C1, C3)
F 210
C 700 (transitions)
H 150
V 1.5
Fragmentation rate, fr (%)
U_α, delay to recognize the new class (samples)
w130
w300
w500