
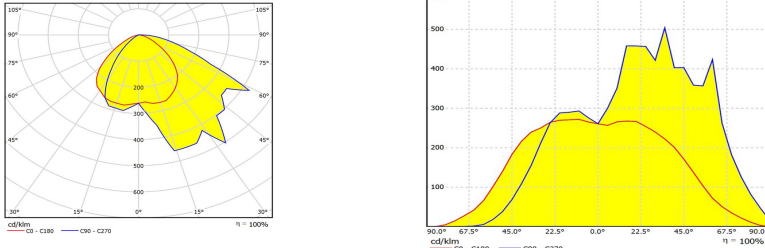


LED Wall Pack		www.lileds.com	
Names		Blazer100-S	
		#S : shield	
Pictures			
Light Source		40 High Power LED @700mA Constant Current (LumiLEDs LXML PWC1) LM-80 listed	
Light Efficiency		70 lm/w	
LED life		50.000 hrs	
Color Temperature		Cool White 5500 K	
Colorimetric index		Ra 66	
Light distribution			
Total flux		7000 lumens per LM-79 test	
PF		> 0.9	
Total Harmonic Distortion(THD)		< 15%	
Total power		100W	
Electric Protections		OVP, SCP, OTP	
Input voltage		120 ~ 277VAC 50/60Hz	
Dimension s	Length	17'' (431MM)	
	Width	9.33'' (237MM)	
	Height	9.06'' (230MM)	
Weight		24.2lbs (11kg)	
UL & cUL		UL/cUL E351013	
DLC		Yes	
Operating temperature		-25 ~ 55°C (-13~ 130°F)	
Operating Humidity		10 ~ 95%	
Weather protection		Suitable for Dry, Damp and Wet locations	
Packaging	s	490*300*315MM	
	PCS per box	1	
	(lb)	22	
Standard Warranty		5 years Limited	