
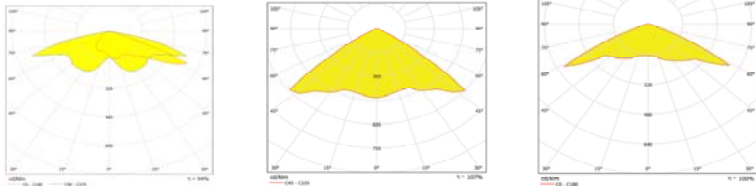


LED Street Light		www.lileds.com	DESIGNLIGHTS CONSORTIUM	UL US	CE	RoHS 2002/95/EC
Names		Cobra I-60H				
Pictures						
Light Source		Imported High Power LED (LumiLEDs Rebelor Rebel ES)				
LED life		>50,000 hrs, tested per LM-80 test method				
Color Temperature		Cool White/Warm White 3700-6500°K				
Colorimetric index		Ra 70~75				
Light distribution		Type I/ Type II/Type III/Type IV/Type V				
						
Total flux		7500 lumens, per LM-79 test method				
PF		>0.9				
Total Harmonic Distortion(THD)		<10%				
Total power		97W				
Light Efficiency		75 lm/w				
Electric Protections		OVP, OCP, SCP, OTP				
Input voltage		90 ~ 277VAC 50/60Hz 480V step down available as an option				
Housing		Die cast, Stainless Steel latches, tool-less access to LED drivers				
Sensor Day/Night		On/off (Bi-level optional)				
Dimensions	Length	27.95 inch (710 mm)				
	Width	12.2 inch (310 mm)				
	Height	10 inch (255 mm)				
Weight		9.3kg				
Packaging		1pcs/Box, box size 710x330x330mm, G.W 9.8Kg				
Attachments		Head of pole or parallel (can be adjust 5°-10°-15°)				
		2~3 inch (60mm)				
UL/cUL		UL/cUL E351013				
DLC		DesignLights Consortium qualified luminaire				
Operating temperature		-25 ~ 55°C (-13~ 130°F)				
Operating Humidity		10 ~ 90%				
Weather protection		Suitable for Dry, Damp and Wet locations				
Packaging	Dimensions	740*330*325MM				
	PCS per box	1				
	G.Weight (lb)	22				
Standard Warranty		5 Years Limited				