

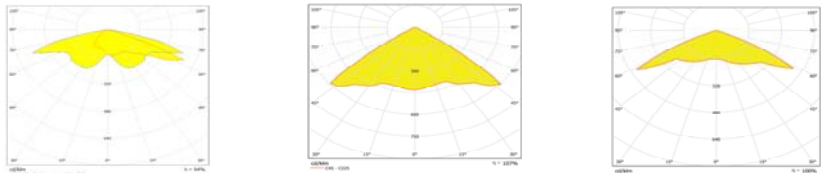


LED Street/Parking Lot Lights		www.lileds.com				
Names		Metro100	Metro150	Metro200	Metro240	
Pictures						
Light Source		Imported High Power LED (LumiLEDs or Nichia)				
LED life		>50.000 hrs, tested per LM-80 test method				
Color Temperature		Cool White/Warm White 3700-6500°K				
Colorimetric index		Ra 70~75				
Light distribution		Type I/ Type II/Type III/Type IV/Type V (Symmetric or Asymmetric)				
						
Total flux		8500 lumens per LM-79 test method	12750 lumens per LM-79 test method	17000 lumens per LM-79 test method	20000 lumens LM-79 test method	per
PF		>0.9				
Total Harmonic		<10%				
Total power		100w	150w	200w	240W	
Light Efficiency		85 lm/w				
Electric Protections		OVP, OCP, SCP, OTP				
Input voltage		90 ~ 277VAC 50/60Hz 480V step down available as an option				
Housing		Extruded Aluminum, Temped Glass				
Sensor Day/Night		On/off Optional, Bi-level optional				
Dimensions	Length	23.5 Inch (598 mm)			31.5 Inch (800 mm)	
	Width	14.17 Inch (360 mm)			26 Inch (660mm)	
	Height	3.54 Inch (90 mm)				
Weight		26.5 lb (12 kg)			44 lb (20 kg)	
Attachments		Head of pole or parallel (can be adjust 0° to 90°)				
		2~3 inch (60mm)				
Certification		UL Pending, CE, RoHS				
DLC		Pending				
Operating temperature		-40 ~ 50°C (-40~ 122°F)				
Operating Humidity		10 ~ 90%				
Weather protection		Suitable for Wet Locations				
Standard Warranty		5 Years Limited				