




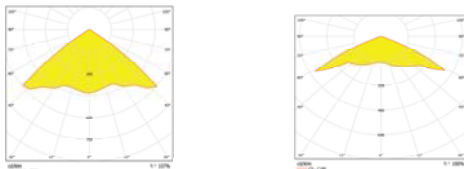


LED Canopy Lights		www.lileds.com	   
Names		Atlas GS30H	
Pictures			
Light Source		30 High Power LED @525mA Constant Current (LumiLEDs Rebel), LM-80 listed	
LED life		>50,000 hrs	
Color Temperature		COOL White 5300-6500° K (other colors on request)	
Colorimetric index		Ra70~75	
Light distribution		Type IV, Type V	
			
Total flux		4520 lumens, per LM-79 test method	
PF		0.98	
Total Harmonic Distortion(THD)		9.10%	
Total power		60W	
Light Efficiency		75 lm/w	
Lux		75 lux @ 14 feet high	
Electric Protections		OVP, OCP, SCP, OTP	
Input voltage		90 ~ 277VAC 50/60Hz (480V step down optional)	
Dimensions	Length	9.29 inch (236 mm)	
	Width	11.8inch (300 mm)	
	Height	3.98 inch (101 mm)	
Weight		9.7 lb (4.4 kg)	
Installation		Surface mounting	
UL/cUL		UL,cUL E351013	
Operating temperature		-25 ~ 55°C (-13~ 130°F)	
Operating Humidity		10 ~ 95%	
Weather protection		Suitable for Dry and Damp locations	
Packaging	Dimensions	410*305*165MM	
	PCS per box	1	
	G.Weight (lb)	9.46	
Standard Warranty		5 Years Limited	