



— MODEL — **WC-1**

Waste Cone



- Available for Onshore and Offshore Applications
- Manufactured in Accordance with NFPA 20 Requirements
- Designed for use with UL/FM Approved Fire Pump Pressure Relief Valves

Optional Materials for Seawater and Severe Service Applications:


- Nickel Aluminum Bronze (NAB) - ASTM B148 Alloy C95800
- Monel - QQ-N-288 Comp B - ASTM A494 Grade M30H
- Cast Steel - ASTM A216 Grade WCB
- 316 Stainless Steel - ASTM A743 Grades CF3M and CFM8
- Super Austenitic Stainless Steel - ASTM A351 Grade CK3MCuN (SMO 254)
- Super Duplex Stainless Steel - ASTM A890 Grade 5A (CE3MN)

Standards:

- Fusion Bonded Red Epoxy Coated
- Ductile Iron - ASTM A536-65
- (2) 2" 316 SS Sight Glasses per WC-1
- Single Body Casting (No Welding)


Flanges

- 150# Class (FF Standard)
- 300# Class (RF Standard)
- Raised Face and Flat Faced Options

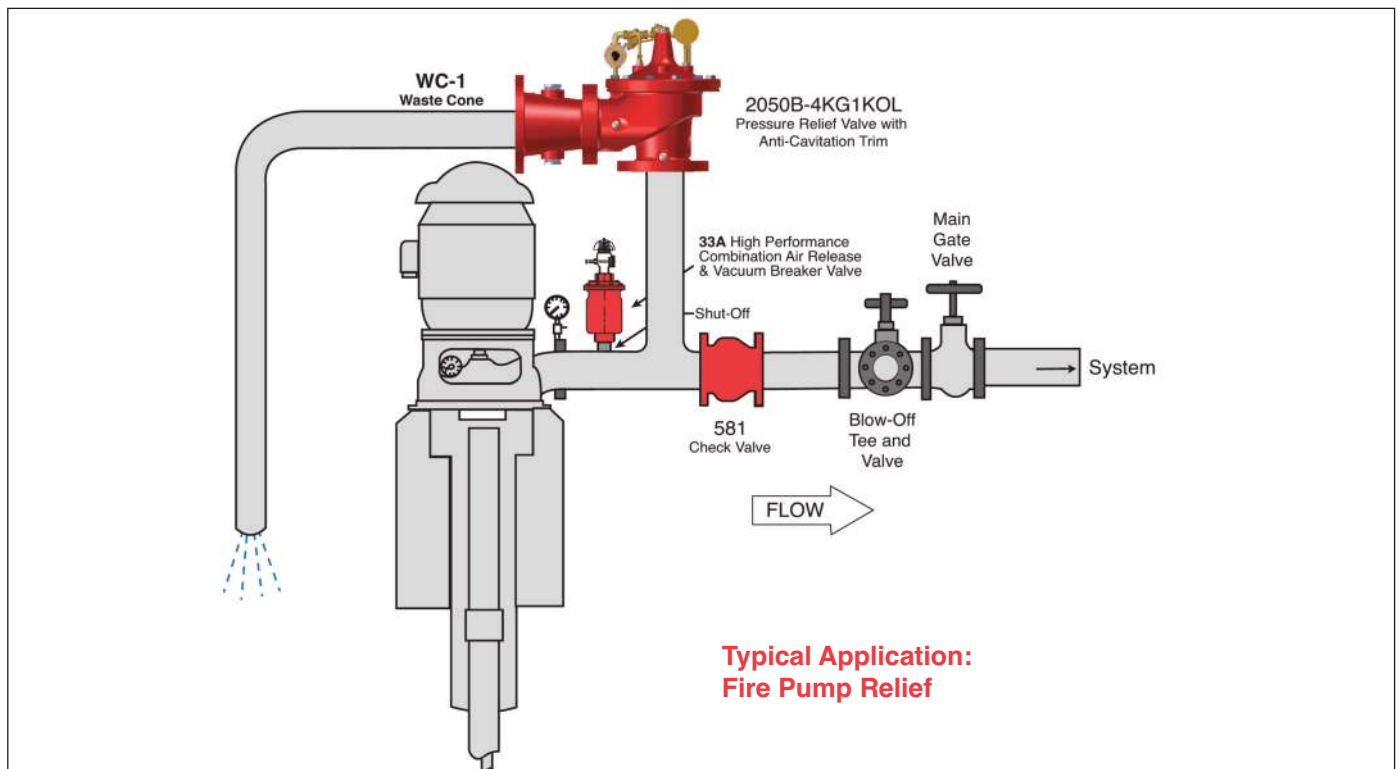

WC-1

Technical Data & Dimensions

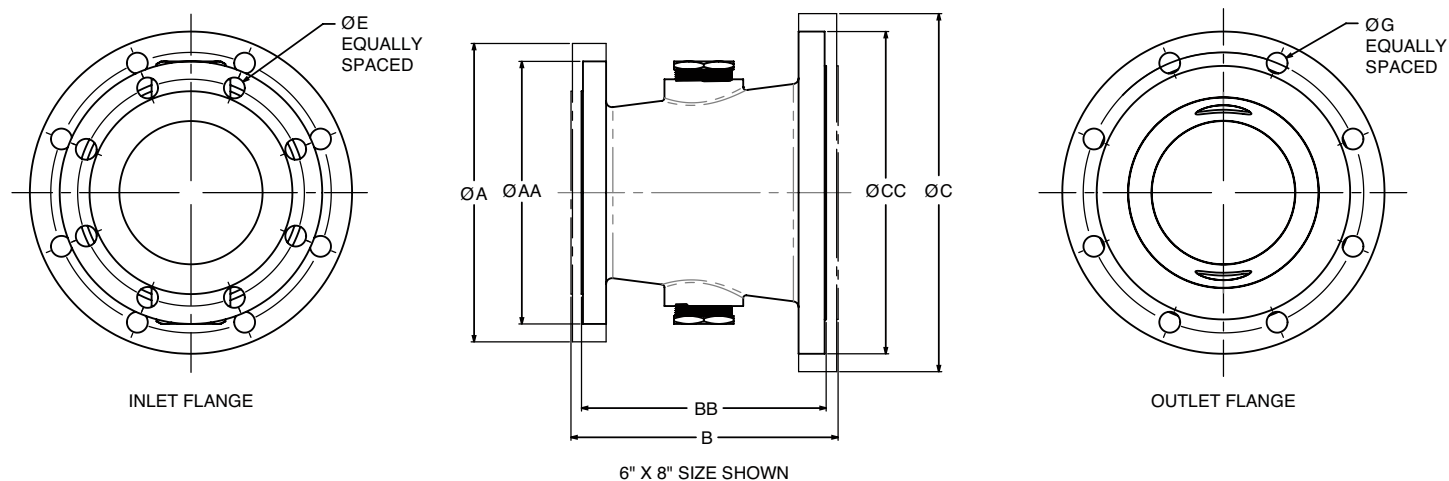

SIZE INLET X OUTLET	PUMP GPM	PRESSURE CLASS	ØA	ØAA	B	BB	ØC	ØCC	ØE	NUMBER OF HOLES (INLET)	DIAMETER OF BOLTS (INLET)	ØG	NUMBER OF HOLES (OUTLET)	DIAMETER OF BOLTS (OUTLET)	WEIGHT (IN LBS.)
3" X 5"	0 - 450	150LB	—	7.50	—	8.25	—	10.00	.750	4	.625	.875	8	.750	34
		300LB	8.25	—	9.24	—	11.00	—	.875	8	.750	.875	8	.750	53
3" X 6"	450 - 500	150LB	—	7.50	—	9.00	—	11.00	.750	4	.625	.875	8	.750	41
		300LB	8.25	—	9.69	—	12.50	—	.875	8	.750	.875	12	.750	63
4" X 6"	500 - 750	150LB	—	9.00	—	9.00	—	11.00	.750	8	.625	.875	8	.750	43
		300LB	10.00	—	9.75	—	12.50	—	.875	8	.750	.875	12	.750	70
4" X 8"	750 - 1000	150LB	—	9.00	—	10.25	—	13.50	.750	8	.625	.875	8	.750	62
		300LB	10.00	—	11.06	—	15.00	—	.875	8	.750	1.000	12	.875	99
6" X 8"	1000 - 1500	150LB	—	11.00	—	10.25	—	13.50	.875	8	.750	.875	8	.750	67
		300LB	12.50	—	11.19	—	15.00	—	.875	12	.750	1.000	12	.875	110
6" X 10"	1500 - 2500	150LB	—	11.00	—	11.50	—	16.00	.875	8	.750	1.000	12	.875	94
		300LB	12.50	—	12.63	—	17.50	—	.875	12	.750	1.125	16	1.000	150
8" X 12"	2500 - 3500	150LB	—	13.50	—	13.00	—	19.00	.875	8	.750	1.000	12	.875	138
		300LB	15.00	—	14.25	—	20.50	—	1.000	12	.875	1.250	16	1.125	207
8" X 14"	3500 - 5000	150LB	—	13.50	—	14.00	—	21.00	.875	8	.750	1.125	12	1.000	173
		300LB	15.00	—	15.25	—	23.00	—	1.000	12	.875	1.250	20	1.125	255

Visit www.cla-val.com to learn
more about Cla-Val Fire
Protection Products



E-WC-1 (R-03/2019)

CLA-VAL

1701 Placentia Avenue • Costa Mesa CA 92627

800-942-6326 • Fax: 949-548-5441 • Web Site: cla-val.com • E-mail: info@cla-val.com

CLA-VAL CANADA
4687 Christie Drive
Beamsville, Ontario
Canada L0R 1B4
Phone: 905-563-4963
E-mail: sales@cla-val.ca

CLA-VAL EUROPE
Chemin des Mésanges 1
CH-1032 Romanel/
Lausanne, Switzerland
Phone: 41-21-643-15-55
E-mail: cla-val@cla-val.ch

CLA-VAL UK
Dainton House, Goods Station Road
Tunbridge Wells
Kent TN11 2 DH England
Phone: 44-1892-514-400
E-mail: info@cla-val.co.uk

CLA-VAL FRANCE
Porte du Grand Lyon 1
ZAC du Champ du Périer
France - 01700 Neyron
Phone: 33-4-72-25-92-93
E-mail: cla-val@cla-val.fr

CLA-VAL PACIFIC
45 Kennaway Road
Woolston, Christchurch, 8023
New Zealand
Phone: 64-39644860
www.cla-valpacific.com
E-mail: info@cla-valpacific.com