



Firestop Composite Sheet CFS-COS

Applications


- For use with large wall and floor fire-rated assemblies.
- Compatible with hilti speed sleeve and gangplate for floor gang application
- Intumescent sheet with #304 stainless steel backing for firestopping large openings

Advantages


- For use with fire-rated assemblies (up to 4 hrs)
- Compatible with Hilti sleeve devices for easy cable management
- Can be fastened using Hilti GX/BX tools - no need to drill or set anchors
- Multi-board systems allow very large openings
- Non-magnetic #304 stainless steel construction ensures good weatherability and no inductive loss in cables
- Fast installation system requires fewer anchors

Installation instructions

- See Hilti Literature or third-party listings for complete application and installation details

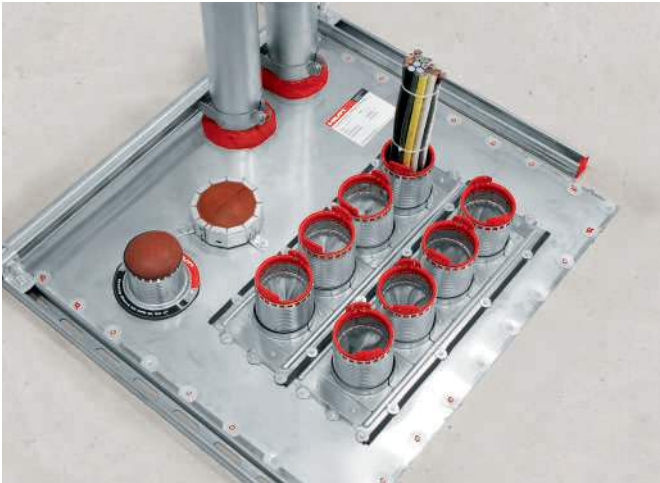

Technical data	CP653
Application temperature range	-22 to 118 °F
Temperature resistance range	-22 to 118 °F
Expansion ratio (unrestricted, up to)	1:18
Surface burning characteristics UL 723 (ASTM E84)	Flame spread: 5 Smoke development: 20
Shelf life1)	Not relevant
Storage and transportation temperature range	-22 to 118 °F
Color	Silver
Acoustics performance	Test report available
Dimensions (LxWxH)	36 x 36 x 0.15in
Intumescent	Yes
Tested in accordance with	UL 1479 ASTM E 814 CAN/ULC-S115 UL 2043 ASTM G-21



1) at 770F/250C and 50% relative humidity; from date of manufacture

