

BRONZE BUTTERFLY VALVES, GROOVED

MODEL: SDBB-G

TECHNICAL SPECIFICATION

Size	2" Through 2 ½"
Working Pressure	175 psi
Max. Test Pressure	350 psi
Working Temperature	250° F (120° C)



Factory Installed UL Approved Tamper Switch for indoor use only.

MATERIAL

Body	Brass, Bronze
Disc	Brass, Ductile Iron, EPDM Encapsulated
Stem	Stainless Steel



Dimension (SCH 40, C=120)

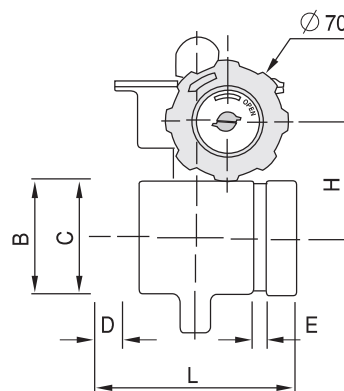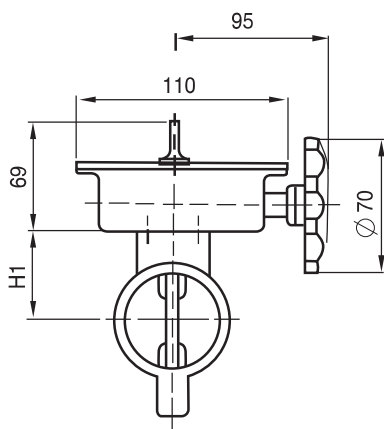

Size	L	H	H1	A	B	C	D	E	Weight Kg (lbs)
2"	114	65	50	---	60.3	57.1	15.8	7.9	2.2
2 ½"	114	65	50	---	73.0	69.0	15.8	7.9	2.4

Unit : mm

BRONZE BUTTERFLY VALVES, THREADED

MODEL: SDBB-T



TECHNICAL SPECIFICATION

Size	1" Through 2 ½"
Working Pressure	175 psi
Max. Test Pressure	350 psi
Working Temperature	250° F (120° C)



Factory Installed UL Approved Tamper Switch for indoor use only.

MATERIAL

Body	Brass, Bronze
Disc	Brass, Ductile Iron, EPDM Encapsulated
Stem	Stainless Steel



Dimension (SCH 40, C=120)

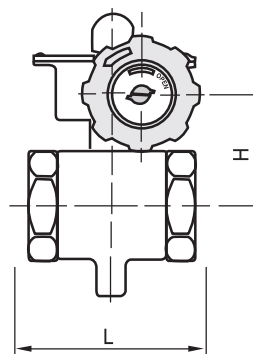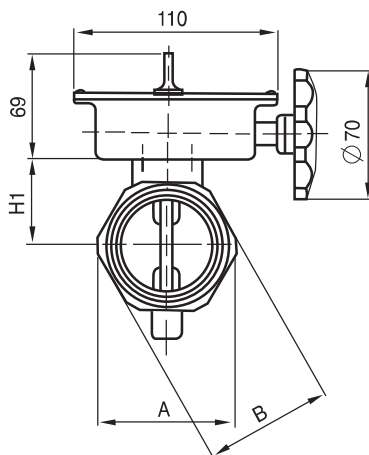

Size	L	H	H1	A	B	C	D	E	Weight Kg (lbs)
1"	54	52	37	43.7	39.7	54	---	---	1.5
1 ¼"	67	56	41	53.2	49	67	---	---	1.7
1 ½"	73	59	44	58.5	56	73	---	---	1.8
2"	82.4	64	49	76	70	82.4	---	---	2.4
2 ½"	104	65	50	84	84	104	---	---	3.1

Unit : mm

BUTTERFLY VALVES, GROOVED

MODEL: SDBV-G

TECHNICAL SPECIFICATION

Size	2 ½" through 8"
Working Pressure	175 psi
Max. Test Pressure	350 psi
Working Temperature	250° F (120° C)



Factory Installed UL Approved Tamper Switch for indoor use only.

MATERIAL

Body	Ductile Iron, Nylon - 11 Coated
Disc	Al-Bronze, Ductile Iron, EPDM Encapsulated
Stem	Stainless Steel



Dimensions

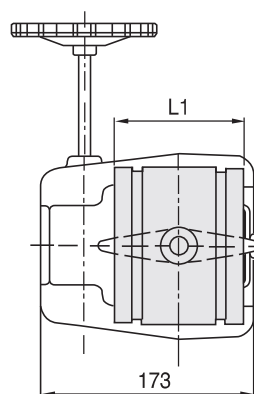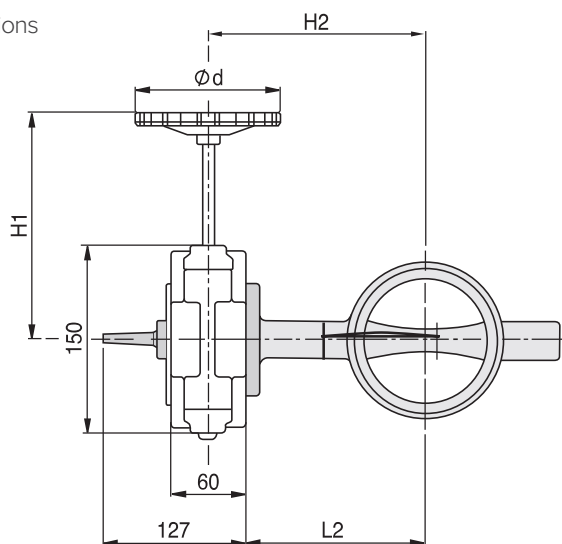

Size	Pipe O.D	L1	L2	H1	H2	d	Weight Kg (lbs)
2 ½"	73	96.4	105	135	135	125	8.2
3"	88.9	96.4	112	135	142	125	9.0
4"	114.3	115.4	145	135	175	125	10.7
6"	168.3	132.4	179	193	209	225	15.2
8"	219.1	147.4	204	193	234	225	20.4

Unit : mm