

Other Heaters

Coil Heaters : We supply Heaters with profile 2.2 X 4.2 where 2.2 mm is the thickness & 4.2 is width of the Heaters this comes with standard Teflon leads, inbuilt J Type TC, 900 mm Black FIB Sleeve & Ground Wire.

Ceramic Band Heater : Used to heat cylindrical surfaces and are available in several construction styles to perform under different operating environments. The element winding is designed to heat the ceramic blocks to the point at which they radiate energy into the barrel as well as conduct energy by being in contact with the barrel - fit



Mica Band Heater : Used to heat cylindrical surfaces and are available in several construction styles to perform under different operating environments. Heater design is a reliable mica insulated band heater that can perform at the higher operating temperatures providing long, efficient service for high productivity of plastic extruders, injection and blow molding machines.

About Us

We Swiftheat Thermal Technologies Private Limited are manufacturing all type of Temperature sensors and Cartridge heaters and have a vision to provide solution for industrial applications and also support with the suitable products as per the customer demand with the competitive price. SWIFTHEAT has the production plant in Peenya 1st Stage, Bangalore and producing high quality Products, oriented by customer demands and specifications.

Starting with a wide stock range via simple standard Sensing elements up to customer-specific developments SWIFTHEAT offers the right solution.

Motivated and qualified employees take care that SWIFTHEAT stands for proximity to customers, innovation, competence, and reliability not only today but also in the future.

SWIFTHEAT is a team characterized by high professional ethics & efficient services for its clients.

Our products are used in:


- Injection moulding : nozzle heating
- Hot runner systems : Manifolds
- Packaging industry : packaging jaws and hotstamps
- Laboratories : Heating of analytical equipment
- Extrusion Machines
- Plastic processing machines
- Automotive industries : Rubber moulding
- Food Industry : Form Fill Seal machines
- Pharma : Tablet packaging

For Immediate Enquires, Please contact:

Swiftheat Thermal Technologies Pvt Ltd

B-132 3rd Cross, E Main, Peenya 1st Stage
Peenya Industrial Area, Bangalore- 560058
Phone No. 9980517570 / 9008027141

E-mail: rekha@swiftheat.in / sales@swiftheat.in
www.swiftheat.in

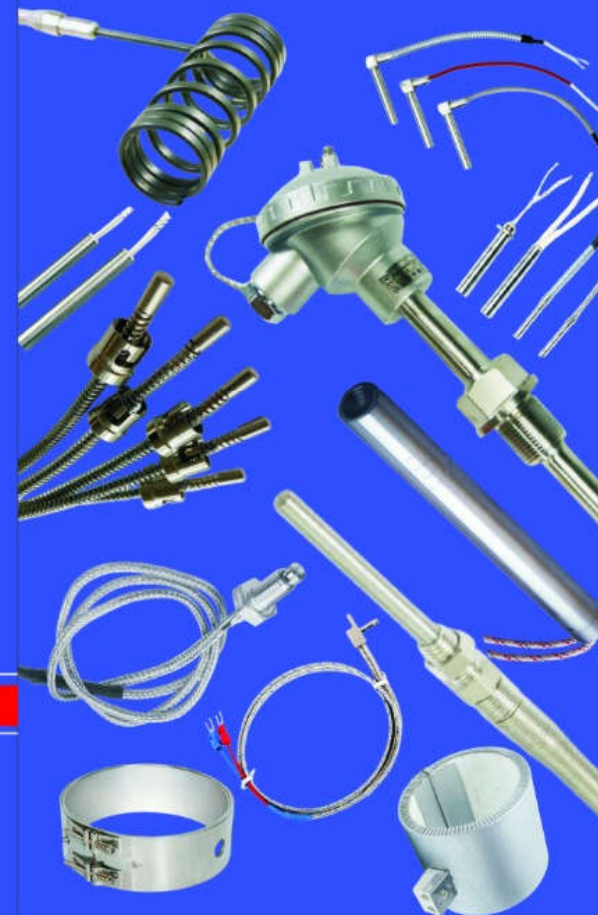
Heating elements & Thermosensors

Cartridge Heaters


Cartridge heaters / Pencil heaters are commonly used in the heating process industry. Cartridge heaters are used to heat a block / Jaw from the inside and can be custom manufactured to a specific watt density based on the requirements of the application.



The wide range of dimensional specifications in which our High Watt Density Cartridge Heater (Straight Type) are manufactured which varies from nominal diameter of 6.35 mm to 25.4 mm. This heater will be equipped with a layer of Mgo insulation for fast heat transfer can be customized with wattage distribution for packaging Industry.

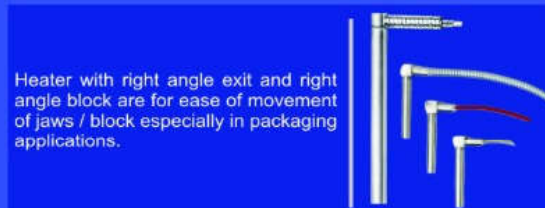

Heater with right angle exit and right angle block are for ease of movement of jaws / block especially in packaging applications.



Immersion type cartridge heaters can be customized with various thread types such as BSP / NPT or with various flanges for better fitment as per requirement.

- All heaters can be customized with various lead types such as fibreglass / Teflon / Silicon insulation.
- All heaters can be customized with various lead protections such as fibre glass sleeve / braided metal sleeve / armour / spring
- All heaters can be customized with various accessories such as right angle exit / right angle block / flanges / NPT bush / BSP bush etc., as per requirement

Thermocouple & Sensors

A thermocouple / Sensor is a device for measuring temperature. They can be made to be robust, fast responding and to measure a very wide temperature range.

We Manufacture & Supply various thermocouple types : TYPE J, TYPE K, TYPE N, TYPE T, TYPE E, TYPE R, TYPE S, TYPE B, TYPE C



Washer Types – We manufacture Washer TC, OD 8mm to 16mm ID suitable for M3 to M10 Bolt. Washer thickness 3mm to 6mm.

Lug type - We manufacture Lug TC, OD 8mm to 20mm, ID suitable for M3 to M12 Bolt. Lug thickness 0.5mm to 3mm.



Bolt type-Fixed/Rotational- We manufacture standard size thread Thermocouple & RTD Sensor both in fixed and rotational types. bolt size can be as per requirement



Spring movable types / Spring Loaded types
We manufacture TC/Sensor with different Bayonet ID size varying from 11mm to 18mm, single slotted / double slotted, suitable for standard adaptor of spring length 100mm to 1000mm



Mineral Insulated TC - Diameter ranges from 2mm to 8mm suitable for high temperature. Can be customized with bulk head / Compression fittings / NPT Bush / BSP Bush / Connectors

Thermocouple & Sensors

Manifold type TC:- Commonly know as TEF-68 Model with tip length 12mm and 11mm and the diameter 4mm suitable for application



Compression Fittings : Different types of fittings can be accommodated along with mineral insulated / other thermocouple types as per requirement.

Thermocouple Connectors : Different types of Connectors can be Supplied along with thermocouple / Sensors as per requirement to transmit temperature readings from thermocouple / sensors



Lead Types :-

- Teflon insulation withstands maximum of 270°C continuous operating temperature.
- Fiberglass insulation withstands maximum of 450°C continuous operating temperature.
- Ceramic insulation withstands maximum of 900-1000°C continuous operating temperature.
- Mineral insulated RTD and thermocouple withstands maximum of 1200-1400°C continuous temperature.

Please Note :-

- We perform 100% calibration and will provide the certificate as per customer requirement.
- We provide Class-1 accuracy for thermocouple and Class-A accuracy for RTD sensors
- We provide PVC Pin type, Round lug type and fork type terminals.