




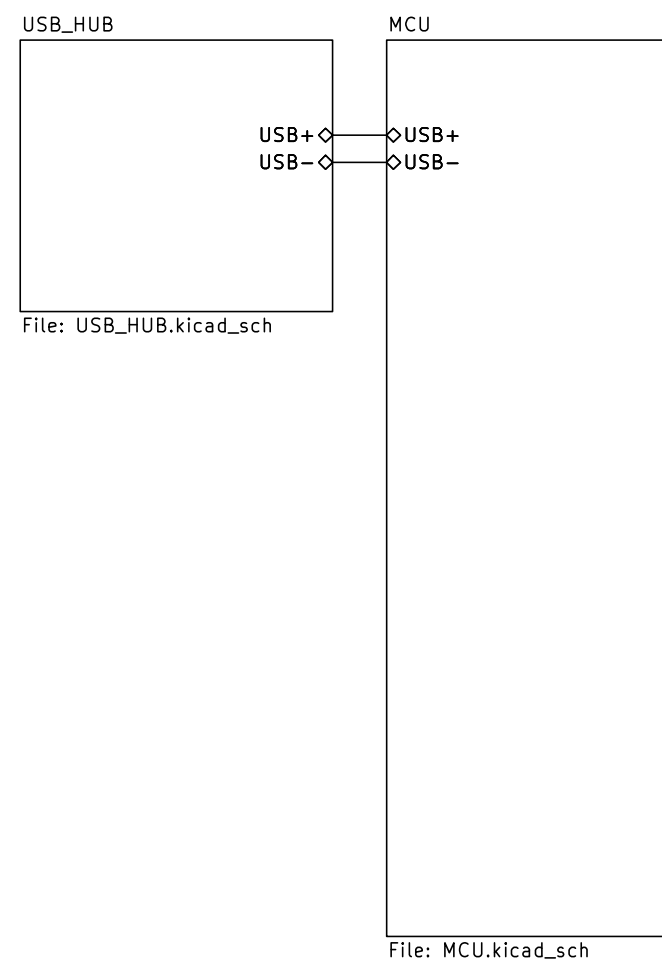


GPIO

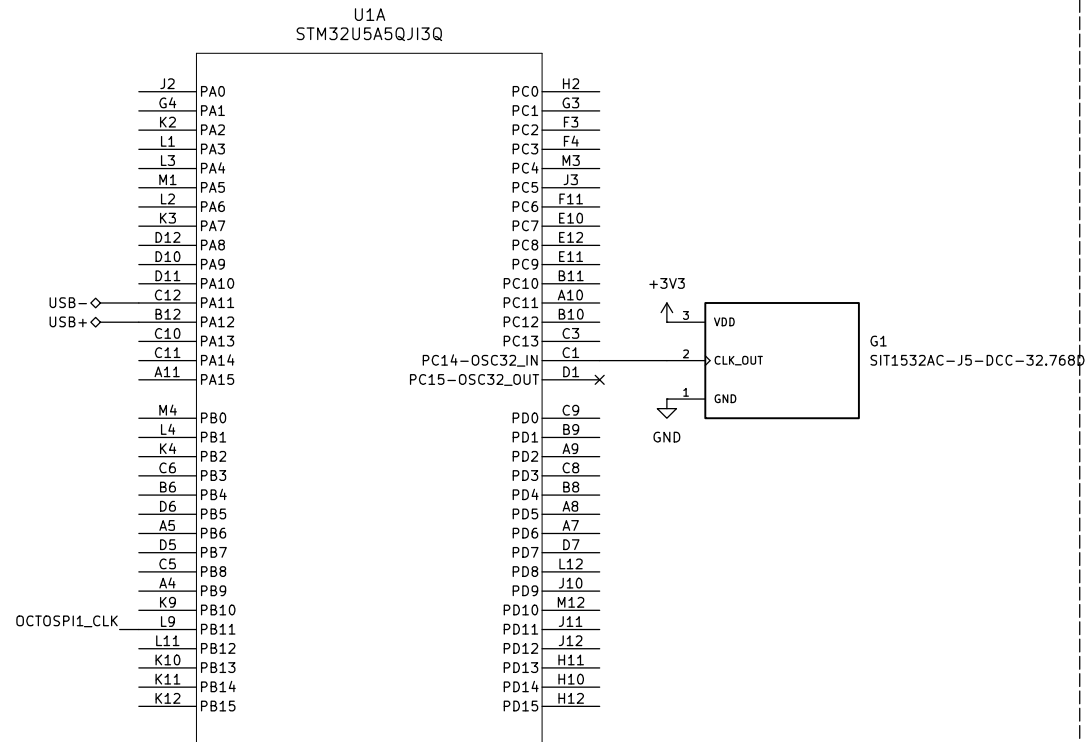

Power

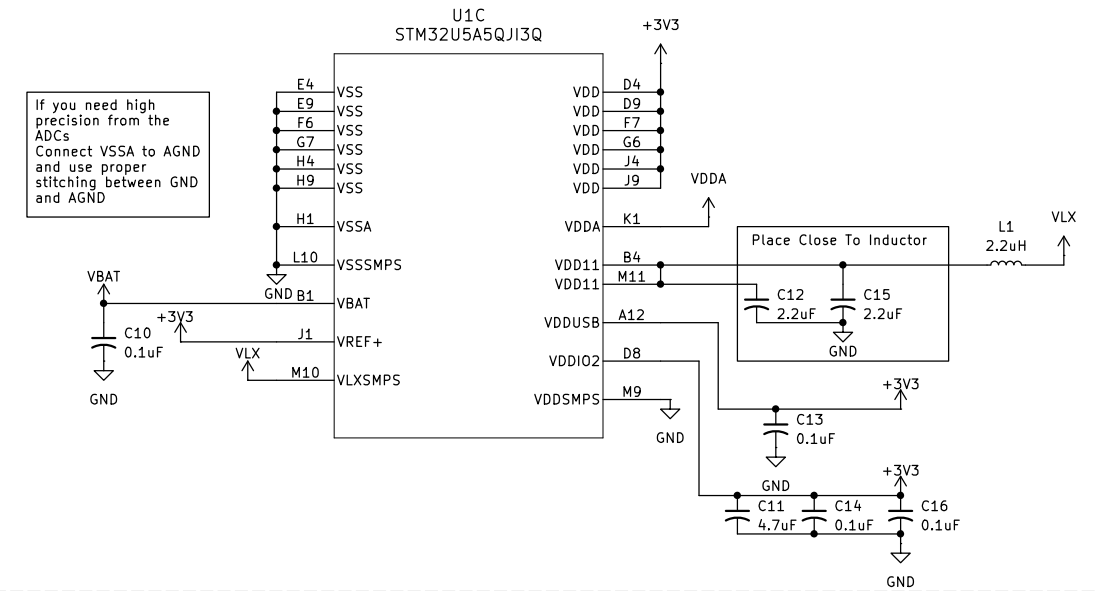



OCTOSPI Flash

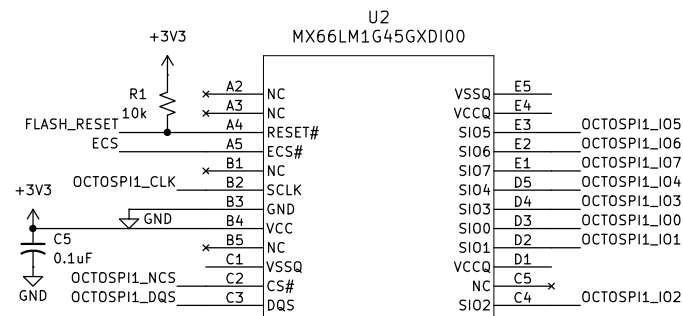

Keeping the data lines (I00-I07) on the same physical port (Port E) ensures the internal silicon routing and GPIO toggle timings are as closely matched as possible. Route DQS exactly like a data line. Match the lengths of I0[0:7], CLK, and DQS to within $\pm 2\text{mm}$ of each other to prevent timing skew during high-frequency operations. Ensure all 11 signals are routed over a continuous, unbroken ground plane on the adjacent layer to provide a clean return path and maintain the target single-ended impedance (typically 50 Ω).


ECS pin will report an error corrected signal, used to log flash degradation
Reset should generally not be externally toggled by the MCU but in the event of a hard reset or crash it can prove useful

GPIO + CLK + RESET

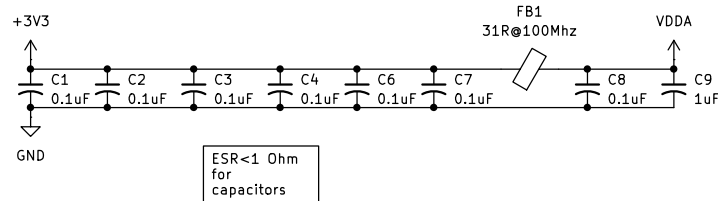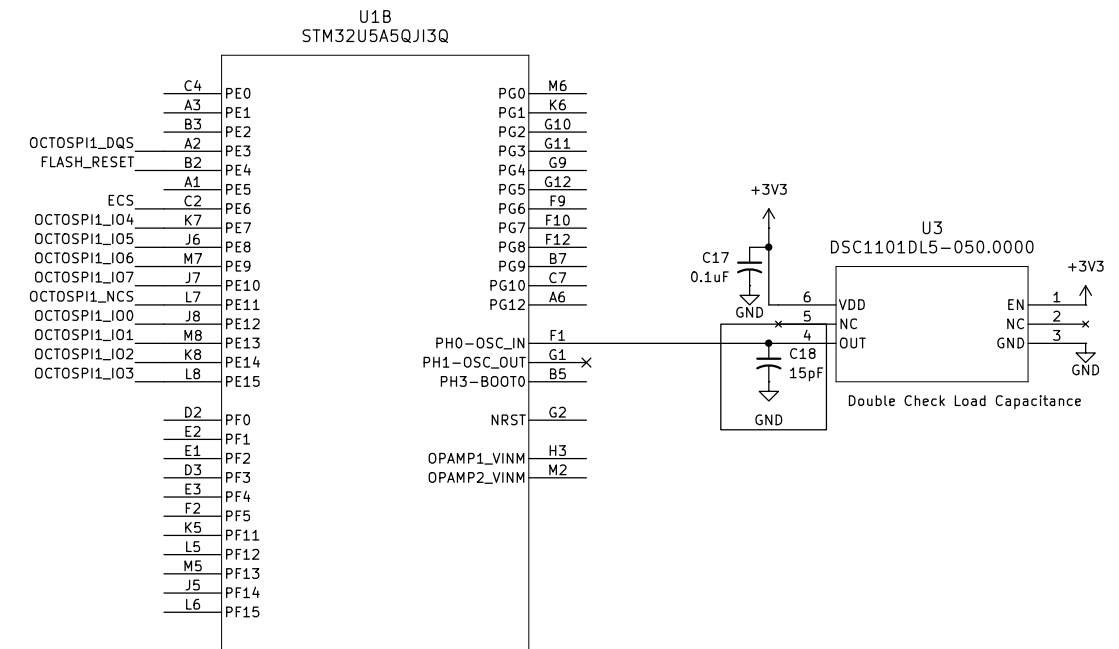

Power Supply Decoupling

Donot believe the datasheet
This setup has been validated and works.



Standard USB 2.0 Spec routing