


Design Changes from V1.00
- Add 33R series line resistor for the SDOUT_return.
- Reduce coupling capacitor pin pitch to 8.2".
- Add 2nd set of FIL resistors to accommodate fitting two VFD.
- Add FIL direct to the 3rd pin for access to FIL1.
- NOTE: The PCB mounting holes have moved!

Vbb, BLANK, GND, SDOUT FIL2 CLK, STROBE, SDOIN, Vcc

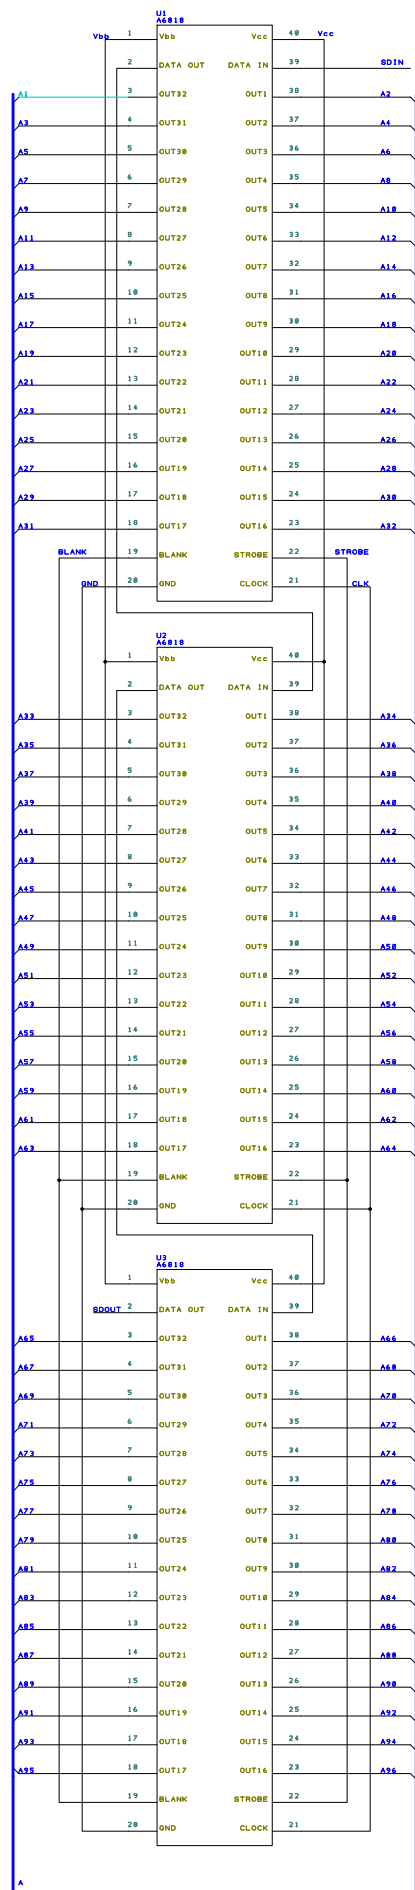

A