


Figure 6: Secure Channel Latency and Memory Footprint

(a) Secure Channel Handshake
(RPI4B loopback, 100 Mbit/s, n=100)



(b) Memory Footprint — STM32F446RE
(128KB total SRAM)

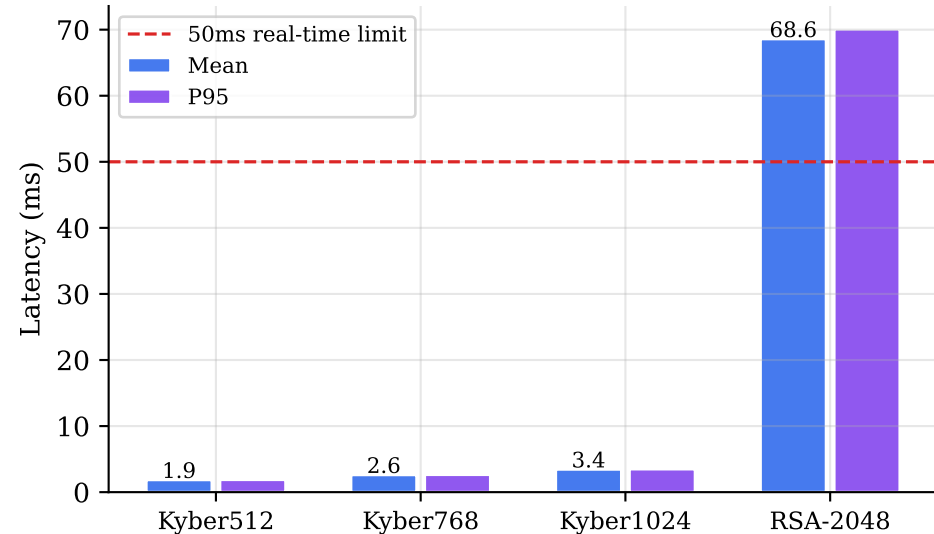