SIA "GRAVITIS ENTERPRISE LIMITED"
Lauku iela 7 - 4, Cēsis, LV-4101, Latvia

Technical Drawing Package

Solar Eclipse Plastic Glasses (EGP-FIT-TDP)

Document Title:	Technical Drawing Package
Product	Solar eclipse glassses. Model: EGP-FIT-TDP
Document No.:	EGP-FIT-TDP-001
Revision:	A
Date:	5/2/2026
Status:	FOR NOTIFIED BODY SUBMISSION

	Name	Signature	Date
Drawn By:	Māris Grāvītis	Māris Grāvītis	13/3/2026
Checked By:	Māris Grāvītis	Māris Grāvītis	13/3/2026
Approved By:	Māris Grāvītis	Māris Grāvītis	13/3/2026

CONFIDENTIAL AND PROPRIETARY: This document contains information belonging to GRAVITIS ENTERPRISE LIMITED. It may not be copied, reproduced, or disclosed without prior written consent.

Table of Contents

Revision History....2
Fabrication Specification (EGP-FIT-FAB-001)....3
SPECIFICATION DATA....3
MANUFACTURING & QUALITY NOTES....4

Revision History

Revision	Description Of Changes	Date	Approved By
A	Initial Release	05/02/2026	Māris Grāvītis

CONFIDENTIAL AND PROPRIETARY: This document contains information belonging to GRAVITIS ENTERPRISE LIMITED. It may not be copied, reproduced, or disclosed without prior written consent.

Fabrication Specification (EGP-FIT-FAB-001)

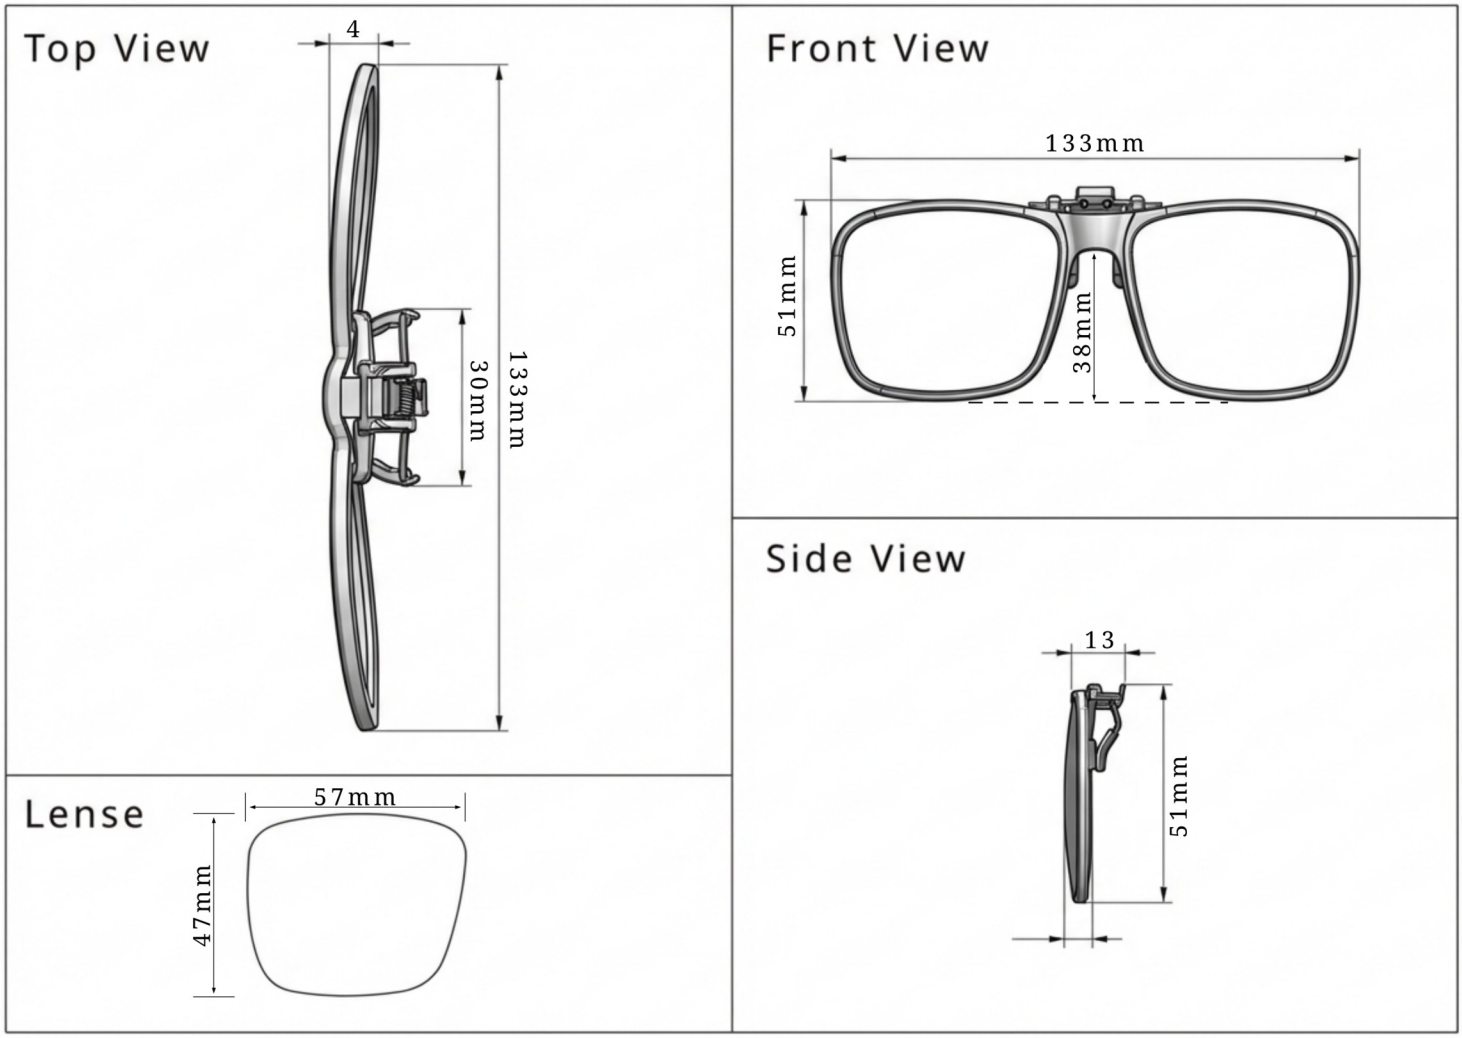

Specification Data

Parameter	Specification
Product Model	EGP-CLP (Solar Clip-On)
Standard	**EN ISO 12312-2:2015** (PPE Category II)
Filter Material	Silver-Black Polymer (0.12mm nominal)
Mechanism	Spring-loaded Bridge with Flip-Up Hinge
Hardware Material	Alloy Spring / ABS Plastic Clamp / Soft Rubber Tips
Optical Density	OD ≥ 5.0 (Transmittance ≤ 0.0032%)
Weight	~18g (Nominal)

CONFIDENTIAL AND PROPRIETARY: This document contains information belonging to GRAVITIS ENTERPRISE LIMITED. It may not be copied, reproduced, or disclosed without prior written consent.

MANUFACTURING & QUALITY NOTES

1. MECHANICAL SAFETY & INTEGRITY:

- **Clip Tension:** The spring mechanism must provide sufficient tension to securely grip standard prescription frames without slipping, but must not be so tight as to damage the user's eyewear.
- **Hinge Friction:** The flip-up hinge must hold position. It must not fall down (blocking vision unexpectedly) or flop up (exposing eyes to sun) under normal head movement.
- **Protective Tips:** The clamp arms must be capped with soft non-marring material (Rubber/Silicone) to prevent scratching the user's prescription lenses.

2. OPTICAL SAFETY:

- **Filter Quality:** Filter surface must be free from pinholes, scratches, or delamination.
- **Coverage:** When clipped to standard frames, the filter must fully cover the optical zone of the underlying lenses.

3. MARKING & TRACEABILITY:

- **Exemption from Direct Marking:** Due to the wire-frame construction and lack of viable surface area (>5mm) on the clip mechanism, **no regulatory markings are applied to the product.**
- **Compliance:** All mandatory markings (CE, Notified Body 0068, ISO 12312-2, Manufacturer Address) are applied to the **Primary Packaging** and **Instructions for Use**. (See Document: PKG-EGP-CLP-001).

CONFIDENTIAL AND PROPRIETARY: This document contains information belonging to GRAVITIS ENTERPRISE LIMITED. It may not be copied, reproduced, or disclosed without prior written consent.