

APPLICATIONS / MARKETS













C

RoHS

SPECIFICATIONS

Electrical Rating: 3A, 125/250VAC

Mechanical Life: 1,000,000 cycles (momentary); 500,000

cycles (latching)

Electrical Life: 50,000 Cycles Contact Resistance: $50m\Omega$

Insulation Resistance: 1000 MΩ @ 500VDC

Dielectric Strength: 2,000VAC

Operating/Storage Temperature: -20°C to 55°C

Travel: 3.2mm

Moisture Protection: IP67

Contact Arrangement: SPDT or DPDT Actuation Force: SPDT: 2.5N; DPDT: 3.5N,

Molded Back: SPDT & DPDT: 5.5N Panel Thickness: 1-10mm Hex Nut Torque: 5-14Nm


Mechanical Impact Protection: IK08

Agency Approvals: cURus

FEATURES & BENEFITS

- 19mm diameter panel cutout
- Dot or ring or power illumination options available
- Multiple switch functions available
- Multiple illumination voltage options
- IP67 rated
- SPDT or DPDT
- UL Certified
- · Custom graphics available
- · Soldered wire leads (300mm long) optional
- · Detachable socket w/ wire leads (500mm long) optional
- Molded back w/ wire leads (500mm long) optional


PART NUMBER CONFIGURATOR

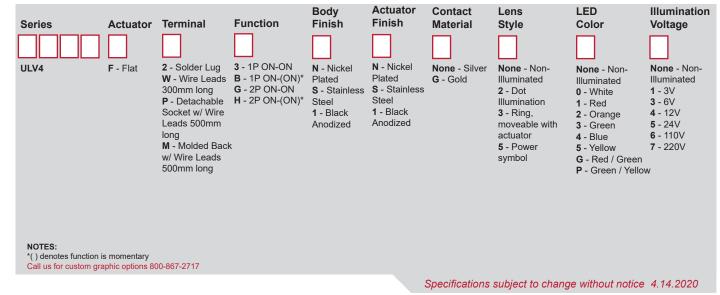







BODY DIMENSIONS -SPDT

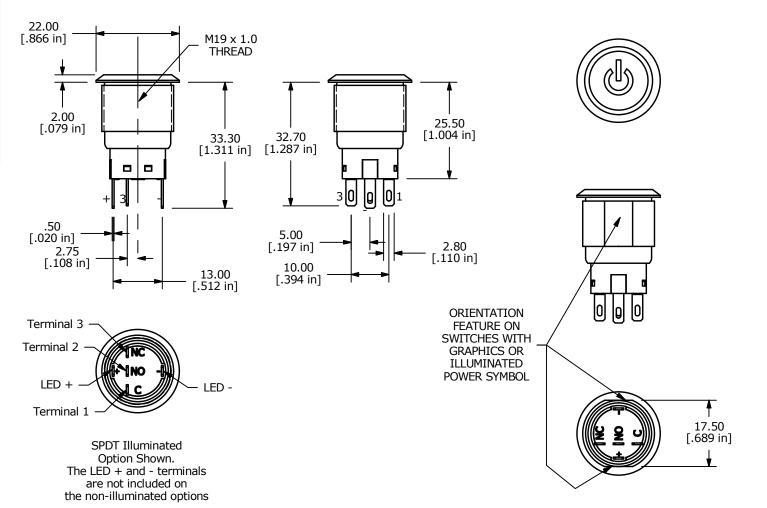




SPDT SWITCH DIMENSIONS

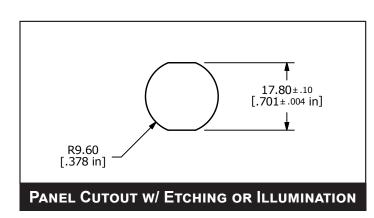



GRAPHIC OPTIONS

Body Dimensions -DPDT

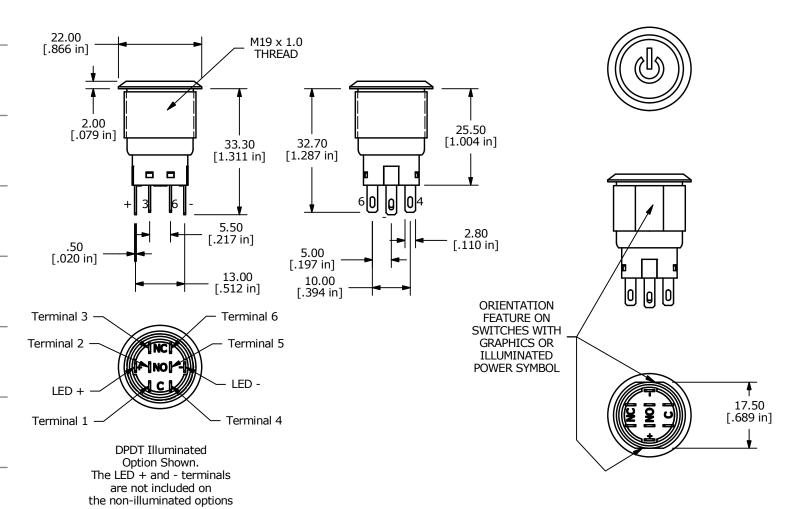


DPDT SWITCH DIMENSIONS







GRAPHIC OPTIONS

SCHEMATICS

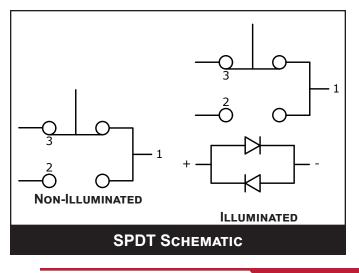

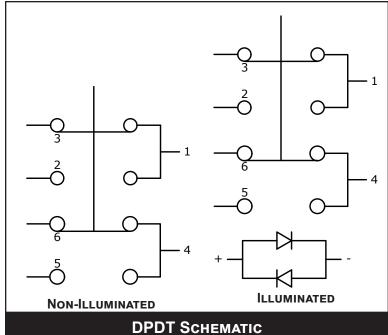


ACUATOR OPTIONS




Ø22.00 [.866 in] Ø15.50 [.61 in] Ø13.00 [.51 in]

RING ILLUMINATED



DOT ILLUMINATED



POWER SYMBOL




WIRE OPTIONS

W - Wire Leads 300mm long

SWITCH	WIRE	LENGTH
SWITCH	WIRE	LENGIH
SW1-1	WIRE, 24AWG AWM UL1015, BLUE	300.0 [11.8 in]
SW1-2	WIRE, 24AWG AWM UL1015, PURPLE	300.0 [11.8 in]
SW1-3	WIRE, 24AWG AWM UL1015, GREEN	300.0 [11.8 in]
SW1-4	WIRE, 24AWG AWM UL1015, WHITE	300.0 [11.8 in]
SW1-5	WIRE, 24AWG AWM UL1015, ORANGE	300.0 [11.8 in]
SW1-6	WIRE, 24AWG AWM UL1015, YELLOW	300.0 [11.8 in]
SW1- (-)	WIRE, 24AWG AWM UL1015, BLACK	300.0 [11.8 in]
SW1- (+)	WIRE, 24AWG AWM UL1015, RED	300.0 [11.8 in]


^{**} WIRE LEADS PROVIDED ARE DEPENDANT ON THE FUNCTION SELECTED **

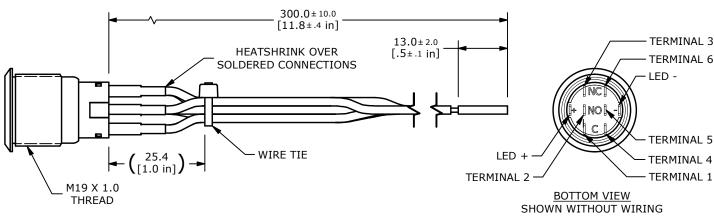

M - Molded Back w/ Wire Leads 500mm long

SWITCH	WIRE	LENGTH
SW1-1	WIRE, 18 AWG AWM UL3385, GREEN	500.0 [19.7 in]
SW1-2	WIRE, 18 AWG AWM UL3385, PURPLE	500.0 [19.7 in]
SW1-3	WIRE, 18 AWG AWM UL3385, YELLOW	500.0 [19.7 in]
SW1-4	WIRE, 18 AWG AWM UL3385, GREEN	500.0 [19.7 in]
SW1-5	WIRE, 18 AWG AWM UL3385, PURPLE	500.0 [19.7 in]
SW1-6	WIRE, 18 AWG AWM UL3385, YELLOW	500.0 [19.7 in]
SW1- (-)	WIRE, 18 AWG AWM UL3385, BLACK	500.0 [19.7 in]
SW1- (+)	WIRE, 18 AWG AWM UL3385, RED	500.0 [19.7 in]

^{**} WIRE LEADS PROVIDED ARE DEPENDANT ON THE FUNCTION SELECTED **

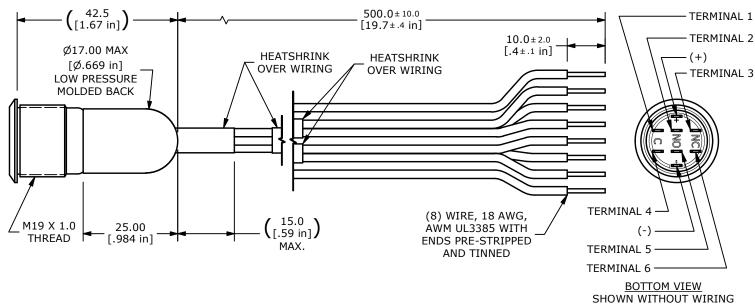


WIRE OPTIONS

P - Detachable Socket w/ Wire Leads 500mm long

SWITCH	WIRE	LENGTH
SW1-1	WIRE, 18 AWG AWM UL3385, GREEN	500.0 [19.7 in]
SW1-2	WIRE, 18 AWG AWM UL3385, PURPLE	500.0 [19.7 in]
SW1-3	WIRE, 18 AWG AWM UL3385, YELLOW	500.0 [19.7 in]
SW1-4	WIRE, 18 AWG AWM UL3385, GREEN	500.0 [19.7 in]
SW1-5	WIRE, 18 AWG AWM UL3385, PURPLE	500.0 [19.7 in]
SW1-6	WIRE, 18 AWG AWM UL3385, YELLOW	500.0 [19.7 in]
SW1- (-)	WIRE, 18 AWG AWM UL3385, BLACK	500.0 [19.7 in]
SW1- (+)	WIRE, 18 AWG AWM UL3385, RED	500.0 [19.7 in]

** WIRE LEADS PROVIDED ARE DEPENDANT ON THE FUNCTION SELECTED **

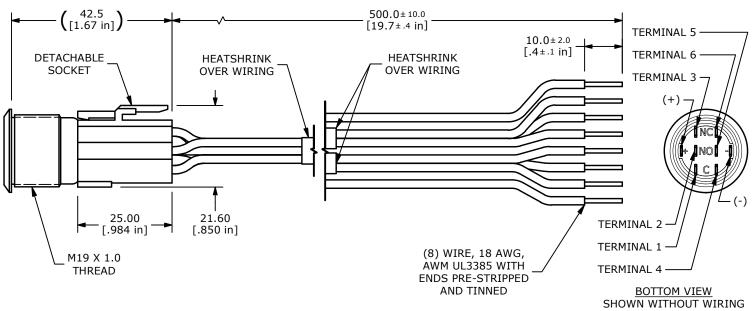

www.e-switch.com