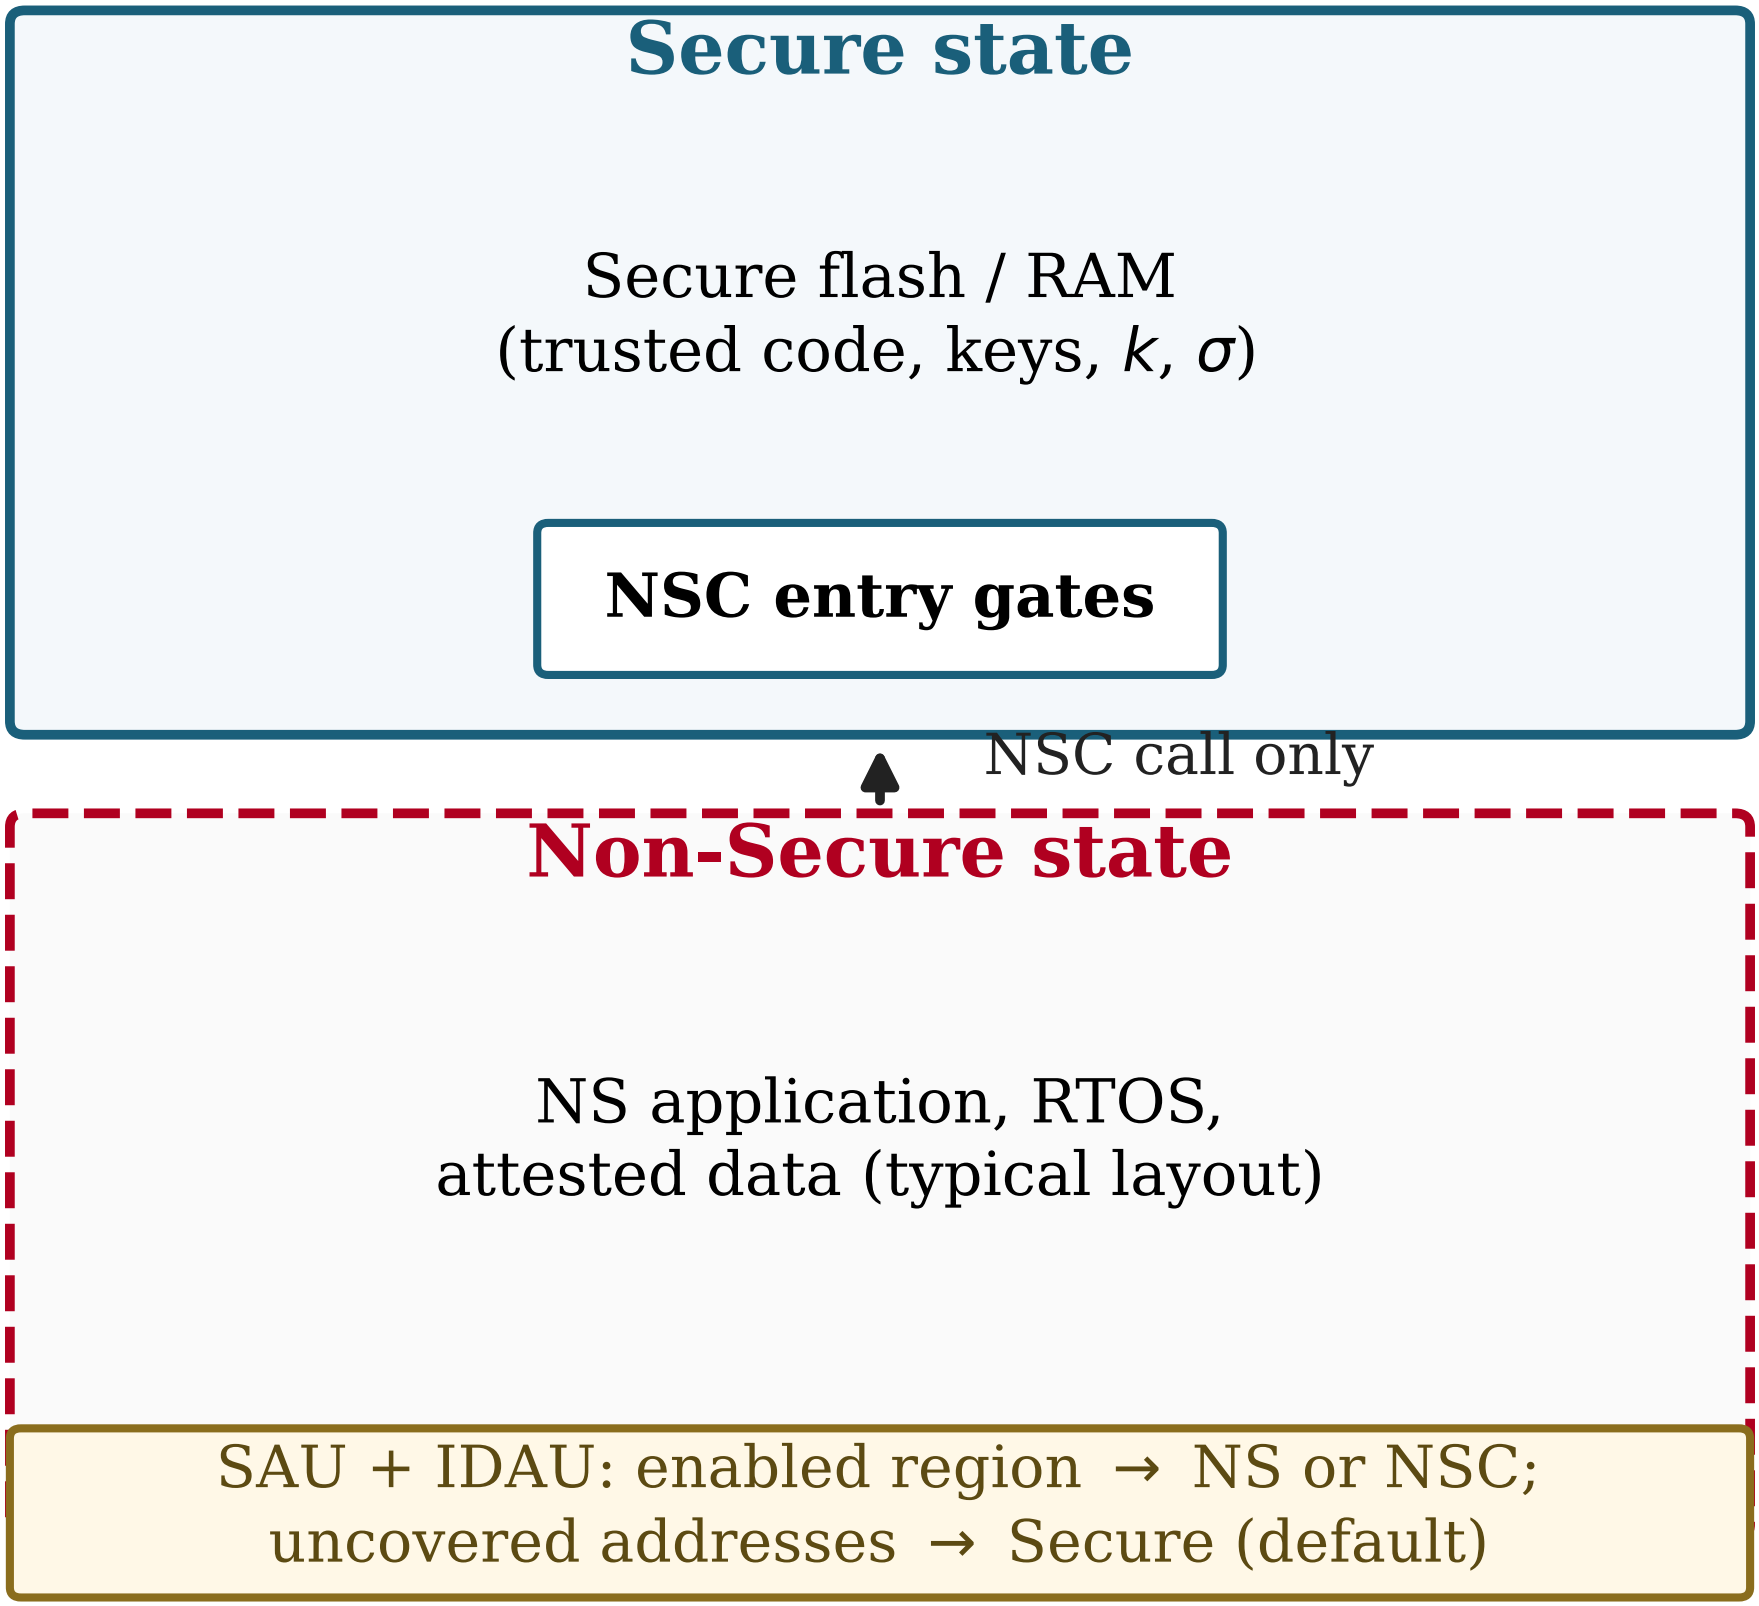
Secure state
Secure flash / RAM
(trusted code, keys, k, σ)
NSC entry gates
NSC call only
Non-Secure state
NS application, RTOS,
attested data (typical layout)
SAU + IDAU: enabled region → NS or NSC;
uncovered addresses → Secure (default)