




RADXA ROCK 2F – physical 40–pin header

Two INMP441 microphones share I2S0; L/R selects stereo channel

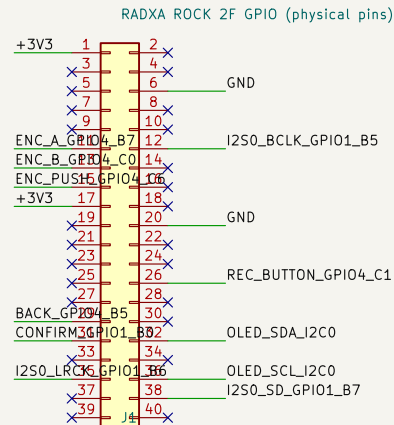


J2 pins: VDD, GND, SCK, WS, SD, L/R=GND (LEFT)




J3 pins: VDD, GND, SCK, WS, SD, L/R=3V3 (RIGHT)

HW-787AB OLED + encoder controls



J4 pin order follows PCB silkscreen: 3V3 ... CONFIRM

Recording button: active low, external 11 kΩ pull-up

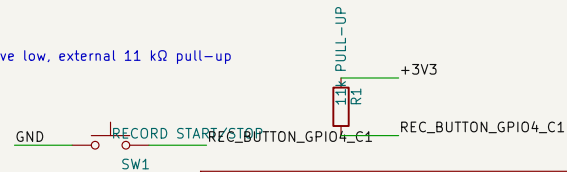

Do not connect WS2812B data without a 3.3→5 V level shifter

Sheet: /	
File: meeting-assistant.kicad_sch	
Title: Meeting Assistant – Radxa ROCK 2F wiring	
Size: A4	Date:
KiCad E.D.A. 10.0.5	Rev: Id: 1/1