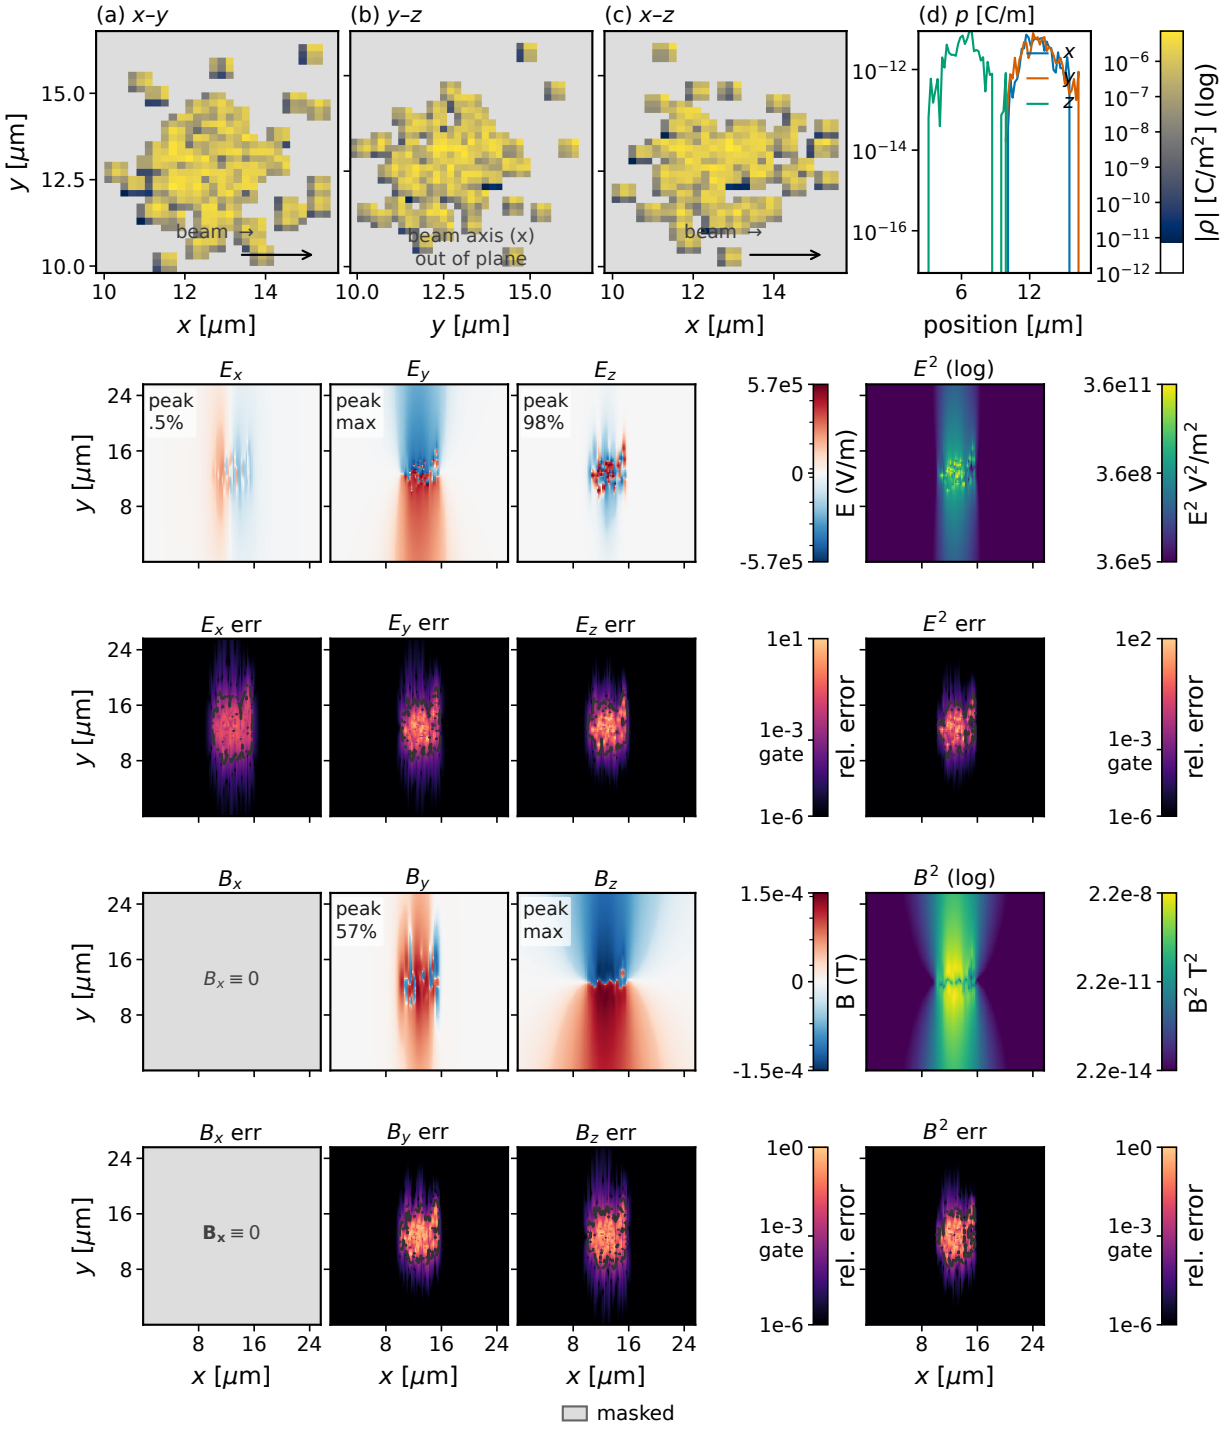

(a) x–y
(b) y–z
(c) x–z
(d) p [C/m]
beam →
beam axis (x)
out of plane
y [μm]
x [μm]
position [μm]
|ρ| [C/m²] (log)
E_x
E_y
E_z
E^2 (log)
peak .5%
peak max
peak 98%
E (V/m)
E² V²/m²
E_x err
E_y err
E_z err
E^2 err
rel. error
gate
B_x
B_y
B_z
B^2 (log)
$B_x \equiv 0$
peak 57%
B (T)
B² T²
B_x err
B_y err
B_z err
B^2 err
$\mathbf{B_x} \equiv 0$
masked