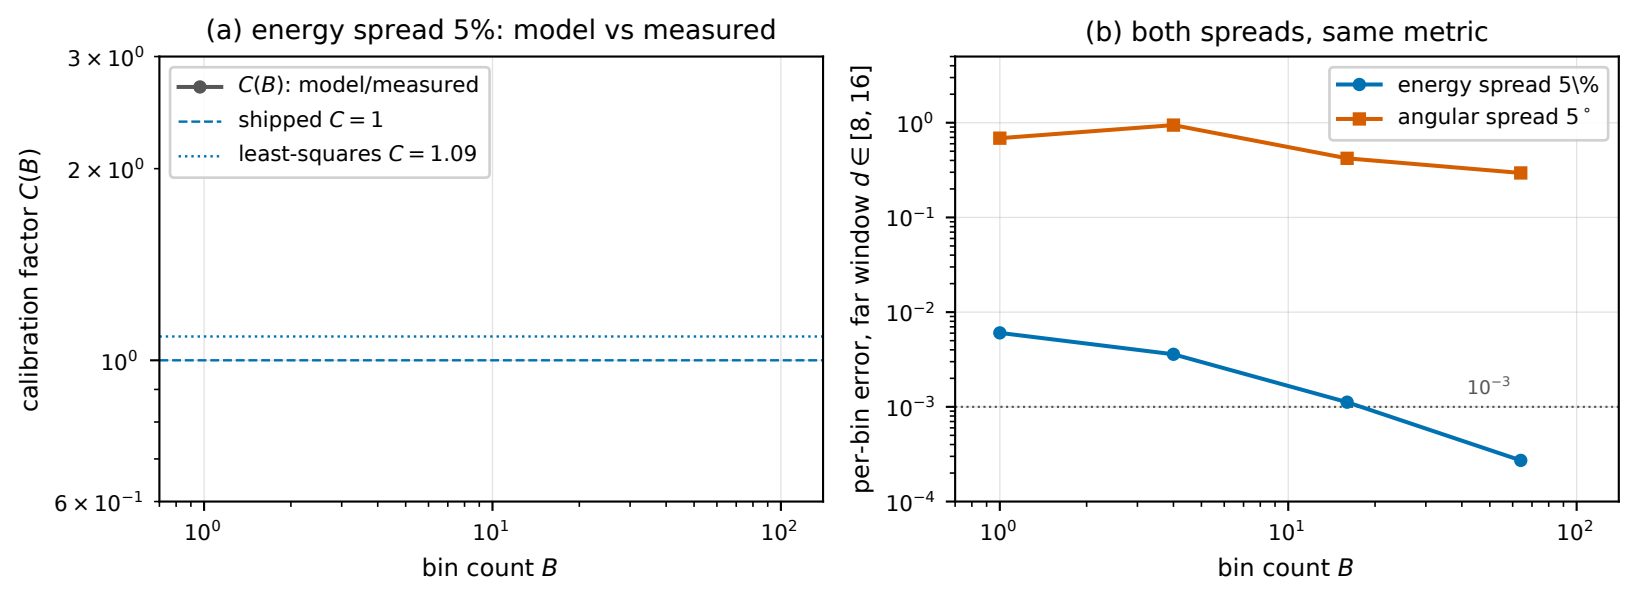
(a) energy spread 5%: model vs measured
C(B): model/measured
shipped C = 1
least-squares C = 1.09
calibration factor C(B)
bin count B
(b) both spreads, same metric
energy spread 5\%
angular spread 5 °
per-bin error, far window d ∈ [8, 16]
10^-3
bin count B