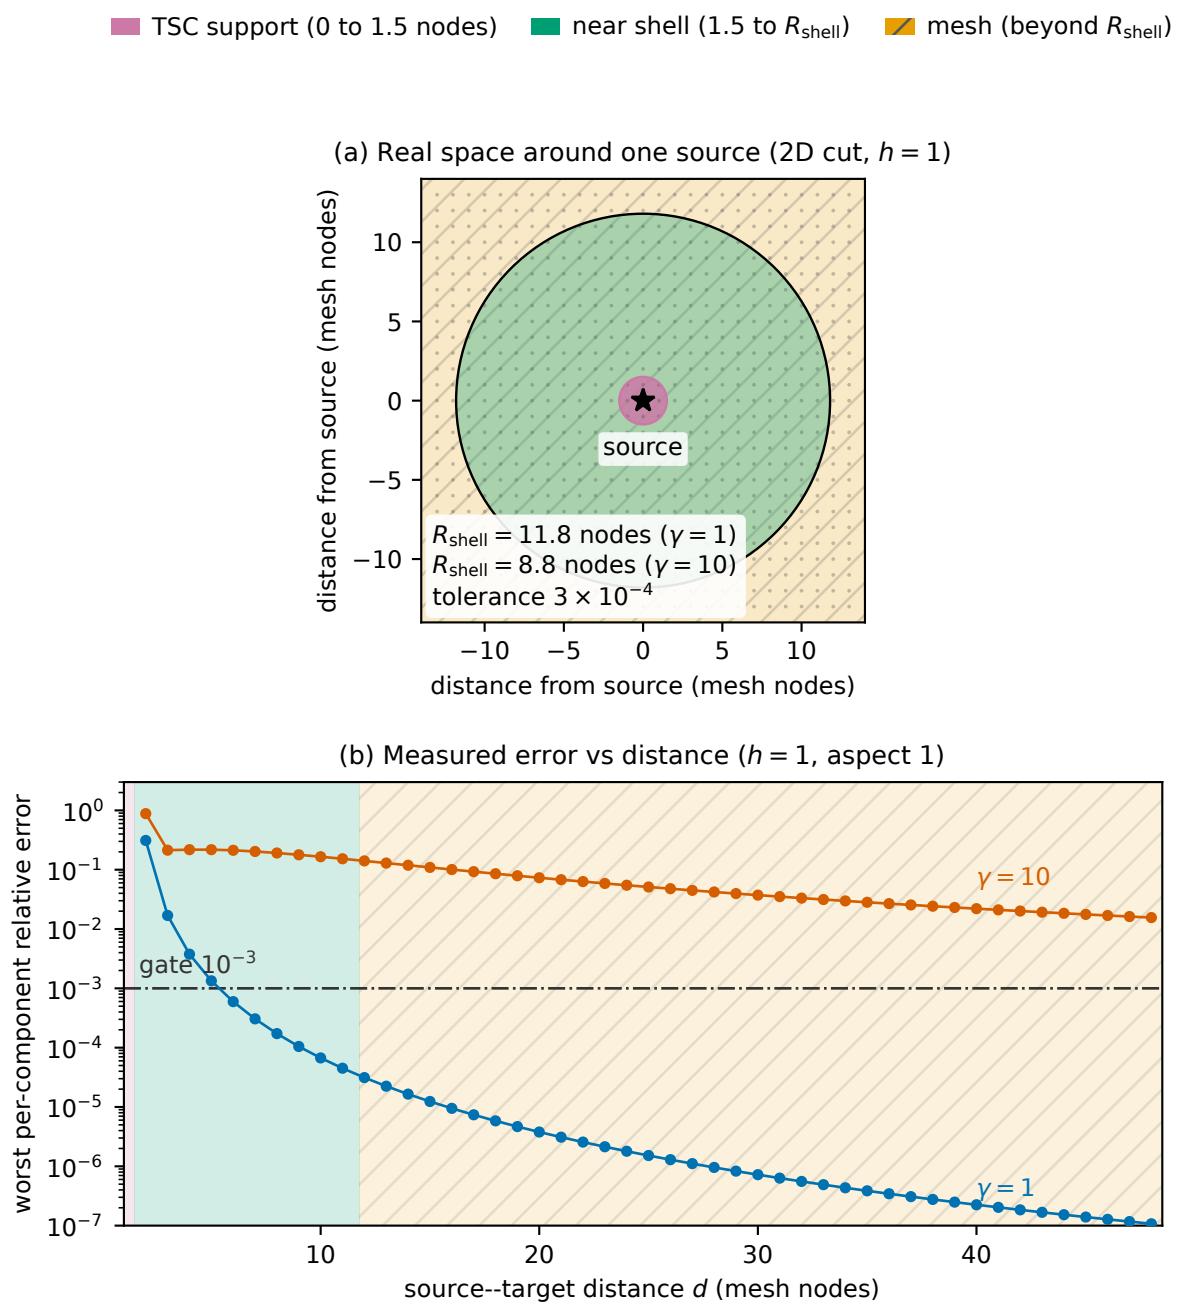
TSC support (0 to 1.5 nodes)
near shell (1.5 to R_{shell})
mesh (beyond R_{shell})
(a) Real space around one source (2D cut, $h = 1$)
distance from source (mesh nodes)
source
$R_{shell} = 11.8$ nodes ($\gamma = 1$)
$R_{shell} = 8.8$ nodes ($\gamma = 10$)
tolerance 3×10^{-4}
distance from source (mesh nodes)
(b) Measured error vs distance ($h = 1$, aspect 1)
worst per-component relative error
gate 10^{-3}
$\gamma = 10$
$\gamma = 1$
source--target distance d (mesh nodes)