

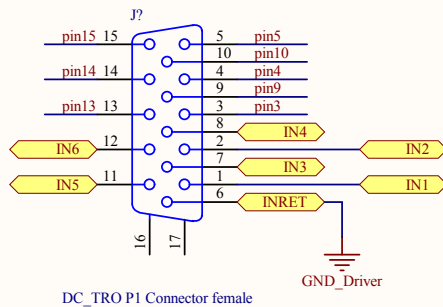


1

2


3

4

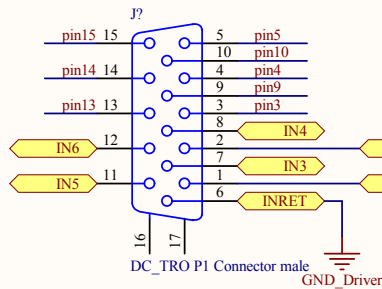


- All Registers & LEDs should be SMD type with 0603 or 0805 footprint
 - LEDs & opto forward voltage drop about 2V..4V..
 --> turn-on current for Led & opto about:16mA .. 25mA (Thin Calculate the correct register value base on input voltage)

- The Jumper is shorted if we want to use 24V power supply for both Driver & limit switch


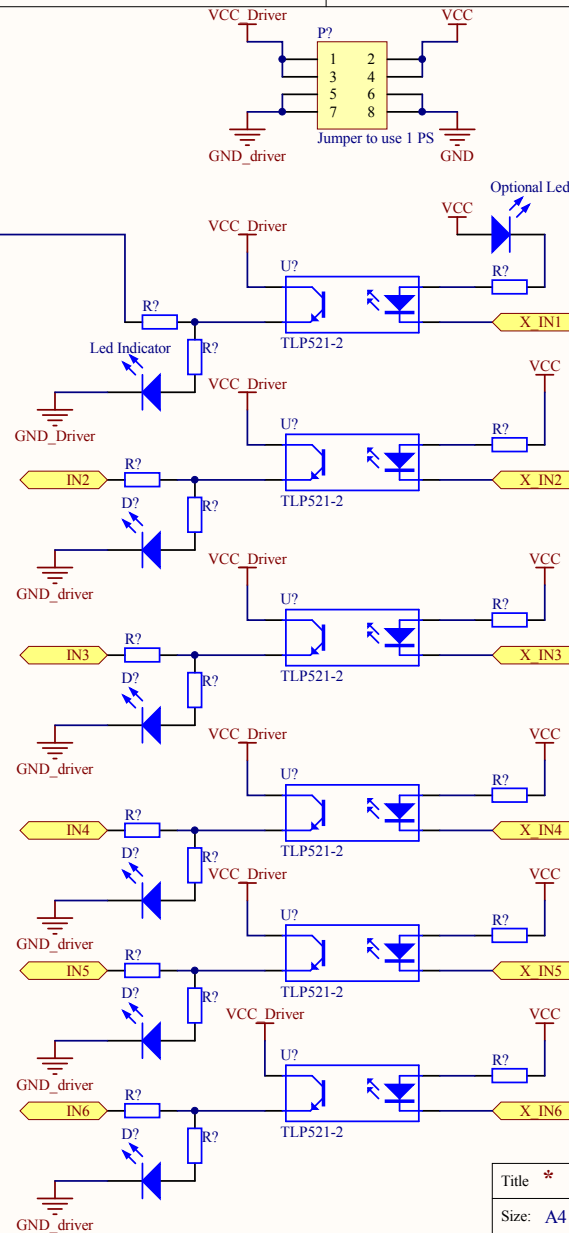


Select one of the two: Centralized connectors, or Separated connectors

Centralized Connectors



Separated Connectors

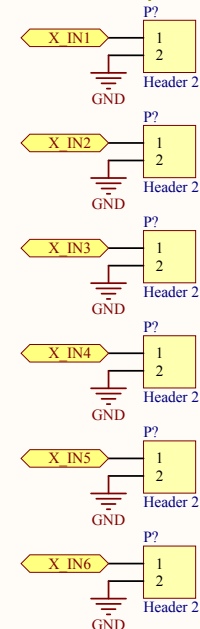

Title *		
Size: A4	Number: *	Revision: *
Date: 2/4/2013	Time: 2:17:52 PM	Sheet * of *
File: C:\Working\InverterAKien\HW\Input for Elmo.sch		

1

2

3

4