


Wi-Fi RF Path: this RF path extracts the 2.4 GHz Wi-Fi signal from the HF coaxial cable while rejecting the HF signal by more than 120 dB. It operates as a duplexer. At the local site, near the radio or amplifier, an RF combiner/duplexer combines the HF and 2.4 GHz Wi-Fi signals onto the same coaxial cable.

ESP32 PCB Wi-Fi antenna using a physical patch connection. This implementation was validated on the assembled hardware.

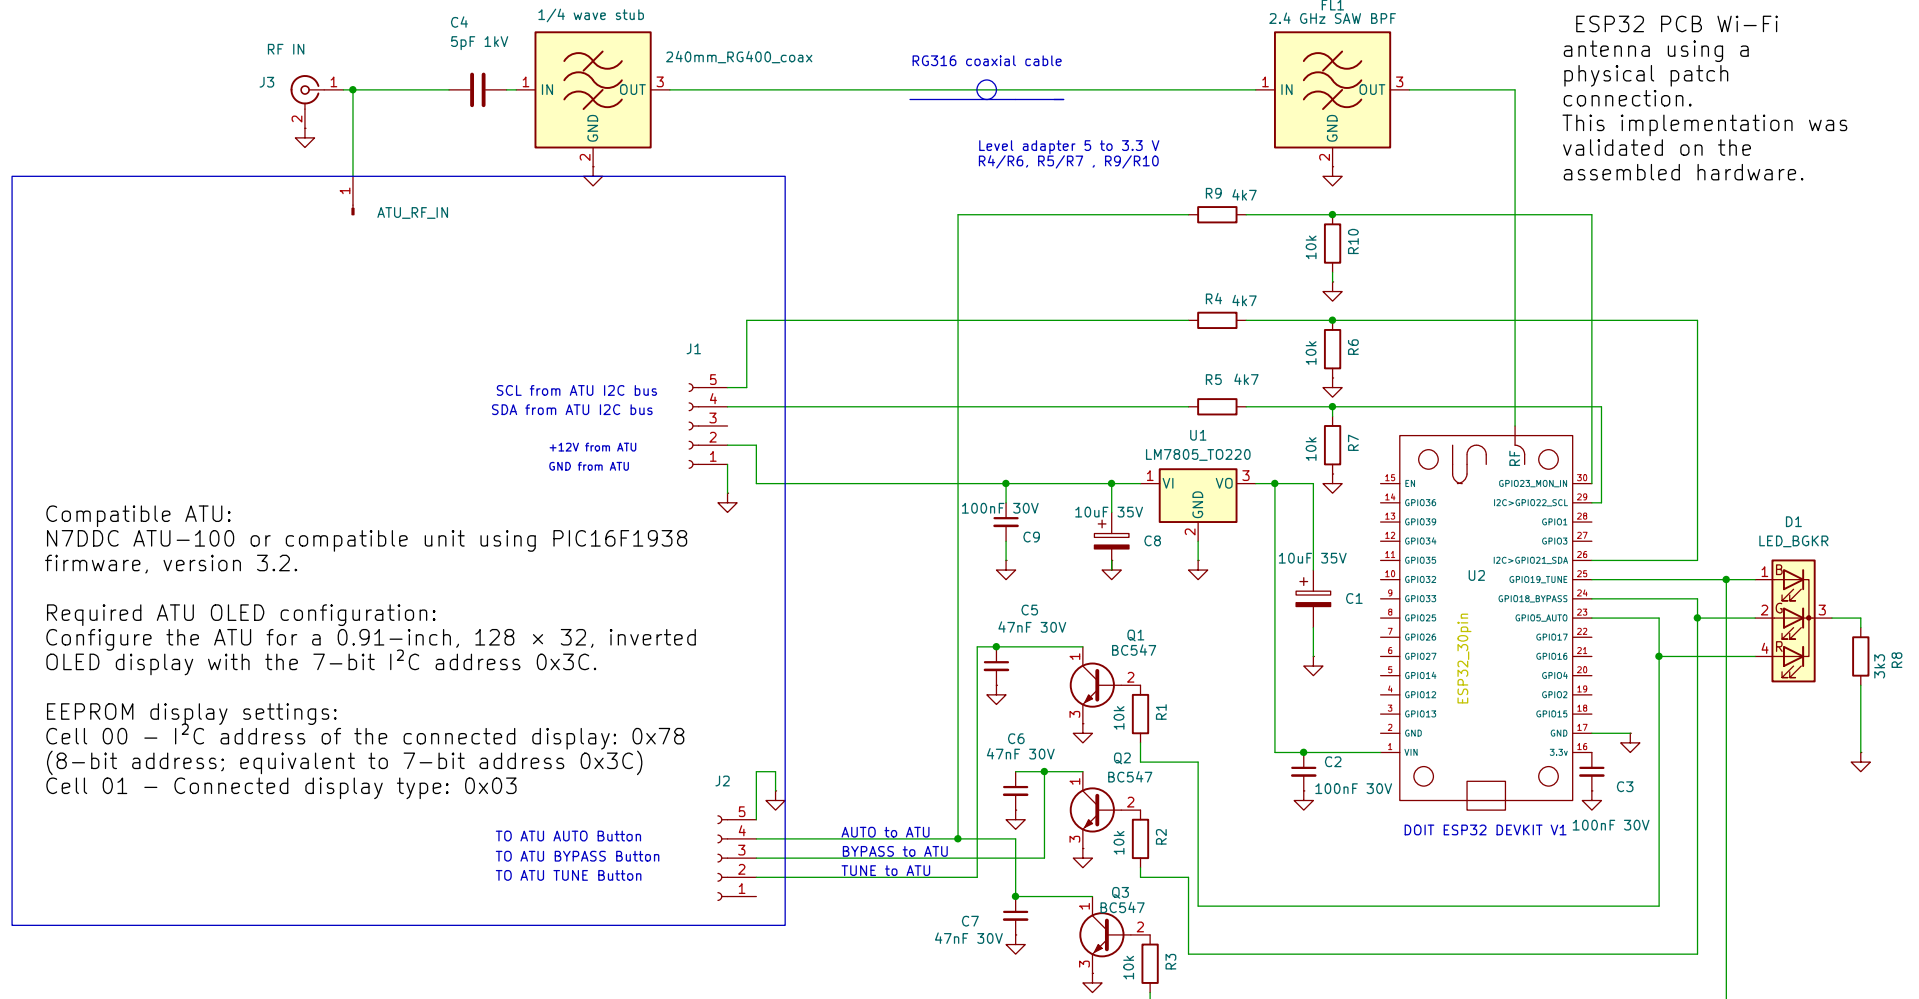

Non-intrusive I²C bus reader, Wi-Fi web server, and 128 x 32 OLED display mirror

Sheet: /

File: Remote ATU.kicad_sch

Title: Wi-Fi Remote Interface Web Server + OLED Mirror by PY1JDX

Size: A4

Date: 2026-09-25

Rev: 1.3

KiCad E.D.A. 10.0.3

Id: 1/1