

USB Instructions for upgrading via a connected computer

Note: You need to prepare a computer with **Windows 10 or above system**
(**you need to turn off the network firewall and other anti-virus**
software),

Dual male standard AUSB cable or **standard AUSB to microUSB cable**
(as shown below)




Double male connector USB Wire




USB change micro Wire


1. Preparation before upgrading the firmware

(1) First, unzip the upgrade tool compressed package to the computer desktop and find the driver file application as shown below Program, double-click to install the upgrade tool driver, as shown below:

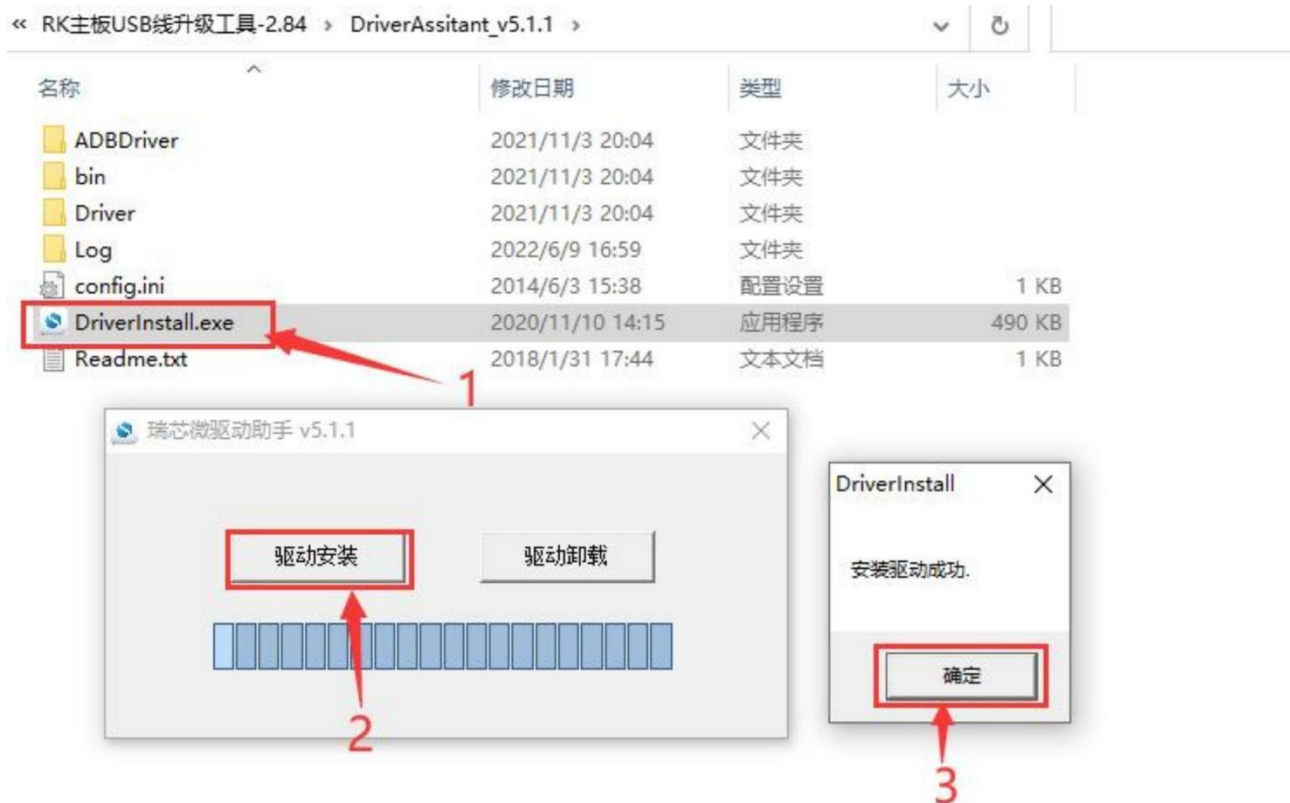

(2) Find the firmware upgrade tool application and double-click to open it, as shown below:

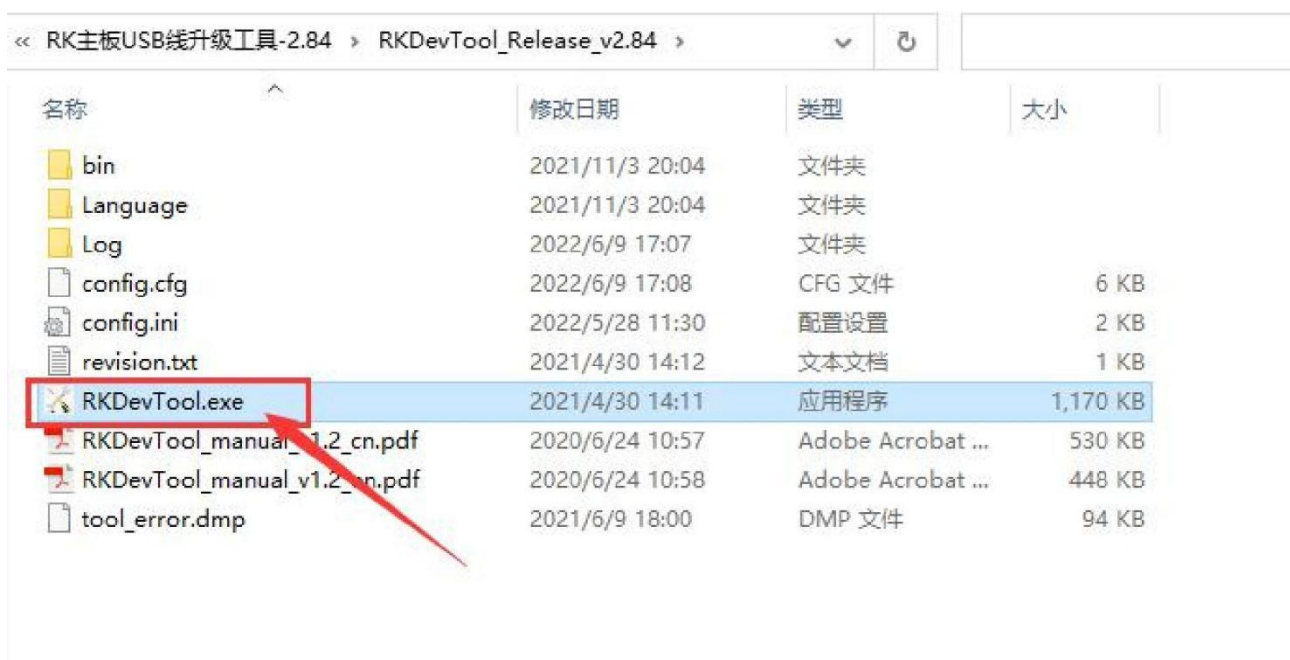

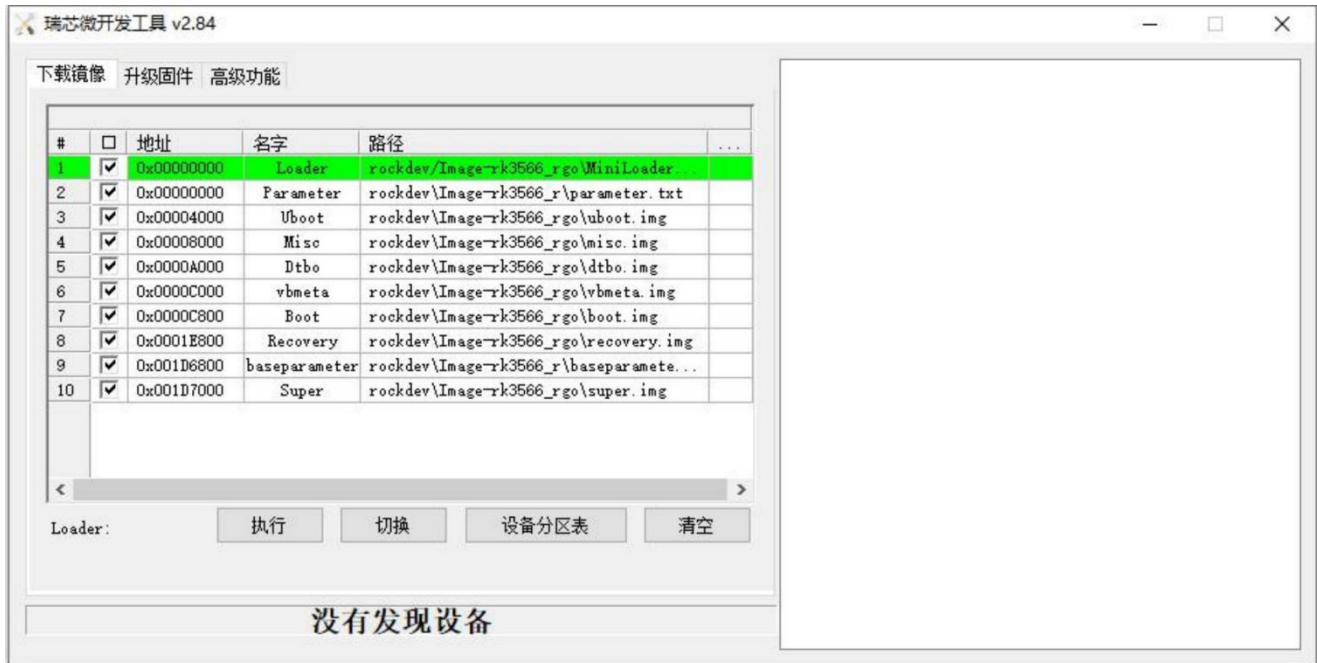


(3) After the upgrade tool is opened, select the firmware to be upgraded (firmware compressed package) in the pop-up box in the following order Decompressed img suffix), as shown below:



2. Use Connect the device to the computer via USB cable and upgrade the firmware

(1) Bare board upgrade instructions


the bare board **is powered off** , first Plug one end of the USB cable into the computer, and then long press **the UBOOT** While pressing **the key** Plug the other end of the USB cable **into the motherboard USB-OTG** Wait for the computer upgrade tool to display the Now **one After the LOADER device is connected** , it means that the motherboard has been successfully connected to the computer, and then you can release it. UBOOT Press the key to start the next step of upgrading the firmware, as shown below:

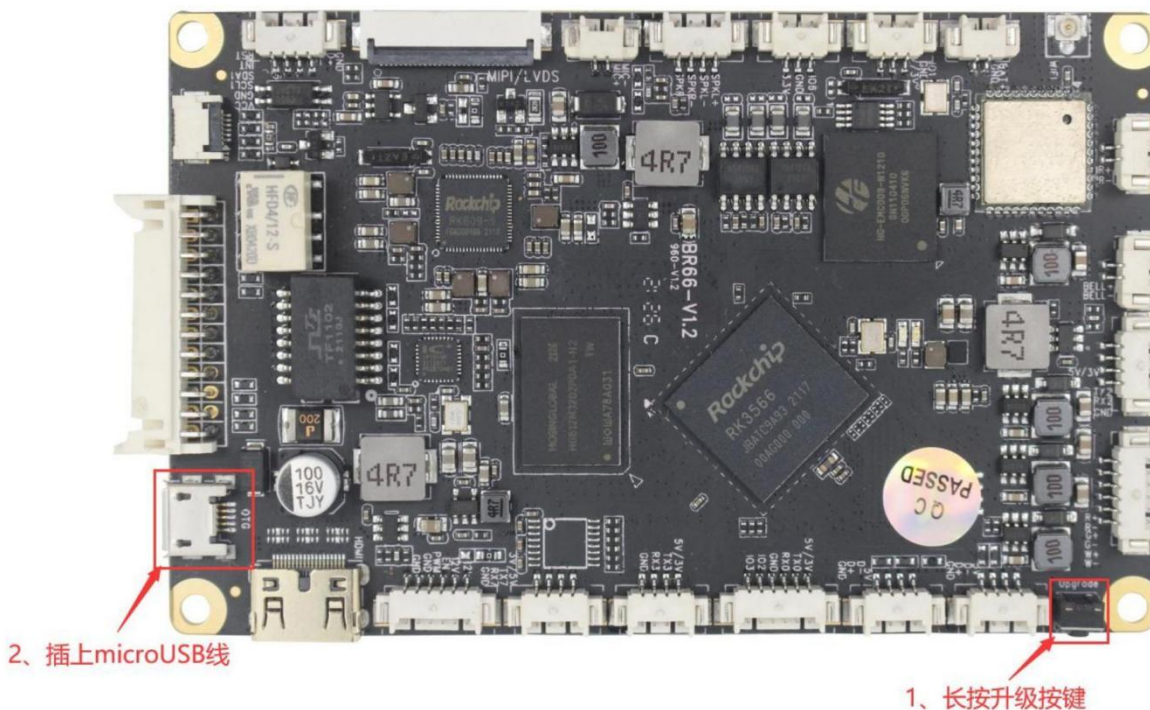

Note: When upgrading the firmware on a bare board, the multi-function interface cannot be connected to a pigtail. If a pigtail is connected, it needs to be unplugged. Do it again !!!

3. Upgrade the firmware

(1) The computer upgrade tool shows that it has identified a After installing the **LOADER device** , click the upgrade tool button to start downloading the firmware as shown below:

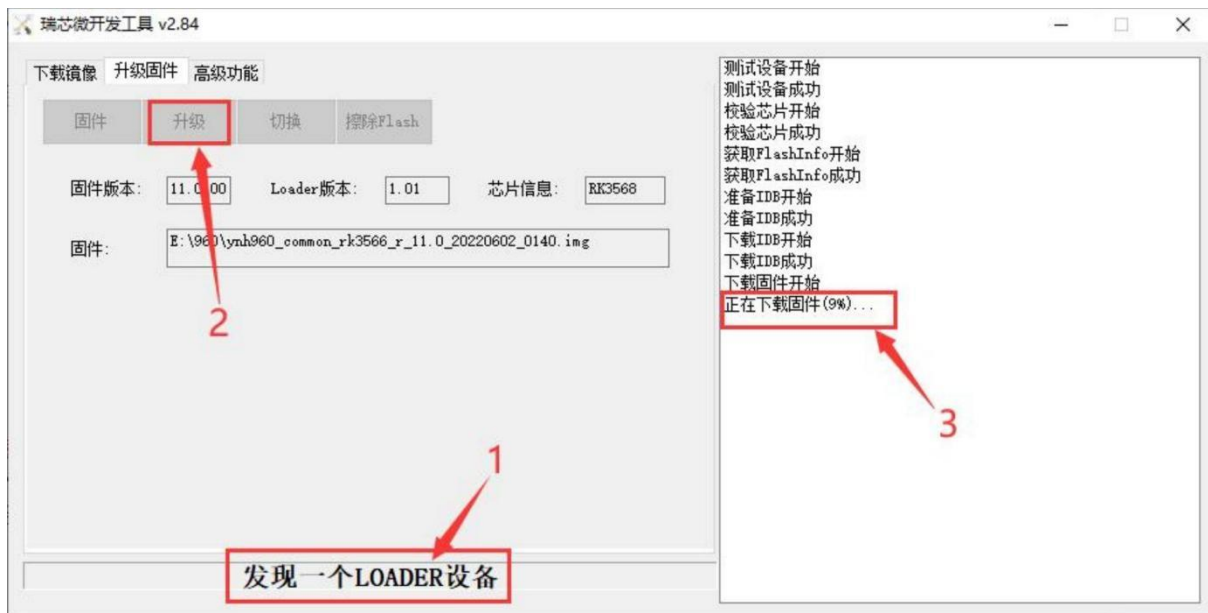

Note: Do not click Erase by default after the device is recognized **Flash** Click upgrade again, erase If **Flash** is upgraded again, it will be cleared. Delete important information such as screen parameter files / touch screen parameter files / algorithm authorization on the previous device !

(2) The process of downloading the firmware requires After about **2~3** minutes, the download will be completed and the device will be restarted **successfully** . Then the bottom of the tool will show that **no device was found** , which means **the firmware upgrade is complete** . At this time, unplug the main plate USB-OTG Mouth upgrade The USB cable is all that's needed! **Then reconnect the tail cable and power on the device!**

The leading biometric solution provider since 2005

