

Assessing the feasibility of developing and taping-out an analog block for LED driver control using IHP-Open-PDK and IIC-OSIC-TOOLS

Priyanka Toyni

Hrishikesh Pangavhane

November 2025



Faculty of Electrical Engineering and Computer Science

**Assessing the feasibility of developing and
taping-out an analog block for LED driver
control using IHP-Open-PDK and
IIC-OSIC-TOOLS**

by

Priyanka Toyni
Matr.-Nr.: 5363791

ORCID iD: 0009-0007-6435-4990

Hrishikesh Pangavhane
Matr.-Nr.: 5363452

ORCID iD: 0009-0008-0089-336X

A Thesis presented to the City University Bremen
in fulfillment of the thesis requirement for the degree of
Master in Electronics Engineering

1. Examiner: Prof. Dr.-Ing. M. Meiners
2. Examiner: Prof. Dr. (PhD) S. Peik

Preparation Period: 26.05.2025 – 26.11.2025

Table of contents

1. Introduction	6
1.1. Scope of the Thesis	6
1.2. Motivation and Challenges	7
1.3. Methodological Contributions	7
2. Requirements	8
2.1. Topology Selection:	8
2.2. Block Diagram	8
I. Circuit Design	10
3. OTA Design	11
3.1. Into the design	12
3.2. Sizing using g_m over I_d method	12
3.3. Complete Design and constant g_m biasing using current mirrors	13
3.3.1. Discussion of the OTA Design	15
3.4. Simulation of the OTA	15
4. Corner Simulations for PVT and Monte-Carlo	21
II. Physical Design	24
5. Introduction to Layout	25
5.1. Layout Toolchain: KLayout	25
6. Device-Level Layout Concepts	26
6.1. Matching & Symmetry	26
6.2. Multi-Fingering	28
6.3. Dummy Devices	30
6.4. Interdigitated Layout	30
6.5. Common-Centroid Layout	31
6.6. Finger Count Estimation (Minimum Number of Fingers)	33
6.6.1. Gate Resistance Requirement (Low-Noise Criterion)	34
6.6.2. Noise Model Adjustment Based on Channel Length	35
6.6.3. Minimum Geometry Constraint	35
6.6.4. Even Number of Fingers (Practical Layout Consideration)	35
7. Design Rule Checking (DRC)	36
7.1. Fundamentals of DRC	36
7.2. Technology Dependence and Process Node	36
7.3. Importance in the Design Flow	37
7.4. Practical Implementation of Design Rule Checking	37
7.4.1. Types of DRC Scripts in the IHP SG13G2 Process	38
7.4.2. Performing DRC in KLayout	38
7.4.3. DRC Automation Script	39
8. Layout Vs Schematic (LVS)	41
8.1. Fundamentals of LVS	41
8.2. Importance in the Design Flow	41

8.3. Practical Implementation	42
8.4. Interpreting and Visualizing LVS Results in KLayout	42
9. Parasitics and Prevention	44
9.1. Why Analog Suffers More from Parasitics	44
9.2. Interconnect and Device-Level Parasitics	45
9.2.1. Metal and Coupling Capacitances	45
9.2.2. Via and Contact Parasitics	45
9.2.3. Junction/Overlap Capacitances	45
9.3. Critical Parasitics Mechanisms and Mitigation Strategies	45
9.3.1. Latch-Up	45
9.3.2. Antenna Effect	46
9.3.3. Interconnecting Vias (Reliability and Noise)	46
9.3.4. Charge Injection and Gate Coupling	46
9.4. Guard Rings (Local Substrate Sinks) - Saviour	47
9.5. Block-Level Practices Implemented in This Work	48
9.6. Practical Checklist (Analog-Focused)	48
10.Final Layout Steps - Bonding, Seal Ring, and Pad-Frame Integration	50
10.1. The Seal Ring: Mechanical and Electrical Protection	50
10.2. Bond Pads and External Interfacing	50
10.3. Bonding Techniques: Wire Bonding vs. Flip-Chip	51
10.3.1. Wire Bonding	51
10.3.2. Flip-Chip Bonding	51
10.4. Pad Geometry: Orthogonal vs. Square Pads	51
10.5. ESD Protection	52
10.6. Density Fill Structures (Metal, Active, and Poly Fillers)	52
III. Post-Layout Simulation	55
11.Post layout simulation.	56
12.PEX	60
12.1. Why Do We Need PEX?	60
12.2. PEX using Klayout-PEX tool	60
12.3. Running the KPEX/MAGIC Engine [9]	61
12.3.1. Example Command	61
12.4. Observations and Practical Results	61
13.Conclusion	62
Bibliography	63
Appendices	64
A. Tapeout Submissions and Repository Links	64
A.1. Tapeout 1	64
A.2. Tapeout 2	64
B. Final Chip Layout	65
C. USB-Stick and Script Referencing	67

List of Figures

2.1. Block Diagram[1]	8
3.1. Topology	12
3.2. OTA design in Xschem	14
3.3.	15
3.4. AC Analysis Output	16
3.5. Transient Analysis Setup	17
3.6. Transient Analysis Output	18
3.7. Loop Gain Setup Tian	18
3.8. Loop Gain Setup MiddleBrook	19
3.9. Magnitude middlebrook vs Tian.	19
3.10. Phase middlebrook vs Tian.	20
4.1. noise_vs_corner	23
6.1.	27
6.2. Contradictory to above gradient in mechanical stress high gradient area should be avoided such as corners and devices should be placed closer to chip center lines (adapted from [6]).	27
6.3. Represents the tail transistor in our layout with 4 fingers instead of one huge block lead to well matched layout with other transistors and clean routing.	29
6.4. Shows the interdigitated layout pattern “ABBA” (right) of current mirror schematic of NMOS-FETs with current ratio 1:1(left). The “D” gates in layout represent the Dummy transistors.[6]	31
6.5. Illustrates how common centroid configuration can be achieved (right) of current mirror schematic of NMOS-FETs with current ratio 1:1(left). Its clear that devices are extremely symmetrical along X-and Y-axis, however routing always introduces some asymmetry which can be neglected for time being. Here, space is intentionally left between transistors for clear visuals and understanding. The “D” gates in layout represent the Dummy transistors.	32
6.6. Modified Layout of OTA’s Differential Pair with labelled terminals. All used layers are described in bottom-right corner. The box around the pair is called Guard Ring which is tied to VSS, also acts as body terminal for all the devices and is explained in Chapter - <i>Parasitics and Prevention</i> .	33
7.1. Macro Development interface with DRC Results in Console	39
8.1. Netlist Browser to view LVSDb files and trace nets	43
10.1. Final NMOS-OTA Chip Layout with Bondpads, ESD Diodes and Metal Fillers around the core block before final density fillers.	54
11.1. Primitive	56
11.2. Include	57
11.3. Postlayout Results	59
B.1. Final PMOS OTA after adding fillers	66

List of Tables

3.1. Finalised Specifications 12

4.2. Voltage buffer specification 23

List of Abbreviations

AC — Alternating Current
AVDD — Analog Supply Voltage
AVSS — Analog Ground
CACE — Computer-Aided Circuit Evaluation
CC — Coupling Capacitor
C — Capacitance
 C_{gd} — Gate–Drain Capacitance
 C_{gs} — Gate–Source Capacitance
CMOS — Complementary Metal–Oxide–Semiconductor
CMRR — Common-Mode Rejection Ratio
DC — Direct Current
DFM — Design for Manufacturability
DRC — Design Rule Check
EDA — Electronic Design Automation
EDA-OS — Open-Source Electronic Design Automation
ESD — Electrostatic Discharge
FF — Fast–Fast Process Corner
FS — Fast–Slow Process Corner
GDS / GDSII — Graphic Data System (Final Layout Format)
 g_m — Transconductance
Hz — Hertz
I/O — Input/Output
IC — Integrated Circuit
 I_d — Drain Current
IHP — Innovations for High Performance Microelectronics
LED — Light-Emitting Diode
LDO — Low-Dropout Regulator
LHS — Left-Hand Side
L — Channel Length
 L_{min} — Minimum Channel Length
MC — Monte-Carlo Simulation
MIM — Metal–Insulator–Metal Capacitor
MOSFET — Metal–Oxide–Semiconductor Field-Effect Transistor
MPW — Multi-Project Wafer
μm — Micrometre (Micron)
 n_g — Number of gates
 N_f — Number of fingers
NMOS — n-channel MOSFET
nm — Nanometre
OTA — Operational Transconductance Amplifier
PAD — Bond Pad
PCB — Printed Circuit Board
Pcell — Parameterized Cell

PDK — Process Design Kit
PEX — Parasitic Extraction
PMIC — Power Management Integrated Circuit
PMOS — p-channel MOSFET
PPV — Post-Processing Verification
PSRR — Power Supply Rejection Ratio
PVT — Process, Voltage, Temperature
Qt — Qt Framework (used by KLayout GUI)
R — Resistance
 R_{sub} — Substrate Resistance
 R_{well} — Well Resistance
SG13G2 — IHP 130-nm SiGe BiCMOS Technology
SME — Small and Medium-Sized Enterprise
SS — Slow–Slow Process Corner
SF — Slow–Fast Process Corner
STI — Shallow Trench Isolation
TT — Typical–Typical Process Corner
UGB — Unity-Gain Bandwidth
V — Volt
 V_{DS} — Drain–Source Voltage
 V_{GS} — Gate–Source Voltage
 V_{IN}^+ — Non-inverting Input Voltage
 V_{IN}^- — Inverting Input Voltage
 V_{OUT} — Output Voltage
 V_{REF} — Reference Voltage
W — Channel Width
W/L — Width-to-Length Ratio

Declaration of Authorship

https://www.hs-bremen.de/assets/hsb/de/Dokumente/ZLL/MMCC/declaration_indep_work_No_v_2024_Form.pdf

We hereby certify that we have written this thesis independently and have not used any sources or aids other than those specified. Sources and aids other than those indicated. The passages in the thesis that have been taken from other works in terms of wording or meaning are from other works are identified as such.

This statement also applies to the graphics, sketches and illustrations contained in the thesis. We have not already submitted the work in the same or a similar form, including extracts, as part of an examination or coursework.

We hereby certify that the electronic version of the dissertation submitted is a complete copy of the printed version. and agree to an electronic check of the thesis using plagiarism software.

Please tick the box: One of the two options must be chosen in consultation between the assessor and the assessee.

- ☐ Option 1: Use of AI-based tools without mandatory labelling We confirm that we have not used any AI-based tools whose use has not been agreed in writing with the verifier. We understand that the use of text or other content and products generated by AI-based tools is not a guarantee of their quality. We accept responsibility for the work submitted and the content contained therein. We also assure you that our creative influence predominates in this work.
- ☐ Option 2: Use of AI-based tools with mandatory labelling We confirm that we have not used any AI-based tools whose use has not been agreed in writing with the verifier. We understand that the use of text or other content and products generated by AI-based tools is not a guarantee of their quality. We accept responsibility for the work submitted and the content contained therein. We also assure you that our creative influence predominates in this work. All verbatim or analogous adaptations and quotations, and all sections designed, written and/or edited using AI-based tools, will be marked and checked by us. The form of marking will be agreed between the examiner and the examinee.

We are aware that failure to comply with the above may have consequences in terms of examination law, and in particular may result in the examination being marked 'insufficient' or the coursework being marked 'failed' and, in the case of multiple or serious attempts to cheat, may result in my being de-registered.

First name and surname:

Matriculation number:

Date:

Signature:

First name and surname:

Matriculation number:

Date:

Signature:

Abstract

Open-source EDA has reached a point where its practical viability for real mixed-signal IC fabrication can be examined on modern semiconductor processes. This thesis evaluates that potential through the design and tape-out of an analog block for LED-driver control using the IHP OpenPDK SG13G2 a 130 nm SiGe BiCMOS PDK and the implementation using the open-source IIC-OSIC-TOOLS developed by Prof. Pretl (JKU Linz).

The project follows a complete analog design cycle. System requirements are derived from an ideal reference schematic of a DC-DC LED-driver PMIC, modeled following the methodology from Prof. Bernhard Wicht’s book on design of Power Management ICs. From these constraints, we design an operational transconductance amplifier (OTA) intended to drive a specific load extracted from the system-level PMIC model. The electrical design is implemented in Xschem for schematic capture, Ngspice for pre-layout simulation, corner and Monte-Carlo analysis using CACE, and iterative refinement to ensure gain, UGB, phase margin, and output swing meet the load-driving requirements under process and temperature variation.

The physical design phase is performed entirely in KLayout, following industry-aligned analog layout practices: matching-aware device placement, common-centroid arrays, dummy structures, guard rings, routing strategies, density compliance, pad-frame integration, and the use of IHP-provided seal-ring and ESD p-cells. Parasitics are extracted using KLayout-PEX (KPEX), and post-layout simulations confirm the impact of capacitor/resistor parasitics on stability and dynamic response, validating the design’s robustness across PVT.

A key contribution of this work is practical verification: two tape-outs were accepted and fabricated in the IHP Open MPW run of July 2025. To strengthen cross-disciplinary understanding, the authors executed two complete tape-outs, one for a design of NMOS foldedcascode structure and other for PMOS foldedcascode structure, switching roles one serving as design engineer while the other served as layout engineer in the first run, and vice versa in the second. This approach revealed workflow bottlenecks, toolchain strengths, and realistic guidance for analog teams adopting open-source EDA.

The results demonstrate that a fully open-source toolchain, combined with an industry-grade SiGe BiCMOS open PDK, can reliably produce manufacturable analog ICs with predictable post-layout performance. This work serves as a practical reference for engineers, researchers, and SMEs evaluating open-source flows for mixed-signal IC development, and provides evidence that democratized, open analog IC design is not only feasible but tape-out proven.

Acknowledgement

We would like to express our heartfelt gratitude to Prof. Dr.-Ing. Mirco Meiners for his exceptional guidance, patience, and trust throughout the course of this thesis. From the very beginning, he believed in our potential even more strongly than we did ourselves, and he continuously encouraged us to explore, question, and grow as independent designers.

There is one sentence he once told us that has stayed with us throughout the entire journey: “I will make sure you don’t drown, but I will let you swim freely.” This perfectly captures his mentoring philosophy giving us the freedom to learn on our own, while always providing a safety net when it truly mattered. It is this balance of independence and support that shaped not only our work, but also our confidence as young engineers.

We are deeply grateful for his trust, his insightful feedback, and the countless ways in which he motivated us to push our limits. Working under his supervision has been an inspiring experience, and we feel genuinely privileged to have learned from him.

Chapter 1.

Introduction

In recent years, the **open-source hardware ecosystem** has matured to a point where advanced *analog* and *mixed-signal* integrated circuit (IC) design has become increasingly feasible outside proprietary EDA environments.

Building on this trend, the present work contributes to the **preparatory phase of a larger collaborative initiative** that aims to strengthen open-source-based chip design methodologies for small and medium-sized enterprises (SMEs), universities, and research institutes.

Using the design of an **LED driver IC** as a demonstrator, the overarching project seeks to **identify and close gaps** in the open-source design flow and to establish a reproducible, validated toolchain for mixed-signal system design.

i Project Context

This thesis forms the **technical pre-work** of a multi-partner initiative that extends the *IIC-OSIC-TOOLS* environment with the *IHP SG13G2 OpenPDK*, enabling future open-source mixed-signal tapeouts for SMEs and universities.

The long-term objective of the parent project is to extend the **open-source IIC-OSIC-TOOLS** developed by *Prof. Pretl (JKU Linz)* with the **IHP OpenPDK SG13G2**, a 130 nm SiGe BiCMOS process offering analog and RF capabilities suited for power management, sensor, and communication ICs.

By integrating the PDK into the IIC-OSIC-TOOLS flow, the project aims to make **open-source chip design accessible for SMEs**, who have so far been restricted to board-level development due to the prohibitive cost and complexity of commercial EDA ecosystems.

This initiative aligns with the global movement toward **democratizing IC design**, exemplified by the formation of the *IEEE SSCS Technical Committee on Open Source Ecosystem (TC-OSE)*.

1.1. Scope of the Thesis

Within this framework, the present thesis establishes the **proof of concept for the analog front-end** of the LED driver IC.

The work focuses on developing, simulating, and taping-out an **operational amplifier (OTA)** using the **IHP SG13G2 PDK** and the **IIC-OSIC-TOOLS**.

The design was submitted to the **IHP Open Multi-Project Wafer (MPW) Run in July 2025**, demonstrating a complete, fabrication-ready analog layout realized entirely with open-source tools such as **Xschem**, **Ngspice**, **KLayout**, **Klayout-PEX**, and **CACE**.

! Technical Milestone

The successful **tape-out of the OTA** represents one of the earliest demonstrations of the SG13G2 OpenPDK using the IIC-OSIC toolchain and serves as a validation of the *open-source analog flow*.

1.2. Motivation and Challenges

The analog subsystem of an LED driver in **aircraft cabin lighting** must regulate voltages between **18 V and 32 V**, ensuring efficiency, low noise, and individual seat controllability.

Such power-management circuits are particularly sensitive to **layout-dependent parasitic effects**, which can degrade performance. Hence, a major emphasis of this work lies in the **DRC- and LVS-clean** design and its reliability in open-source flows.

1.3. Methodological Contributions

Beyond the circuit-level design, this research establishes a **validated analog verification workflow** under fully open conditions.

The complete flow — from schematic capture, device sizing, and layout to LVS, PEX, and post-layout simulation — was developed within the *IIC-OSIC-TOOLS* environment.

Insights gained from the OTA design, including *device matching*, *guard-ring implementation*, *fill density*, and *PEX consistency*, are being integrated into improvements of the toolchain for future mixed-signal designs.

Chapter 2.

Requirements

A switch-mode LED driver IC needs to be designed to operate within an 18–36 V input range, support high-resolution (16-bit) PWM dimming for at least four RGBW channels with adjustable current control (1–40 mA), integrate protection features (ESD, over/under-voltage, over-temperature), and enable robust data communication with upstream and downstream ICs. The IC must also include an internal oscillator (25 MHz), internal generation of data line supply (3–5 VDC), and advanced diagnostics such as LED error detection.

2.1. Topology Selection:

To meet the defined performance and protection requirements efficiently, a buck converter topology has been selected for the LED driver IC. This choice is based on the analysis and recommendations from Bernhard Wicht's 2020 paper **Analog Building Blocks for DC-DC Converters**, [1] which highlights the buck converter as a suitable and energy-efficient architecture for step-down voltage regulation in integrated power management systems. Given the input voltage range of 18–36 V and the need for tightly regulated current control per channel (1–40 mA), the buck converter enables high efficiency and compact implementation. Its compatibility with mixed-signal integration and the ability to support precise current regulation and fast transient response makes it well aligned with the requirements of our LED driver IC, particularly in ensuring reliable performance across varying input conditions and thermal loads.

2.2. Block Diagram

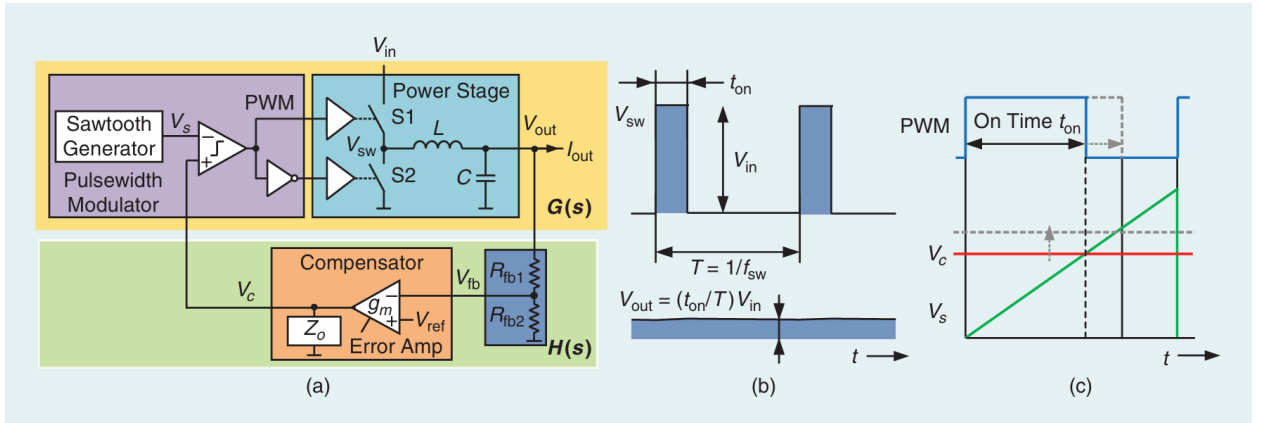


Figure 2.1.: Block Diagram[1]

Block	Function
Power Stage Interface	Inductor-Capacitor Buck output stage
PWM Generator	Ramp + Comparator
Error Amplifier	Feedback loop, V_ref vs V_out
Current Control	Per channel analog regulation (DAC + current sink)
Thermal + Voltage protections	Shutdown to over-temperature, over and under voltages
Biasing, reference circuits, reference sources	Bandgap or bias current

Part I.

Circuit Design

Chapter 3.

OTA Design

The focus of our thesis is designing and implementating error amplifier block within the selected buck converter topology using Open Source Tools. This involves developing the block from initial specification and schematic design through to layout, verification (including LVS and PEX), and final tapeout using exclusively open-source tools and IHP-SG13G2 PDK. The goal is to create a high-performance, low-power error amplifier tailored to the requirements of the mixed-signal LED driver IC, ensuring accurate regulation and stability of the control loop. This work will contribute a critical building block to the overall ASIC design while also serving as a case study in open-source analog IC design workflows.

The amplifier is tailored to meet the feedback stability and performance specifications of the LED driver system operating within a 5 V output and 18–36 V input range.

In the section detailing buck converter control design (especially the voltage-mode control loop), [1] focuses on:

- A transconductance amplifier used as the error amplifier
- High open-loop gain
- A clear emphasis on stability, bandwidth, and linear range
- In most cases, the paper assumes low voltage domain
- The architectures shown are two-stage OTAs or folded cascode for high PSRR

Final Take:

Folded Cascode OTA (see Figure 3.1) is very much aligned with [1] methodology, especially if our focus is on:

- A high-gain, linear, feedback-stage amplifier
- Working within 1.5V analog domain
- Dealing with moderate capacitive loads (e.g. compensation network / VCOMP node)
- [1] doesn't enforce one architecture rigidly, but the characteristics described match folded cascode best.

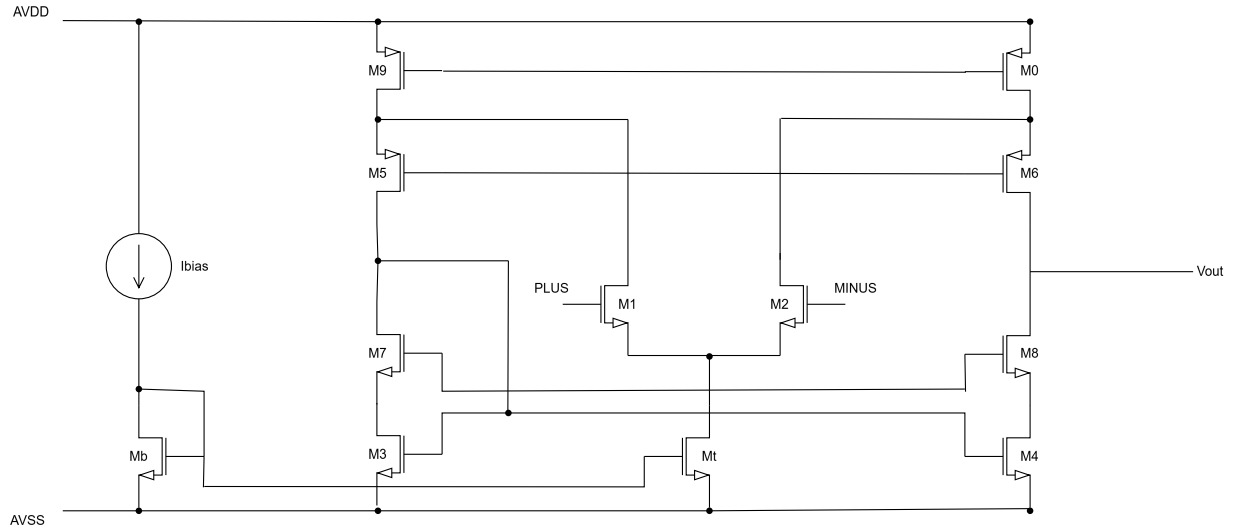


Figure 3.1.: Topology

Table 3.1.: Finalised Specifications

Parameter	Target Value
Bandwidth	> 1 MHz
Phase Margin	> 60°
Power Supply	1.5 V (AVDD)
Load Capacitance	~1-2 pF
Power Consumption	< 1 mW

3.1. Into the design

As shown in the Figure 3.1, M_1 and M_2 are the input differential pair mosfets with $M_{5,6}$ and $M_{7,8}$ as their cascoded mosfets.

! Cascode Bias Voltage Generation

It is critically import for a stable performance across PVT that the bias voltages for the cascode gates are created in a manner that tracks variations with process, temperature, and supply voltage!

The current mirror constructed out of $M_{3,7}$ and $M_{4,8}$ is a special kind of **cascode current mirror for low-voltage operation**, also referred to as high-swing cascode current mirror [2]. This type is very often used, as it forces the V_{GS} and V_{DS} of $M_{3,4}$ to be equal, so the current mirror ratio is independent of g_{ds} .

3.2. Sizing using g_m over I_d method

In nanometer CMOS, the MOSFET behavior is much more complex than these simple models. Also, this highly simplified derivations introduce concepts like the threshold voltage or the overdrive voltage, which are interesting from a theoretical viewpoint, but bear little practical use. Modern

compact MOSFET models (like the PSP model used in SG13G2) use hundreds of parameters and fairly complex equations to somewhat properly describe MOSFET behavior over a wide range of parameters like width, length and temperature. A modern approach to MOSFET sizing is thus based on the thought to use exactly these MOSFET models, characterize them, put the resulting data into tables and charts, and thus learn about the complex MOSFET behavior and use it for MOSFET sizing.

The gm over Id methodology has the huge advantage that it catches MOSFET behavior quite accurately over a wide range of operating conditions, and the curves look very similar for pretty much all CMOS technologies, from micrometer bulk CMOS down to nanometer FinFET devices. Of course the absolute values change, but the method applies universally.

We will be using the [pygmid tool](#) which is included in IIC-OSIC-TOOLS and is basically a python version of the gm/Id starter kit from Boris Murmann.

A brief implementation of this method is available [here](#)

Following is the python notebook designed for the sizing of Foldedcascode OTA with nmos differential input pair using g_m over I_d method.

i OTA Sizing

Detailed python code for sizing can be found in *Appendix - C* and [here](#)

3.3. Complete Design and constant g_m biasing using current mirrors

Based on the sizing procedure in Section 3.2, we are ready with all the W/L ratios and able to design the complete OTA (see Figure 3.2)

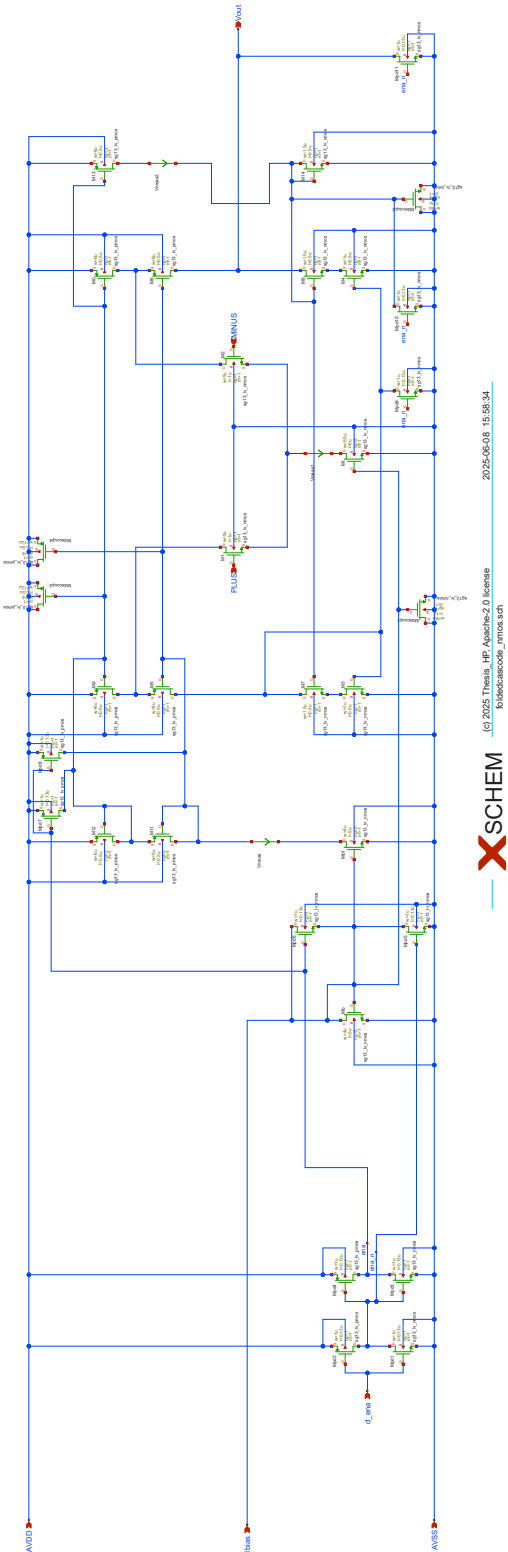


Figure 3.2.: OTA design in Xschem

Please find the schematic design [here](#).../Designs/otas/1_schematics/foldedcascode_nmos.sch

3.3.1. Discussion of the OTA Design

We will now do an analysis of the circuit design of the OTA including all the complications which make this design practical.

1. For easier navigation, the device identifier are consistent with the circuit sketch in Figure 3.2.
2. Some MOSFET dimensions are rounded to make a better fit in the IC layout. Please also look carefully at W , L , and ng . The parameter ng defines how the total W of a MOSFET should be split into individual MOSFET fingers with $W_f = W/ng$. This is done to arrive at a suitably sized MOSFET physical implementation.
3. As you can (hopefully) see the circuit is carefully drawn to ease readability. Important nets are named, text comments state certain properties like nominal voltage levels, bias currents, etc. Current sensing elements are added to directly see the dc currents in the circuit simulation.
4. The bias voltage generation for the cascodes is included as well. The voltage drop for the bottom transistors is developed by properly scaling the MOSFETs in the reference branch. We reduce the W/L ratio to increase the V_{GS} to create a voltage headroom for the bottom MOSFET.
5. Sensitive bias nodes are buffered with decoupling capacitors. We are using MOSFETs as nonlinear capacitors, which is not an issue in this application, but we value the increased capacitive density. Please note how the MOSFET are connected (some are tied to VDD while others are tied to VSS).

3.4. Simulation of the OTA

Now that circuit is ready we need to test its ac and transient behaviour as well as loop gain using Middlebrook's method and Tian's method as mention in Figure 3.3, Figure 3.5, Figure 3.7 and Figure 3.8

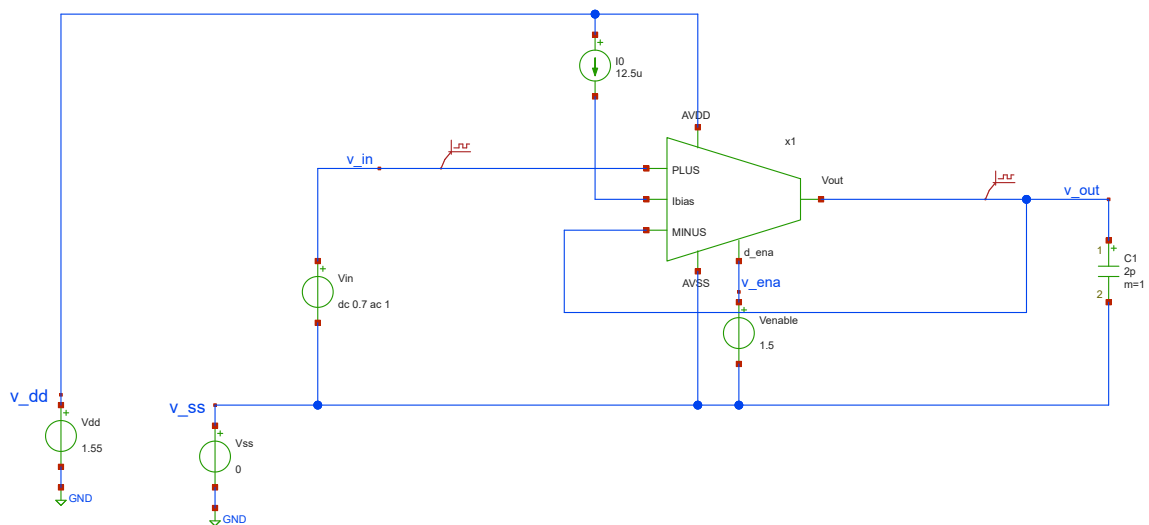


Figure 3.3.

i ngspice code for ac analysis setup

```

name=NGSPICE1 only_toplevel=true value="
.temp 27 .control option sparse save all
AC analysis
op ac dec 101 1k 1G
setplot ac1 remzerovec
Measurements on AC
meas ac dcgain MAX vmag(v_out) FROM=10 TO=10k
let f3db = dcgain/sqrt(2)
meas ac fbw WHEN vmag(v_out)=f3db FALL=1
let gainerror=(dcgain-1)/1
print dcgain
print fbw
print gainerror

plot 20log10(v_out)
plot 180/piph(v_out) vs frequency

write tb_foldedcascode_nmos_ac.raw

Noise analysis
noise v(v_out) Vin dec 101 1k 100MEG
print onoise_total

setplot noise1

write tb_foldedcascode_nmos_noise.raw

.endc"

```

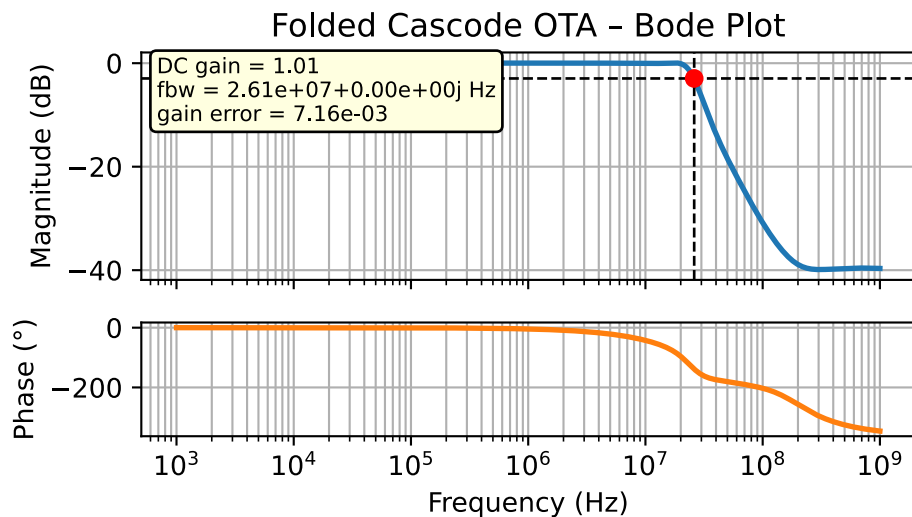


Figure 3.4.: AC Analysis Output

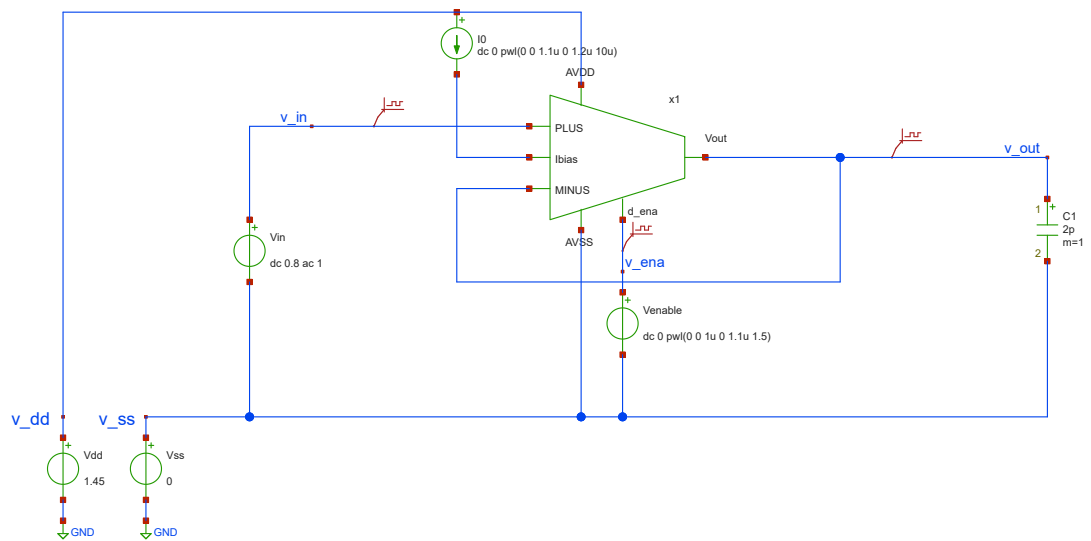


Figure 3.5.: Transient Analysis Setup

The testbench setup with ngspice code is included in the schematic
 ./Designs/otas/1_schematics/tb_foldedcascode_nmos_ac.sch

i ngspice code for transient analysis setup

```
name=NGSPICE1
only__toplevel=true
value=""
.temp 27

.ic v(v_out)=0
.option method=gear

.control
option sparse
save all

tran 0.005u 15u uic
plot v_ena v_out

* Settling time measurements
let vout_limit = 0.80.99
meas tran tcross WHEN v(v_out)=vout_limit
let vena_limit = 0.51.5
meas tran tstart WHEN v(v_ena)=vena_limit
let tsettle = tcross - tstart
print tsettle

remzerovec
```

```

write tb_foldedcascode_nmos_tran.raw
.endc

```

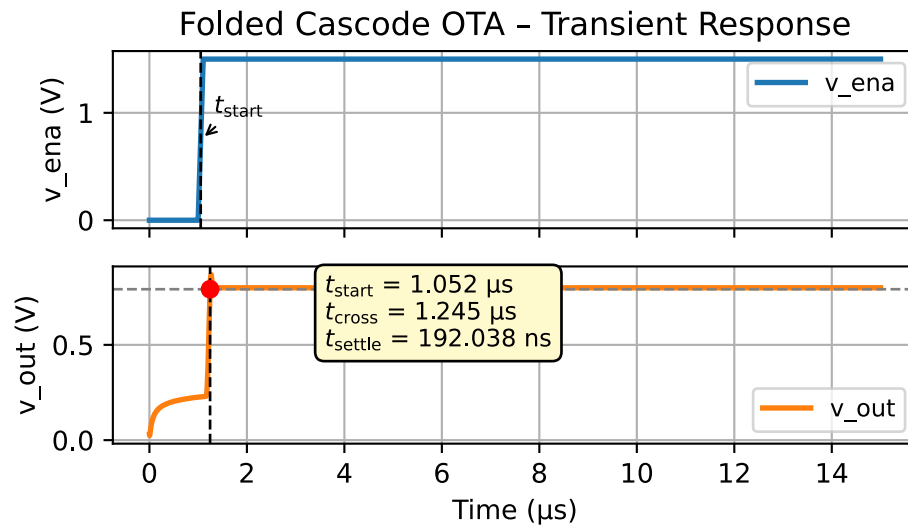


Figure 3.6.: Transient Analysis Output

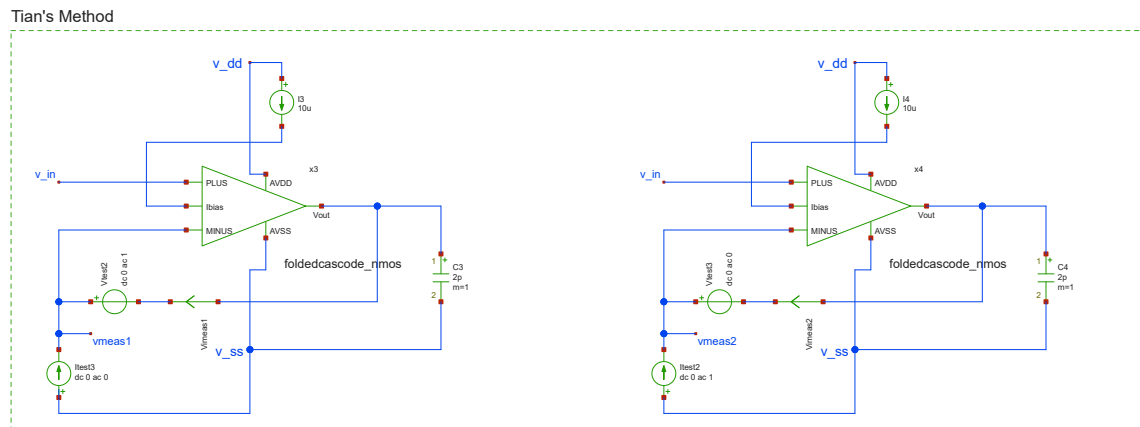


Figure 3.7.: Loop Gain Setup Tian

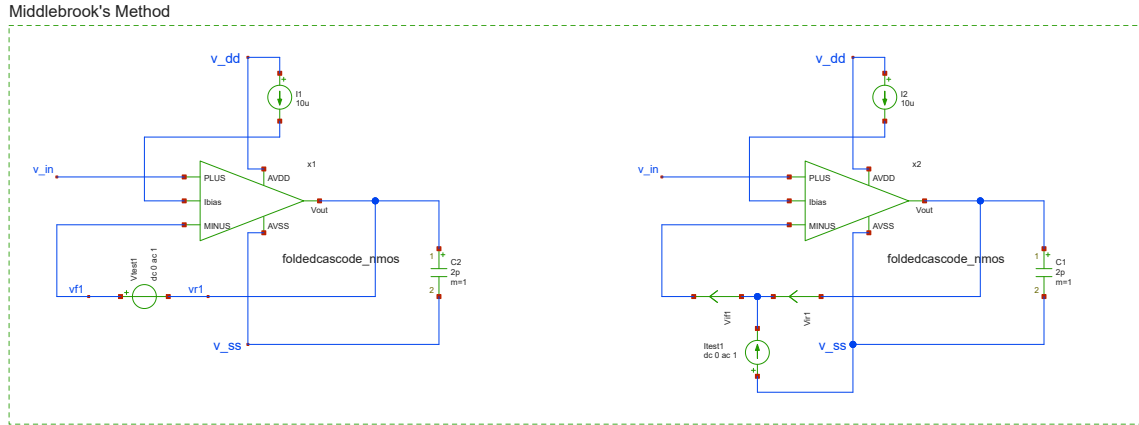


Figure 3.8.: Loop Gain Setup MiddleBrook

The testbench setup with ngspice code is included in the schematic

`./Designs/otas/1_schematics/tb_foldedcascode_nmos_loopgain.sch`

The loop gain analysis yields the following plots which clarifies that our specifications such as gain and phase margin are met successfully. See Figure 3.9 and Figure 3.10 The plots include both Middlebrook's and Tian's method for loop gain.

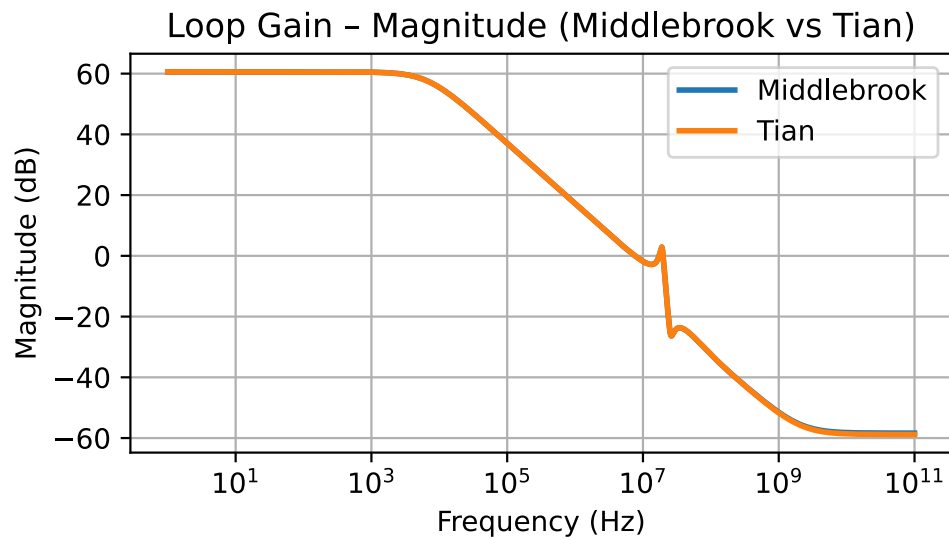


Figure 3.9.: Magnitude middlebrook vs Tian.

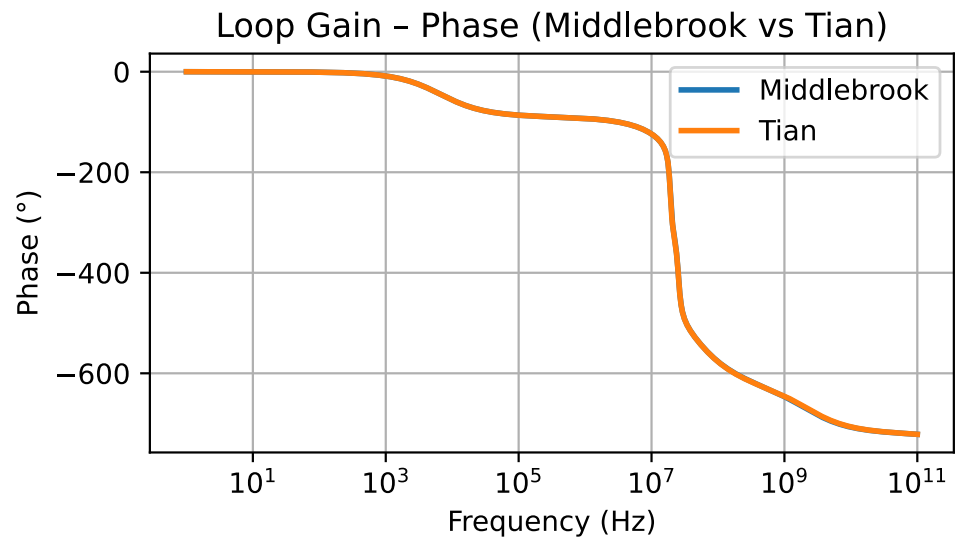


Figure 3.10.: Phase middlebrook vs Tian.

Chapter 4.

Corner Simulations for PVT and Monte-Carlo

As already discussed in Section 3.4, running every simulation manually is inefficient and time-consuming.

To properly evaluate the OTA, the design must be verified across a wide range of conditions that influence device behavior.

These conditions include:

1. **Supply voltage variations:**

Practical power supplies do not maintain a fixed nominal value. The amplifier therefore needs to be tested across the expected voltage tolerance range.[3]

2. **Temperature variations:**

Analog circuits experience significant parameter shifts across temperature. The OTA's performance must therefore be checked over its full operating temperature range.[3]

3. **Process variations:**

Due to unavoidable deviations during wafer fabrication, transistor parameters never perfectly match their ideal values.

Foundries provide *corner model files* to represent these extremes.

Since NMOS and PMOS devices vary independently, the typical CMOS process corners are: **SS, SF, TT, FS, and FF**.

All simulations performed so far used only the **TT** corner.[3]

Together, these variations form the well-known **PVT (Process–Voltage–Temperature)** space. A complete design verification requires ensuring that the OTA meets specifications across *all relevant combinations* of PVT conditions and input scenarios.

This quickly leads to a large number of simulations, each of which must be evaluated for pass/fail behavior.

To handle this efficiently, two practical strategies exist:

1. **Experience-based reduction:**

A skilled analog designer can often predict which PVT combinations are most critical using analytical intuition.

This allows the number of simulations to be reduced without compromising coverage.[3]

2. **Automated simulation runners:**

Frameworks known as *simulation runners* automate PVT exploration. They can execute large batches of simulations, check performance against specification limits, and summarize the results.[3]

For this project, we use the open-source simulation runner **CACE**.

CACE is Python-based and uses a YAML “datasheet” that defines:

- the operating conditions,
- all required analyses, and
- performance metrics with their limits.

CACE then automatically generates the required testbenches, runs all simulations in parallel, extracts results, and compiles them into documentation.[3]

A complete CACE setup exists for our OTA.

The datasheet file (`../cace/foldedcascode_nmos.yaml`) defines the simulation environment, while the corresponding testbench templates are:

- AC analysis: `../cace/templates/foldedcascode-nmos-ac.sch`
- Noise analysis: `../cace/templates/foldedcascode-nmos-noise.sch`
- Transient analysis: `../cace/templates/foldedcascode-nmos-tran.sch`

After a successful run, CACE automatically generates a detailed summary of all results.

A portion of this summary is included below:

i CACE Summary for OTA

netlist source: schematic

Parameter	Tool	Re- sult	Min Limit	Min Value	Typ Tar- get	Typ Value	Max Limit	Max Value	Sta- tus
Output voltage ratio	ngspicegain		0.98	0.996	any	0.999	1.1	1.000	Pass
Bandwidth	ngspicebw		1e6	5118320.000	any	7827360.000	any	13271000.000	Pass
			Hz	Hz		Hz		Hz	
Output voltage ratio (MC)	ngspicegain_mc		any	0.671	any	0.996	any	1.502	Pass
				V/V		V/V		V/V	
Bandwidth (MC)	ngspicebw_mc		1e6	1024950.000	any	7454465.000	any	91913200.000	Pass
			Hz	Hz		Hz		Hz	
Output noise	ngspicenoise		any	0.069	any	0.101	0.2	0.134	Pass
				mV		mV	mV	mV	
Settling time	ngspicetsettle		any	0.259 us	any	0.287 us	1.5	0.320 us	Pass
							us		

CACE also produces Python-based plots for each PVT corner and Monte-Carlo run.

The full set of generated plots for our OTA is available in the repository:

`../cace/_docs/foldedcascode_nmos_1/foldedcascode_nmos/schematic`

As an example, the figure below shows the **Noise vs. Corner** plot:

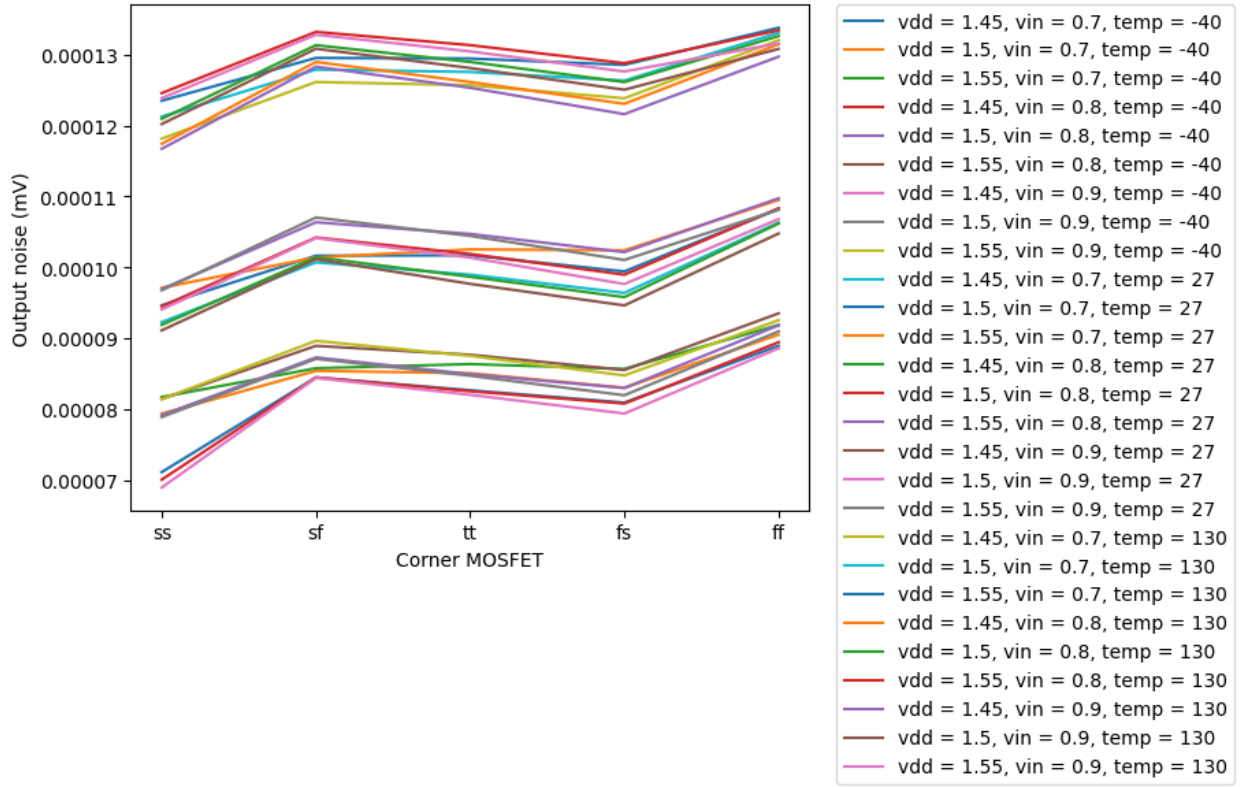


Figure 4.1.: noise_vs_corner

The results of these analyses can be compared to the required voltage-buffer specifications listed in Table 4.2.

Table 4.2.: Voltage buffer specification

Specification	OTA	Unit
Output voltage error	< 1	%
Total output noise (rms)	< 0.15	mV _{rms}
Supply current (as low as possible)	< 14	μA
Turn-on time	< 0.4	μs
Externally provided bias current (nominal)	14	μA

Part II.

Physical Design

Chapter 5.

Introduction to Layout

Once, schematic in **Xschem** is finished, what we have is only the functional intent of the circuit. At this stage the devices are ideal: transistors have exactly the width and length we assign, wires have zero resistance, and parasitics like source/drain capacitances or coupling between metals are invisible. The layout stage is where this abstraction becomes **real silicon geometry**. Here, every transistor must be drawn in the technology's layers, with actual fingers, source/drain contacts, guard rings and no component is ideal anymore.

For analog circuits, this step is critical. Small layout choices for example, placing two input devices slightly asymmetrically, or routing one input longer than the other can directly show up as offset voltage or degraded common-mode rejection. In digital design, such effects are often absorbed by logic thresholds, but in analog design they decide whether the OTA meets its simulated gain or not.

In other words, schematic defines “*what we want*”, layout decides “*what we actually get*”. This chapter focuses on showing how a *folded-cascode OTA* in **IHP-SG13G2** was translated from a verified schematic into a manufacturable layout that still respects matching, symmetry, and parasitic limits.

5.1. Layout Toolchain: KLayout

For the layout implementation, we relied on *KLayout*. It is a free, scriptable editor that is already integrated with the **IHP-SG13G2 open-source PDK** and provided in the **IIC-OSIC toolchain**. This makes it possible to perform layout tasks without the need for commercial software.

All necessary files such as **Design Rule Checks (DRC)**, **LVS comparison setups**, and **Parameterized cells (PCells)** are directly accessible and supported within KLayout. This allows devices to be generated, verified, and extracted in a reproducible way.

For further details, see the [KLayout website](#).

i Using KLayout: Docker vs. Source Build

Our layout work was carried out using **KLayout v0.30.1**, provided within the **IIC-OSIC Docker image**. Since this image is a prebuilt package, some advanced KLayout or Qt features may not function as expected.

If KLayout is build from source on your system, most of these limitations disappear, but in that case **IHP-SG13G2 technology files and libraries** must be manually integrated the into your local setup.

For guidance on this process, a useful resource is this [Efabless tutorial \(second section by Thomas Perry\)](#).

Chapter 6.

Device-Level Layout Concepts

Integrated circuit layout translates the schematic into **physical layers** on silicon.

The IHP-SG13G2 process provides numerous layers such as active/diffusion regions, poly gates, contacts, multiple metal levels, and passivation. [4]

Each of these layers plays a role in forming MOSFETs, capacitors, resistors, and interconnects, further layer specific description for the IHP PDK can be found on Layout Rules [4].

Unlike digital design, where the goal is mainly connectivity, analog layout must ensure **matching, symmetry, and parasitic control**. This is particularly critical in our **folded-cascode OTA**, where the differential input pair, current mirrors, and cascode devices dominate the overall gain, offset, and common-mode rejection ratio (CMRR). [5], [6]

The following subsections describe the major device-level layout techniques used in this work, with examples and figures suggested for illustration.

6.1. Matching & Symmetry

In real silicon, device characteristics are never perfectly uniform across the die.

Process gradients arise during fabrication due to variations in temperature, pressure, and material distribution. These gradients can be visualized using concepts similar to **isobars** (lines with constant mechanical pressure) or **isotherms** (lines with same temperature), where physical properties gradually shift across the wafer surface [6].

Such gradients directly affect threshold voltage, mobility, and oxide thickness. As a result, two transistors with identical schematic dimensions may behave differently if placed at different positions on the chip. For analog circuits like OTAs, these mismatches degrade input offset, gain, and common-mode rejection ratio (CMRR). In Figure 6.1, adapted from [6] thermal gradients caused by non-uniform heat distribution across the chip area. Best practice is to place the devices along the same isotherm.

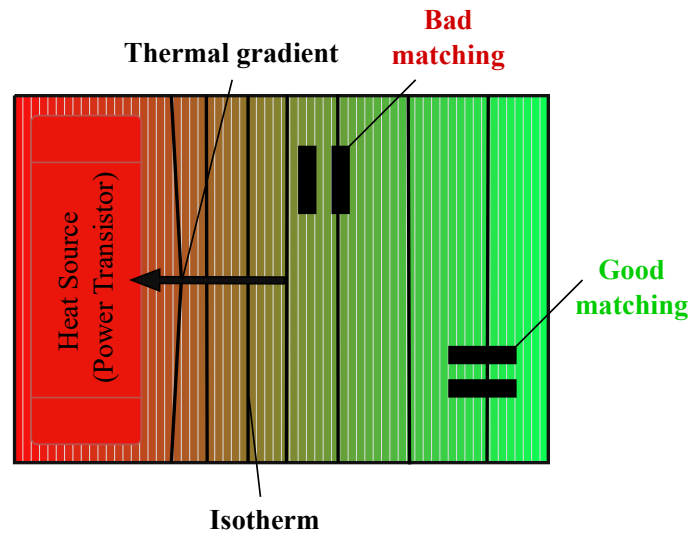


Figure 6.1.

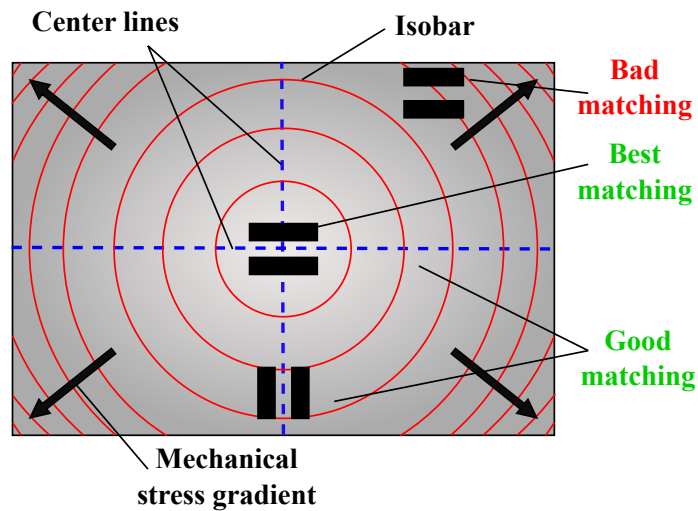


Figure 6.2.: Contradictory to above gradient in mechanical stress high gradient area should be avoided such as corners and devices should be placed closer to chip center lines (adapted from [6]).

To minimize this, layout must enforce **symmetry**:

- **Symmetry around an axis.**

Devices intended to operate as pairs, such as the OTA differential input transistors, are placed symmetrically about a central axis. This ensures that any linear process gradient affects both devices equally, preserving balance in their electrical behavior.

- **Symmetry in current flow.**

Symmetry is not only geometrical but also electrical. The orientation of source, drain, and gate terminals is arranged so that current flows through matched devices in identical directions. This prevents systematic mismatches introduced by unequal diffusion edge proximity or channel orientation.

Together, these forms of symmetry improve **matching** the ability of two devices to exhibit nearly identical electrical performance. Accurate matching is critical in the OTA's input stage, where small imbalances directly appear as input offset voltages.

Finally, symmetry must extend to the **routing**. Interconnect lengths, widths, and via stacks must be balanced on both sides of the differential pair. Even with well-matched devices, asymmetric wiring can introduce additional resistance and capacitance, which shows up as systematic offset or degraded bandwidth [5], [6].

In our OTA layout, routing symmetry was not only maintained in terms of path length and via balance, but also extended to the **choice of metal layers**. Long interconnects were assigned to **higher metal layers** with lower sheet resistance, while short local connections remained on **lower metals** for compact access.

This combination of length balancing, via symmetry, and layer assignment ensured that both differential branches exhibited comparable parasitic resistance and capacitance, preserving matching despite unavoidable topological constraints.

6.2. Multi-Fingering

When MOSFETs are designed with very wide channel widths, implementing them as a single continuous device introduces several problems. A long, uninterrupted polysilicon gate line introduces significant **polysilicon gate resistance**, which degrades high-frequency behavior and increases phase delay. At the same time, the enlarged diffusion regions lead to higher source and drain junction capacitances, creating substantial loading on sensitive circuit nodes. Finally, wide monolithic devices suffer in terms of matching: process gradients across the active area are no longer averaged, making these devices more vulnerable to systematic variation and random mismatch effects [5], [6].

The solution is **multi-fingering**: dividing the wide transistor into several narrower, identical fingers that are connected in parallel. This segmentation reduces gate resistance (shorter poly stripes), distributes junction capacitances more evenly, and improves statistical matching by averaging across multiple smaller units.

In our OTA, the **tail current source** required a total width of 8.5 μm . Instead of realizing it as a single device, it was split into **four fingers of 2.125 μm each**. This segmentation reduced the distributed gate resistance, improved current uniformity, and made gate routing more compact and symmetrical, while maintaining acceptable junction capacitance at the high-impedance tail node. Similarly, majority of transistors were implemented in multi-finger form to balance parasitic capacitances and maintain symmetry across branches.

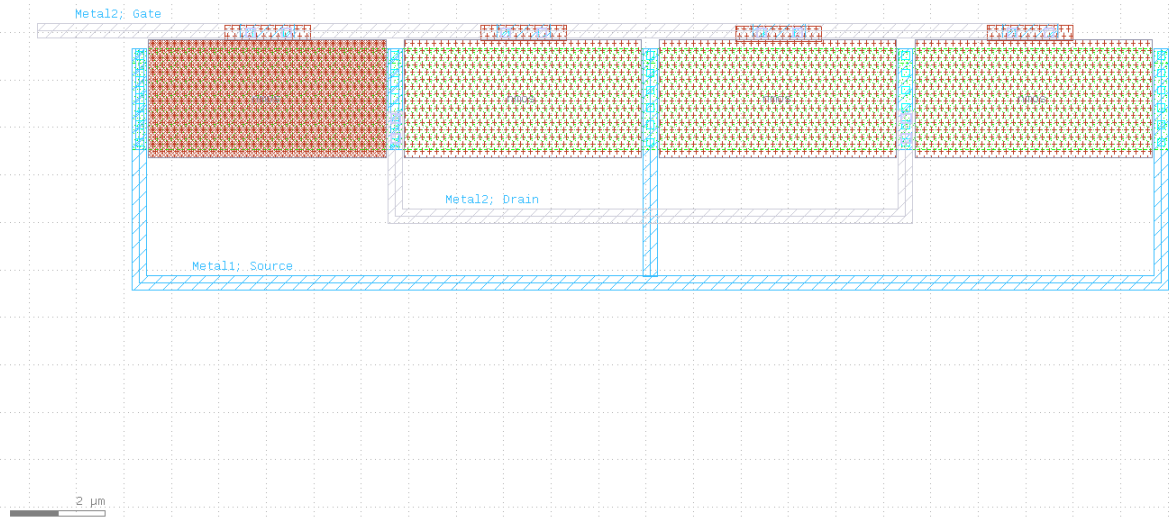


Figure 6.3.: Represents the tail transistor in our layout with 4 fingers instead of one huge block lead to well matched layout with other transistors and clean routing.

Despite its benefits, multi-fingering comes with trade-offs:

- **Increased routing overhead**, since all fingers must be tied together with well-balanced interconnect.
- **Extra junction perimeters**, which can increase total parasitic capacitance if the layout is not compacted carefully.
- **Via placement sensitivity**, as each finger requires source/drain contacts and vias; poor via distribution can lead to resistance mismatches or electromigration concerns. Using 2 vias is always recommended.[6]

For this reason, multi-fingering is often combined with other layout strategies.

Dummies are placed at the array edges to shield active fingers, while **common-centroid arrangements** may be used for further gradient cancellation. This combined approach was applied in our OTA's diffpair, ensuring both parasitic reduction and high matching fidelity.

i How to calculate minimum number of fingers

Determining the appropriate number of fingers for a wide MOSFET is not arbitrary; it requires balancing several parasitic and physical effects.

As excessive fingering increases total diffusion perimeter and further elevating the total source/drain junction capacitance.

Therefore, selecting the *minimum* number of fingers that satisfies these electrical and physical constraints is essential for achieving optimal analog performance.

A rigorous methodology for estimating this minimum finger count considering gate resistance limits, diffusion capacitance contributions, layout symmetry, and manufacturability is presented in **Section 7.6: Finger Count Estimation**, where all the equations and procedures are discussed in detail.

6.3. Dummy Devices

Even when multi-fingering is used, the **edge fingers** of a device array experience different fabrication conditions compared to the inner fingers. At the boundary between active diffusion and isolation (STI), variations in oxide growth, stress, and implant profiles create **edge effects** that change threshold voltage, carrier mobility, and junction capacitance [5].

If left unaddressed, these systematic differences degrade device matching, particularly in sensitive analog structures such as the OTA input pair or current mirrors.

To eliminate this, **dummy devices** are placed at the ends of transistor arrays. They act as sacrificial neighbors, ensuring that all *active* devices are surrounded by identical environments.

This makes the inner devices more uniform, effectively shielding them from edge-related mismatches.[6]

Connection of dummy devices can vary across design flows:

- In some methodologies, dummy gates are left **floating**, since their only role is geometric.
- In others, dummies are **tied to supply rails** (AVDD or AVSS) to avoid LVS errors and ensure consistent recognition by verification tools.

In our OTA, Dummy devices were placed at the edges of all the MOSFET's. This ensured that all transistors within the OTA operated in well-matched environments, minimizing systematic offset.

! Important Implementation Note

In our OTA layout, dummy devices were implemented as **complete MOSFETs** with their gates explicitly tied to **AVDD** or **AVSS**.

This was necessary because in **KLayout**, adding an extra finger with an unconnected gate/source/drain is not recognized as a dummy. LVS then fails due to netlist mismatches.

To ensure **LVS clean results**, we:

- Added dummy devices explicitly in the schematic.
- Connected all terminals to valid nets.
- Replicated the same connections in layout.

6.4. Interdigitated Layout

When two matched transistors are placed adjacent to each other but in separate diffusion regions, each device is exposed to a slightly different portion of the process gradient across the chip. As a result, parameters such as threshold voltage, carrier mobility, and oxide thickness vary between them, leading to a systematic mismatch even though both devices have identical drawn dimensions.

The **interdigitated layout technique** addresses this issue by physically alternating the unit devices of a matched pair or array. Instead of grouping devices as AABB, the transistors are arranged in an alternating or mirrored pattern such as **ABAB** or **ABBA**, where *A* and *B* represent identical unit devices belonging to two matched elements.

Through this alternating placement, each device is spatially distributed across the gradient, allowing it to experience regions of both higher and lower process variations. As a result, the local fabrication differences are **averaged** out across all unit fingers, and the two devices become physically and electrically better matched under real process conditions.

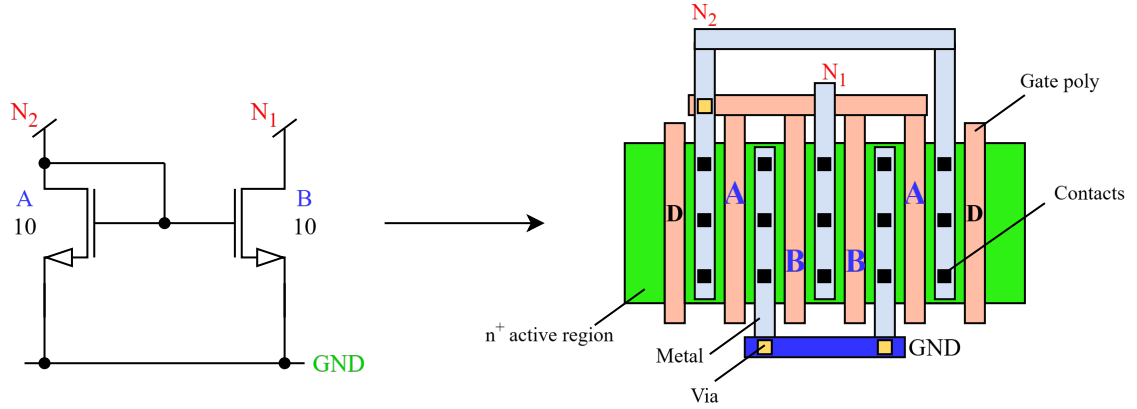


Figure 6.4.: Shows the interdigitated layout pattern “ABBA” (right) of current mirror schematic of NMOS-FETs with current ratio 1:1(left). The “D” gates in layout represent the Dummy transistors.[6]

This concept can be visualized by imagining a linear gradient across the x-axis of the die. If one device occupies the left region and the other the right, they sample distinct gradient values. However, when their unit fingers are interleaved, each device occupies multiple local regions along the gradient, resulting in matched *average parameters*.

In practice, interdigitation is most effective for **linear process gradients** along one direction and is often used for **matched transistor pairs, current mirrors, or differential input stages**. For two-dimensional gradients or more complex variations, this technique is typically extended using **common-centroid placement** (discussed in the next section).

In the folded cascode OTA, **interdigitation** was applied to the active loads and bias current mirrors. This layout ensured that each mirrored transistor experienced an equivalent average doping and oxide thickness, resulting in better current matching, symmetrical output swing, and reduced systematic offset in bias generation.

6.5. Common-Centroid Layout

While interdigitation cancels **first-order linear gradients** along a single direction, it cannot fully correct for **two-dimensional or higher-order variations** such as diagonal gradients or wafer-level curvature. For more advanced matching requirements such as in precision current mirrors or differential pairs in high-gain OTAs **common-centroid layout** is used.

In a common-centroid configuration, matched devices are arranged so that their geometric centers, or **centroids**, coincide. Each device is distributed symmetrically around a central point such that any gradient whether horizontal, vertical, or diagonal affects both devices equally when averaged over their area. This approach effectively cancels first-order gradient components in both axes and reduces second-order effects as well [6].

Conceptually, the centroid layout extends the interdigitated approach into two dimensions. For example, four identical transistors can be arranged symmetrically around a central point in an AB/BA pattern, forming what is effectively a square or cross-shaped configuration.

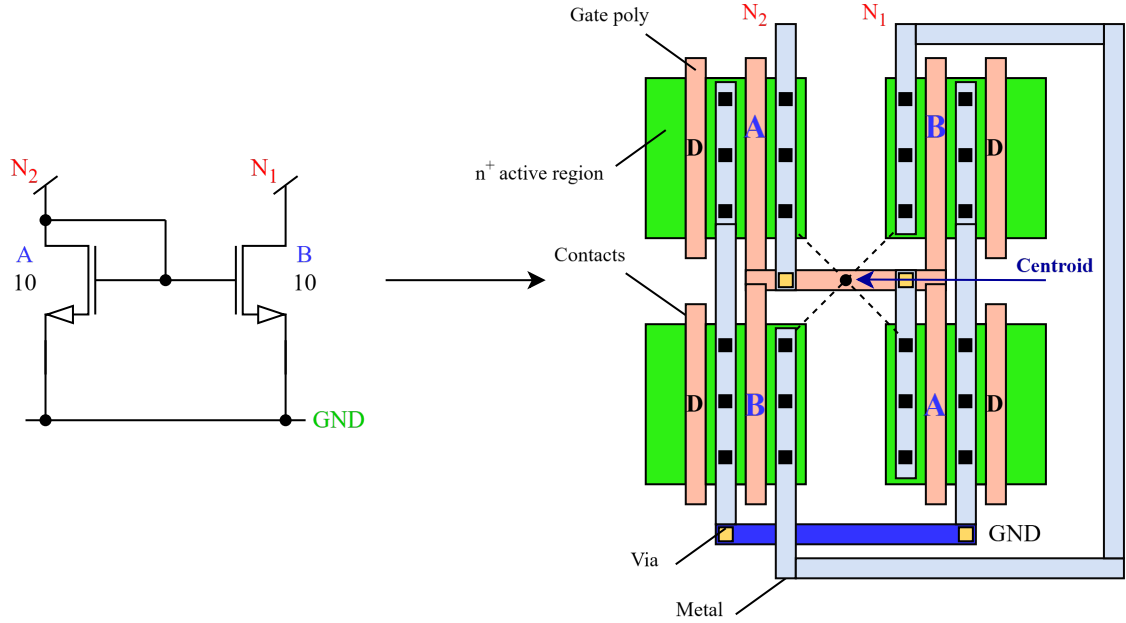


Figure 6.5.: Illustrates how common centroid configuration can be achieved (right) of current mirror schematic of NMOS-FETs with current ratio 1:1(left). It's clear that devices are extremely symmetrical along X-and Y-axis, however routing always introduces some asymmetry which can be neglected for time being. Here, space is intentionally left between transistors for clear visuals and understanding. The “D” gates in layout represent the Dummy transistors.

Although each individual finger occupies a slightly different position on the chip and therefore a slightly different local environment the geometric center (centroid) of all devices coincides. This ensures that the averaged electrical properties of each device are identical, effectively cancelling first-order process gradients across both axes.

In our folded-cascode OTA, the **diff pair** was laid out using a **common-centroid pattern** derived from the AB/BA principle. This was essential to maintain current accuracy and minimize systematic gain variation.

The layout ensured that matched transistors experienced a balanced environment, even in the presence of lateral thermal gradients or stress gradients from nearby metal density variations.

Routing Considerations:

Achieving symmetry in interconnect is as critical as maintaining symmetry in device placement. In principle, identical path lengths, matched metal layers, and mirrored via distributions help ensure that the parasitic resistances and capacitances experienced by paired devices remain equal. However, practical experience reveals that *strict geometric symmetry does not always translate into optimal electrical symmetry*, especially in multi-metal processes such as IHP-SG13G2.

A notable observation from our layout work illustrates this point clearly. In most of tech nodes including IHP-sg13g2 lower metal layers (Metal1, Metal2) exhibit **higher sheet resistance**, they are typically used for short internal routing, while upper metals provide lower resistance and reduced coupling.

In an attempt to maximize matching, the initial differential-pair routing was implemented almost entirely on the lowest metal layers (Metal1 and Metal2), with perfectly mirrored path lengths and identical layer usage on both branches. Although geometrically symmetric, this approach resulted in **severe performance degradation**: the differential pair failed to operate correctly.

Post-layout analysis revealed that the close proximity of long parallel segments on the same

or adjacent lower metal layers introduced **excessive lateral and broadside capacitances**, overwhelming the high-impedance input nodes and collapsing the expected differential behavior.

This led to a revised routing strategy grounded in parasitic-aware symmetry rather than purely geometric symmetry. The final solution employed a combination of **Metal1, Metal2, and Metal3**, arranged such that the two branches remained electrically matched but **did not rely on identical metal layers running in close parallel**. Where parallelism was unavoidable, routing was staggered (e.g., $Metal_n$ with $Metal_{n+2}$) to reduce capacitive coupling.

This parasitic-conscious routing produced a substantial improvement in OTA performance, restoring gain and achieving stable differential operation.

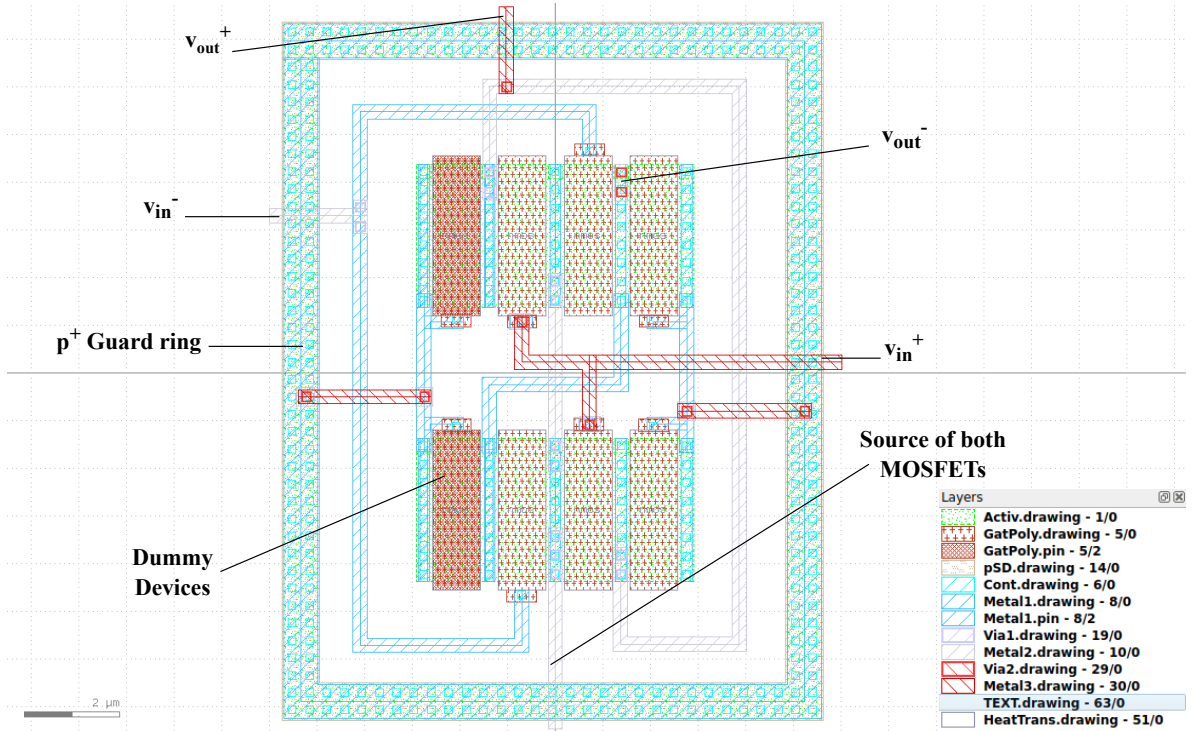


Figure 6.6.: Modified Layout of OTA's Differential Pair with labelled terminals. All used layers are described in bottom-right corner. The box around the pair is called Guard Ring which is tied to VSS, also acts as body terminal for all the devices and is explained in Chapter - *Parasitics and Prevention*.

These findings highlight that in precision analog layout, **symmetry must be interpreted electrically, not only geometrically**. Effective matching requires an awareness of sheet-resistance gradients, metal-layer coupling, and the spatial distribution of parasitics.

Meticulous routing decisions layer staggering, spacing, orthogonality, and controlled via placement often determine whether a differential structure performs ideally or fails entirely.

6.6. Finger Count Estimation (Minimum Number of Fingers)

This section establishes a systematic method for estimating the **minimum number of fingers** N_f required for a wide MOSFET such that

- (i) the **distributed gate resistance** remains below acceptable limits, and
- (ii) the **junction capacitances** introduced by segmentation do not dominate the node dynamics.

The methodology follows the classical treatment of **gate resistance**, **thermal/gate noise**, and **diffusion capacitance scaling** described in [7], [8].

For a device with total drawn width W_{tot} and channel length L , splitting the device into N_f identical fingers results in an effective per-finger width

$$W_f = \frac{W_{tot}}{N_f}.$$

Selecting N_f is therefore an exercise in determining how narrow each finger can be made before device performance becomes degraded by source drain capacitance, or minimum-geometry constraints.

The following design principles guide the estimation procedure:

6.6.1. Gate Resistance Requirement (Low-Noise Criterion)

As a practical thumb rule used in low-noise analog design:

Each finger width W_f must be chosen such that the **gate resistance** of that finger is **less than** the inverse transconductance $1/g_m$ associated with that finger.
For high-performance or low-noise applications, the gate resistance should preferably be in the range of

$$R_g < \frac{1}{5g_m} \quad \text{to} \quad R_g < \frac{1}{10g_m}$$

This condition ensures that the **gate thermal noise contribution** remains significantly below the **channel thermal noise**, preventing degradation of input-referred noise or gain.[8]

Basically, we compare the **channel thermal noise** with the **gate-resistance thermal noise**, and we solve to get the value of N_f ensuring that gate noise remains well below channel noise.

Channel noise:

$$\overline{v_{n,ch}^2} = \frac{4kT\gamma}{g_m}$$

Gate-resistance noise:

$$\overline{v_{n,g}^2} = \frac{4kTR_{sheet}W}{3LN_f^2}$$

where,

- k is Boltzmann's constant,
- T is the absolute temperature,
- γ is the noise factor
- g_m , W & L are the transconductance, width and length of the device.

In our application, Channel noise is 5 times that of Gate-resistance noise.

6.6.2. Noise Model Adjustment Based on Channel Length

The optimization also depends on the **noise coefficient** γ in the MOSFET thermal noise model. The correct value of γ depends on the channel length:

- If $L < 3 \times L_{min}$, then $\gamma = 1$
- otherwise, $\gamma = \frac{2}{3}$

Because shorter-channel devices exhibit stronger velocity saturation and increased thermal noise.

6.6.3. Minimum Geometry Constraint

The number of fingers must also satisfy:

$$\frac{W_{tot}}{N_f} > L_{min},$$

because excessively narrow fingers approach the **minimum manufacturable width** and exhibit strong proximity effects, increased mismatch, and higher perimeter capacitance.[7] For the IHP-SG13G2 130-nm process used here, as the name suggests the minimum channel length is:

$$L_{min} = 0.13 \mu m.$$

This constraint prevents unrealistic fingering.

6.6.4. Even Number of Fingers (Practical Layout Consideration)

Although electrically permissible, **odd-valued finger counts** typically complicate routing and disrupt symmetry. Although in fewer cases odd numbered fingers are used as well.

But, a practical recommendation particularly in differential or current-mirror structures is:

Choose the **minimum even number of fingers** N_f that satisfies the electrical and geometrical constraints. Even segmentation simplifies mirrored routing, centroid or interdigitated arrangements, and guard ring alignment.

i Number of fingers Calculation using Python Script

To support the design methodology described above, a dedicated **Python script** has been developed to automatically compute the **minimum number of fingers** required for any given MOSFET width.

The script implements the **thumb-rule constraints** introduced above. By providing required parameters, the script outputs the **minimum feasible even-valued** N_f that satisfies all electrical constraints.

The detailed path for script can be found in *Appendix - C*.

Chapter 7.

Design Rule Checking (DRC)

The transition from an electrical schematic to a manufacturable integrated circuit relies on the integrity of the **layout**, which represents the true physical interface between design and fabrication. While schematic-level verification ensures functional correctness and circuit performance, it is the layout that determines whether the circuit can be fabricated reliably within the limits of the chosen process.

To formalize and automate this verification, the semiconductor industry have **Design Rule Checking (DRC)** a systematic comparison of the layout geometry against a set of process-specific constraints provided by the foundry or technology provider (in our case IHP-PDK Authors).

7.1. Fundamentals of DRC

Design Rule Checking is a geometric verification step that ensures a layout adheres to the **minimum/maximum feature sizes, spacings, enclosures, and overlaps** defined by the fabrication process.

Each layer in a modern BiCMOS process (e.g. diffusion, polysilicon, metal interconnects, and vias) is subject to numerous rules derived from the physical limitations of photolithography, etching, and deposition steps.

Violating these constraints can lead to a spectrum of manufacturing defects: short-circuits due to over-etching, open connections caused by lithographic line thinning, or parametric variations resulting from disuniform film growth.

Thus, DRC forms the **first line of defense** against non-manufacturable or yield-critical layouts.

The design rules themselves originate from **process specifications**. Foundries experimentally determine the tolerances of their technology through test structures that measure lithographic resolution, etch bias, and alignment accuracy between layers. From these experiments, statistical margins are extracted and translated into deterministic layout constraints expressed as rules such as *minimum Active width = 0.15 μm* or *minimum spacing between Metal1 lines = 0.18 μm* . [4] As discussed in [6], these rules balance manufacturability with design density: tighter rules enable compact designs but raise the risk of yield loss, while relaxed rules increase process robustness at the expense of silicon area.

7.2. Technology Dependence and Process Node

Every **technology node** for instance, 130 nm, 65 nm, or 28 nm defines its own set of DRC parameters. These parameters evolve with advances in lithographic precision, material systems, and transistor architecture. At older nodes such as **0.35 μm or 0.25 μm** , DRC rules mainly governed planar dimensions and spacing; however, in sub-100 nm processes, additional considerations such as **antennas, stress effects, and metal density gradients** are incorporated. Consequently, the complexity of DRC rules increases exponentially as the process geometry scales down.[5]

The **Process Design Kit (PDK)** serves as the bridge between the foundry and the design environment.

It encapsulates all technology-specific information design rules, layer definitions, device models, parasitic extraction parameters, and layout-Vs-schematic (LVS) configurations into a single framework usable by EDA tools.

The DRC deck, which is a formalized file (often written in languages such as SVRF or Python-based scripts for tools like KLayout), encodes these geometric constraints in machine-readable form. When the layout is processed through the DRC engine, each polygon and layer is algorithmically compared against the rule database to identify violations.

In the case of the **IHP SG13G2 130 nm BiCMOS process**, used throughout this work, the *IHP-PDK* provides a comprehensive DRC rule set defining all critical geometrical limits from diffusion-to-diffusion spacing and via enclosures to hierarchical density checks of upper metal layers, [4]. The *IHP-PDK* also supplies detailed technology definition files that can be manually integrated into layout tools such as KLayout. However, since the *IHP-PDK* is part of the *IIC-OSIC* open-source toolchain, these technology files and rule decks are already pre-configured within the provided Docker image, offering an optimized and reproducible setup for DRC verification.

In addition, the PDK documentation includes a complete layer table defining all process layers, along with descriptions of forbidden layers reserved for internal fabrication use, grid rules, and the full list of DRC constraints illustrations. This document has served as the primary reference for understanding the process and implementing all layout structures in this work. Hence, even within an open-source environment, the design remains **foundry-compliant**, physically realizable, and fully aligned with the manufacturing specifications of the SG13G2 process.

7.3. Importance in the Design Flow

DRC plays a pivotal role in ensuring that the **layout is not only electrically correct but physically manufacturable**.

As mentioned before, an unverified layout might pass all functional and electrical simulations yet still fail in fabrication because certain features violate lithographic limits or introduce yield-limiting defects. Typical examples include insufficient metal spacing leading to shorts, or inadequate enclosure of contacts resulting in open circuits after etching.

By enforcing DRC compliance before tape-out, the designer ensures that the design adheres to the **design-for-manufacturability (DFM)** principles required for reproducible production.

Furthermore, DRC compliance is not merely a binary condition of “pass or fail.” It also acts as a **metric of process awareness**: a DRC-clean layout demonstrates the designer’s adherence to technology constraints and reflects a realistic understanding of fabrication tolerances. In professional design flows, foundries refuse to fabricate any layout that fails DRC, as doing so would waste mask costs and process time.

Therefore, DRC stands as the final checkpoint between design creativity and physical implementation a gate that ensures the **logical intent of the schematic can manifest in silicon without violation of the underlying physics**.

7.4. Practical Implementation of Design Rule Checking

As discussed in earlier chapters, the **layout is the sole design entity that directly communicates with fabrication**. Neither schematic diagrams nor behavioral models ever reach the foundry only the geometric database (typically in GDSII or OASIS format) generated from the layout is delivered for mask generation and processing.

In this sense, **Design Rule Checking (DRC)** serves as the mechanism through which the *language of design* is translated into the *language of manufacturing*. It guarantees that every transistor, interconnect, and via is drawn within the lithographic and etching tolerances established by the process technology. This alignment between layout geometry and process capability is essential to

achieving both functional yield and long-term device reliability.

To borrow the phrasing of [5], “*a perfect schematic means nothing without a correct layout.*”

DRC ensures that this correctness is quantifiable and verifiable it enforces the discipline that transforms circuit theory into a physically reproducible artifact, one capable of moving confidently from layout database to wafer fabrication.

In this work, all DRC verification was performed using **KLayout** as part of the **IIC-OSIC open-source toolchain**, which integrates the **IHP SG13G2 130 nm BiCMOS process**. The PDK provides complete DRC rule decks in the form of Python-based macros that systematically check every process layer and layer combination diffusion overlaps, via enclosures, contact spacings, metal width and density requirements, and top-metal clearance to the passivation opening.

The DRC engine performs a hierarchical scan of the layout, flags any violations, and displays annotated markers directly within the KLayout interface for review. Each violation encountered during the layout phase was analyzed and corrected at either the device or routing level until the design achieved a fully **DRC-clean status**. This verified layout therefore not only satisfies the intended schematic connectivity but also conforms to every **physical constraint required for successful fabrication**. Through this process, DRC validation in KLayout establishes the final and most critical bridge between the abstract world of circuit design and the tangible reality of silicon manufacturing where compliance with foundry rules ensures that what is drawn can, indeed, be built.

7.4.1. Types of DRC Scripts in the IHP SG13G2 Process

The **IHP SG13G2 PDK** provides two distinct DRC scripts, each corresponding to a specific level of design compliance and verification rigor. These scripts are referred to as **sg13g2_minimal** and **sg13g2_maximal** rule decks. Both are written as Python macros configured within the KLayout environment and can be executed directly from the *Macros Development* interface.

1. The **sg13_g2_minimal DRC deck** enforces the *standard design rules* of the process: These rules define the **mandatory fabrication constraints** that must be satisfied to ensure the layout is physically manufacturable. Violations of these checks typically indicate errors that could prevent successful chip production or cause fatal defects in the fabricated devices. Examples include insufficient metal spacing, missing via enclosures, or incorrect layer overlaps. List of minimal rules can be found [here](#).
2. The **sg13_g2_maximal DRC deck**, in contrast, applies the *recommended design rules*: These rules contain both **mandatory fabrication constraints** and **non-mandatory** therefore are intended to improve overall **manufacturability, process reliability, and yield consistency**. They provide design hints to minimize parametric variability, such as improving parasitics, preventing latch-ups, or avoiding angles that can introduce stress points during fabrication. While designs that only pass the minimal check are still fabricable, running the **sg13_g2_maximal** script ensures the layout adheres to **best practices** for long-term robustness and high-yield performance. List for maximal rules can be found [here](#).

7.4.2. Performing DRC in KLayout

As mentioned in the *Known Issues* section, DRC cannot be executed in KLayout solely by relying on direct tools or commands. Instead, a specific workflow must be followed. Within the **Macros Development** interface of KLayout, there is a dedicated **DRC section** that lists all available rule scripts for the selected technology. To perform DRC, the user must select the desired rule deck either *sg13_g2_minimal* or *sg13_g2_maximal* and then execute the corresponding script.

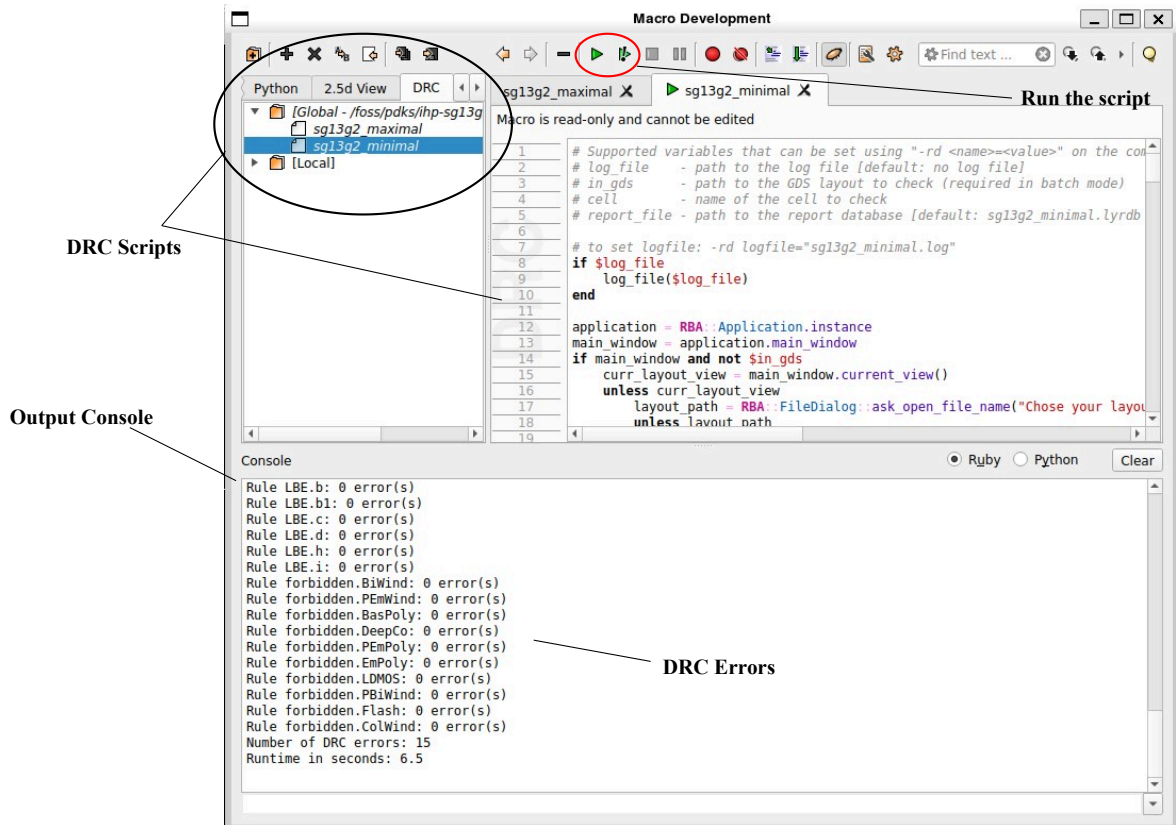


Figure 7.1.: Macro Development interface with DRC Results in Console

Once the check is complete, the list of errors appears in the **output console** below the editor window. Unfortunately, due to current tool limitations, KLayout does not automatically generate a separate **DRC report file**. This means that the error list cannot be reloaded, filtered, or revisited directly within the tool after the session ends. Furthermore, some **Qt-based interactive functions** (intended to automatically highlight or open error markers) are not fully supported within the Docker image of the IIC-OSIC toolchain.

To address this limitation, a **custom Python script** was developed in this work to automate the error-handling process. The script parses the raw DRC output copied from the KLayout console and filters the messages to produce a clean, structured list of all raised violations that require manual correction. This greatly simplifies the debugging workflow by identifying unique errors and mapping them to their respective layer categories.

7.4.3. DRC Automation Script

This is the automation script used for processing DRC results:

i Script

DRC Errors Check

This script gives 2 functions: 1st needs the the errors copied from KLayout to be pasted in drc_log function inside script and than run the script. It can be tedious to change script again and again. Therefore, not recommended.

For 2nd function just run the script and paste your errors copied from KLayout in the terminal and press enter and DONE. By default, script uses this function.

```
# 2nd Funtion

def parse_drc_errors_new():
    print(" Paste your DRC error log below. Press Enter twice to finish:")

    # Collect multiline input
    lines = []
    while True:
        line = input()
        if line.strip() == "":
            break
        lines.append(line)

    print("\n Rules with errors :")
    i=0
    for line in lines:
        if "error(s)" in line:
            try:
                rule, error_text = line.split(":")
                error_count = int(error_text.strip().split()[0])
                if error_count >= 1:
                    print(f"{rule.strip()}: {error_count} error(s)")
                    i=1

            except ValueError:
                continue

    if i==0:
        print("Congrats! No error")

# Run the parser
parse_drc_errors_new()
```

To use the script, simply copy the DRC Errors from console output from KLayout, paste it into the terminal running the Python program, and the script will generate a concise summary of the errors that remain to be corrected manually in the layout. This script could also be found in *Appendix - C*.

💡 Pro Tip Run DRC Early and Often

It is strongly recommended to run DRC checks **after every 5–6 layout modifications**, even for small routing or placement changes. This practice prevents the accumulation of undetected violations that can take hours to debug later. Running DRC frequently not only saves significant time but also prevents accidental geometry overlaps or spacing errors that could compromise the layout structure and require extensive rework.

Chapter 8.

Layout Vs Schematic (LVS)

After a layout has been verified for physical manufacturability through Design Rule Checking (DRC), the next essential step is to confirm its **electrical correctness** with respect to the original schematic. This verification step is known as **Layout Vs Schematic (LVS)**. Whereas DRC ensures that the physical geometry can be fabricated, LVS ensures that the fabricated geometry will function as intended by the circuit design. Together, DRC and LVS form the core of the **physical verification** process that bridges the logical and geometric domains of IC design.

8.1. Fundamentals of LVS

Layout Vs Schematic comparison is a **netlist-based verification process**. It compares the electrical connectivity extracted from the physical layout with that defined in the schematic. During LVS, the tool first performs **netlist extraction** from the layout (parsing all transistors, polygons, capacitors, and interconnects), and then compares this extracted netlist against the schematic netlist. The goal is to verify that both represent the same electrical circuit that is, the same devices, same connections, and identical hierarchy.

Typical checks performed during LVS include:

- **Device recognition:** confirming that every transistor or passive component in the layout corresponds to a schematic element.
- **Pin and net matching:** ensuring all connections and signal names align between the two domains.
- **Parameter equivalence:** verifying that critical parameters such as transistor width, length, and multiplicity match (number of fingers).

If all devices and nets correspond correctly, the design is said to be **LVS clean**. Otherwise, the LVS report lists mismatches that must be corrected before fabrication.

8.2. Importance in the Design Flow

While DRC ensures *how* a design can be fabricated, LVS ensures *what* will be fabricated. Even a DRC-clean layout can fail to perform correctly if a wire is connected to the wrong node, a transistor terminal is swapped, or a device is missing. Such errors may lead to functional failure, excessive power consumption, or biasing issues that are difficult to detect without LVS.

Therefore, LVS verification is critical before tape-out because it confirms the **topological equivalence** between the intended circuit (schematic) and its physical realization (layout).

It ensures that all devices, interconnects, and terminals have been represented faithfully, safeguarding against layout-level errors that could otherwise result in costly re-fabrications.

8.3. Practical Implementation

In this work, LVS verification was carried out using **KLayout** in combination with the **IHP SG13G2 PDK** inside the **IIC-OSIC Docker environment**.

However, due to the known limitation that Qt-based LVS functions do not operate within the Dockerized KLayout interface, LVS must be performed **externally in the Docker terminal** using a *Python script provided by the IHP PDK*.

i LVS Script

The LVS verification script provided with the **IHP SG13G2 PDK** can be found at:
`/foss/pdks/ihp-sg13g2/libs.tech/klayout/tech/lvs/`
 The main Python file, **run_lvs.py**, executes the complete LVS procedure.

This LVS script automates the comparison between the schematic netlist and the layout. To execute it, the user provides three key inputs:

- The **schematic netlist** (in SPICE format, generated from schematic in Xschem)
- The **layout GDSII file** (the physical design)
- The **output directory** for output file publication

Once executed, the script performs layout netlist extraction, mapping, and comparison against the schematic. It then produces several output files, typically including:

- **.lvbdb** : the LVS database containing the extracted and compared netlists with in-depth details
- **.cir** : the extracted SPICE-format netlist from the layout containing circuit description
- **.log** : the report of information such as name of files, tool version and error if encountered

i Important Naming Consistency

For LVS to run successfully, the **schematic name**, **GDS file name**, **SPICE netlist name**, and the **top-cell name** inside the GDS must all be **identical**.
 If any of these names differ, the Python script will terminate with an unexpected error because it cannot match the top-level hierarchy between schematic and layout.

8.4. Interpreting and Visualizing LVS Results in KLayout

After running the LVS script in the terminal, the generated **.lvbdb** file can be opened in **KLayout** for detailed inspection and mapping. To do this, open the corresponding GDS layout in KLayout, then navigate to:

Tools → Netlist Browser

This opens the Netlist Browser catalog window. Within this interface, load the **.lvbdb** file generated by the script. When the **.lvbdb** file is opened in the Netlist Database Browser within KLayout, a catalog window appears with four main tabs - **Netlist**, **Schematic**, **Cross Reference**, and **Log**. The Cross Reference tab displays a side-by-side comparison between the layout and reference schematic, listing all pins, nets, and devices in both domains. Matched elements are shown in

green, indicating full correspondence between schematic and layout, as illustrated in Figure below (example: analog_inverter).

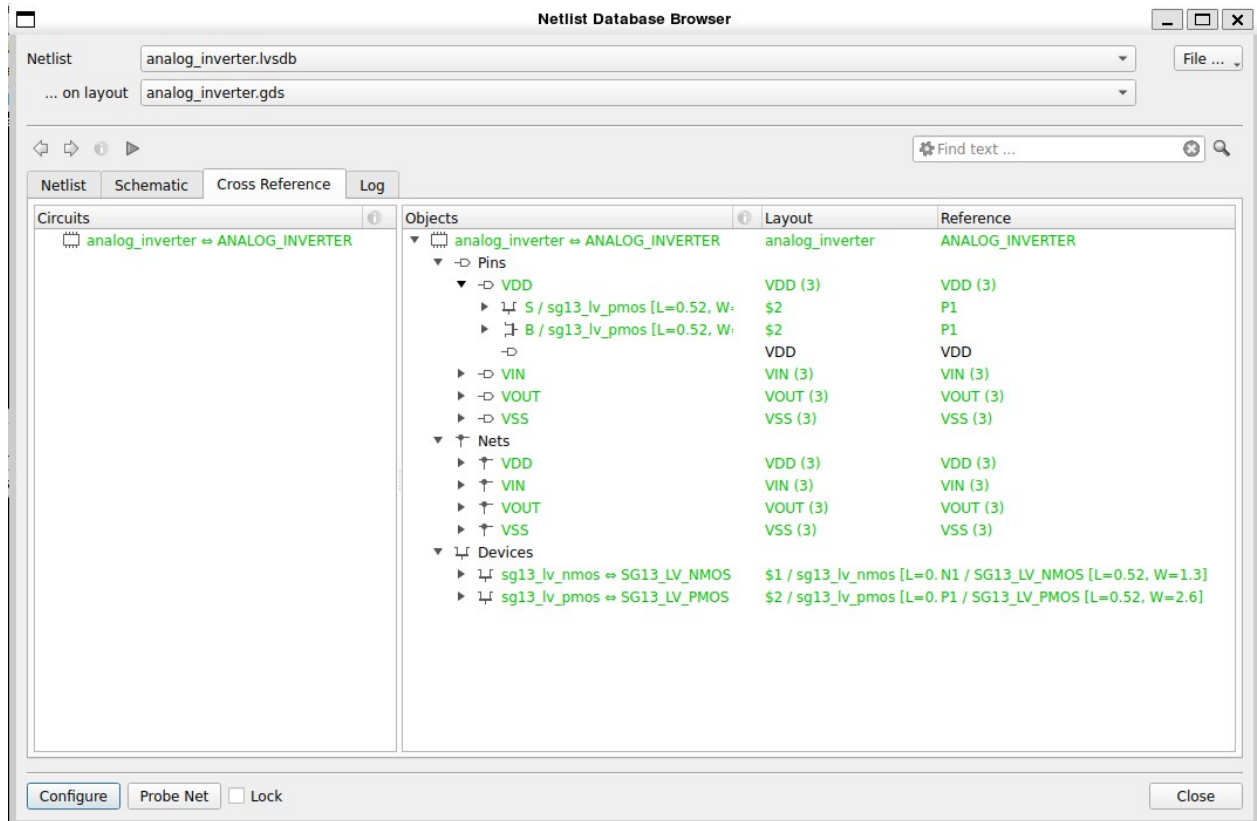


Figure 8.1.: Netlist Browser to view LVSDb files and trace nets

If mismatches occur, the differences are highlighted in red, showing missing devices, incorrect connections, or parameter discrepancies. These issues are further detailed in the Log tab, which provides textual summary of each error and its location in the design. This visualization enables efficient debugging by allowing the designer to inspect each net and device interactively, ensuring complete electrical equivalence before declaring the layout LVS-clean.

Klayout also provides powerful **tracing functionality**, allowing designers to visually select and highlight individual devices or nets within the layout to locate mismatches precisely. As, shown in Figure 8.1, same Netlist Browser could be used to read other layout files such as DRC report. This interactive feedback significantly accelerates debugging and helps ensure that every element is electrically connected as intended.

In summary, LVS is the final and most critical step in confirming that a verified, DRC-clean layout is also **electrically identical** to its schematic representation. By performing LVS through the IHP-provided Python script and analyzing results within KLayout, the design achieves both physical and electrical closure.

The successful completion of this step certifies that the layout accurately implements the intended circuit topology, allowing it to proceed confidently toward **parasitic extraction and post-layout simulation**, and ultimately, **fabrication**.

Chapter 9.

Parasitics and Prevention

Even though a layout is **DRC- and LVS-clean** but can still fail in silicon if parasitics and noise coupling are ignored.

This chapter formalizes the main parasitic mechanisms relevant to **analog ICs**, outlines why analog is **more vulnerable than digital**, and documents the concrete prevention measures implemented in our design. The discussion follows the physical reasoning and best-practice guidance in [6] (Ch. 7), adapted to the SG13G2 context.

9.1. Why Analog Suffers More from Parasitics

Digital logic tolerates substantial RC and substrate coupling because functionality is determined by logic thresholds and noise margins. By contrast, **analog circuits** encode information in **amplitude, phase, and continuous bias conditions**. Small parasitic shifts in device parameters or interconnect coupling directly effects gain, offset, bandwidth, and noise.

Key vulnerabilities arise because analog circuits operate on continuous voltage and current levels, where even small parasitic interactions can shift the operating point or distort the signal.

1. High-impedance nodes, such as the inputs of operational transconductance amplifiers (OTAs), are particularly sensitive because they cannot source or sink significant current. Any parasitic capacitance whether from junction diffusion, metal-to-substrate coupling, or fringe fields from nearby interconnects directly loads these nodes. This loading introduces unwanted poles, reduces input resistance, and increases thermal noise coupling. In precision amplifiers, such parasitic capacitances can also create signal-dependent charge storage, causing distortion or phase lag at higher frequencies.
2. Bias networks and current mirrors are another vulnerable class. These circuits rely on exact matching of device characteristics and stable well or substrate potentials to maintain bias accuracy. Substrate noise or potential fluctuations, often injected from digital switching activity or supply ripple, modulate the body voltage of transistors. This alters their threshold voltage and transconductance (g_m), leading to current imbalance, gain drift, and degraded common-mode rejection. In deep-submicron processes with thin oxides and shallow wells, such coupling becomes even more significant.
3. Feedback paths in analog systems particularly those forming loops for gain control, regulation, or filtering are strongly influenced by parasitic-induced poles and zeros. Capacitances at feedback nodes or unintended inductive loops in routing can introduce additional frequency-dependent elements into the loop transfer function. These parasitics may reduce phase margin, cause peaking in the frequency response, or even lead to oscillations if uncompensated.

Consequently, the layout must be arranged to minimize parasitic capacitance at high-impedance nodes, isolate bias networks from noisy regions, and maintain compact, symmetrical feedback routing to preserve loop stability. Therefore, parasitics must be **anticipated and shaped** not merely checked during layout.

9.2. Interconnect and Device-Level Parasitics

9.2.1. Metal and Coupling Capacitances

Parallel conductors form **inter-wire capacitances**; long, co-planar runs also couple substrate noise through capacitance to ground.

In our layout, we **avoid long same-layer parallel routing** on sensitive nets. Where proximity is unavoidable, we prefer **layer staggering** (e.g., route one net on M_n and the other on M_{n+2}), maintain generous spacing, and, when beneficial, add **symmetric ground shields**. Orthogonal routing between adjacent layers (Manhattan style) further reduces broadside coupling [6].

9.2.2. Via and Contact Parasitics

Vias introduce **series resistance** and small fringing capacitances; unbalanced via stacks can create gain/offset asymmetry. We use **redundant via arrays** on low-impedance and high-current paths, keep **via symmetry** across matched branches, and avoid unnecessary layer hops on high-impedance nodes. This also improves electromigration margins.

9.2.3. Junction/Overlap Capacitances

Source/drain junction areas and perimeters add capacitance that **loads high-impedance nodes** and shifts poles. We mitigate this by **multi-fingering** large devices (controlling diffusion area/perimeter) and by **dummy fingers** to regularize edge effects, as detailed earlier. Device segmentation is paired with **balanced routing and via symmetry** to preserve matching.

9.3. Critical Parasitics Mechanisms and Mitigation Strategies

As discussed above, the physical behavior of the silicon can be compromised by secondary effects. These parasitic mechanisms though invisible in schematic design can severely degrade performance or even render an integrated circuit non-functional.

The following subsections discuss the most relevant effects for analog circuits and the preventive measures applied in this work.

9.3.1. Latch-Up

Latch-up is a destructive parasitic phenomenon that occurs primarily in bulk CMOS and BiCMOS technologies. Within the substrate and well structure, every pair of adjacent p-n junctions inherently forms **parasitic bipolar transistors** (pnp and npn). When certain layout geometries or biasing conditions bring these devices into proximity, they can create an unintended path between the power rails (AVDD and AVSS). A transient event such as an electrostatic discharge, substrate noise spike, or voltage overshoot can trigger this path, producing a **low-impedance short** between supply and ground. Once triggered, the latch-up state sustains itself through regenerative feedback, often leading to local thermal runaway and irreversible damage.

Prevention:

Latch-up prevention requires **breaking the feedback path** and **lowering substrate resistance**. This is achieved by surrounding all active devices with **dense guard rings** and inserting **well and substrate contacts** at regular intervals to provide low-resistance current return paths. Adequate

spacing between n-wells and p-wells reduces parasitic coupling between complementary transistors if area is not an issue. For highly sensitive analog blocks, the **deep-N-well (isolation well)** option provided in the SG13G2 process was employed. This isolation ensures that the substrate region of the pmos core is electrically separated from neighboring structures, effectively suppressing latch-up initiation. Additionally, I/O pads and high-swing nodes are placed away from precision analog circuits to minimize injection of transient substrate currents [6].

9.3.2. Antenna Effect

During etching and deposition steps in fabrication, unconnected metal or polysilicon features can act as **charge-collecting antennas**. If a long interconnect is connected to a transistor gate but not yet to a diffusion region, the charge accumulated on the metal surface can discharge through the thin gate oxide once the diffusion is formed. This discharge can permanently **damage or weaken the gate dielectric**, leading to gate leakage or early breakdown. The risk increases with larger metal area and thinner gate oxides, making advanced nodes and precision analog devices particularly susceptible.

Prevention:

To prevent this, **metal hopping** is applied routing is divided into shorter segments by inserting vias to higher or lower metal layers, thus reducing the effective exposed area. In this work, **metal segmentation** were used for nets identified by the SG13G2 PDK's antenna check script as having potential plasma-induced charging risk.

9.3.3. Interconnecting Vias (Reliability and Noise)

Vias are the vertical interconnects that connect one metal layer to another. Each via has a finite **resistance and current-carrying limit**. If a single via is forced to conduct large currents, it experiences localized heating and **electromigration**, which can lead to open circuits or resistance drift over time. Furthermore, any asymmetry in via count or placement between matched branches creates **mismatch in series resistance**, leading to offset in analog differentials or current mirrors. Vias also contribute small fringing capacitances, and an uneven via distribution can slightly distort signal paths.

Prevention:

To enhance both **reliability and symmetry**, we employ **redundant via arrays** multiple vias placed in parallel to reduce resistance and distribute current density evenly. These are used especially on **low-impedance and high-current paths** such as power rails, bias lines, and OTA output nodes.

In matched differential structures, **via symmetry** is strictly maintained, meaning identical via count, shape, and placement on both branches. This guarantees balanced parasitic resistance and capacitance, preventing differential offset. These measures collectively improve **electromigration margins**, ensuring the long-term reliability of the metal interconnect network.

9.3.4. Charge Injection and Gate Coupling

Charge injection refers to the **unintended transfer of charge** from a switching device's channel or overlap capacitances into adjacent high-impedance nodes. When a MOSFET gate or drain experiences a fast voltage transition, the associated capacitances (C_{gd} , C_{gs} , and junction capacitances) couple a portion of the transient charge into nearby sensitive nodes.

In analog amplifiers or sampling circuits, this causes **voltage transients, bias perturbations,**

or signal distortion. The effect is more pronounced in narrow-geometry devices and high-speed circuits, where transitions occur rapidly and charge redistribution is incomplete.

Prevention:

The most effective mitigation is **careful routing and shielding**. High-impedance nodes are kept as short as possible, routed away from noisy or switching signals, and, where feasible, enclosed by **ground shields** connected to quiet references (AVSS). In differential circuits, balanced and symmetric routing ensures that any residual injected charge appears as a **common-mode disturbance**, which is then rejected by the amplifier's differential nature.

In networks involving switching (e.g., current-steering DACs or sample-and-hold circuits), **bottom-plate switching** and **complementary transistor pairs** are used to cancel charge injection. In static bias networks, minimizing gate-drain overlap and ensuring sufficient separation from high-slew-rate lines further reduces this parasitic coupling.

In summary, understanding these parasitic mechanisms is essential for robust analog design. Each represents a different physical coupling path through the substrate, interconnect, or process environment and each must be addressed at layout level.

The preventive strategies applied in this work, derived from the IHP SG13G2 PDK rules and the guidelines in [6] and [8], ensure that the layout not only meets design rules but also preserves **electrical integrity and long-term reliability** in fabrication and operation.

9.4. Guard Rings (Local Substrate Sinks) - Saviour

Guard rings are a fundamental structural element for **substrate noise suppression** and **latch-up prevention** in analog and mixed-signal IC layouts. They consist of **diffusion regions tied to power rails** that form a **low-impedance sink** for substrate currents and injected minority carriers. When nearby transistors switch, charge is injected into the substrate or well regions, creating potential fluctuations that can couple into sensitive nodes. Guard rings intercept these currents and route them to a stable potential (AVDD or AVSS), thereby **reducing parasitic coupling, improving device reliability, and stabilizing substrate potentials** [6].

In physical terms, the substrate and well behave as resistive media represented by **R_{sub}** (substrate resistance) and **R_{well}** (well resistance). Both parameters define the degree of electrical isolation between neighboring devices.

A high R_{sub} or R_{well} increases the voltage drop caused by substrate or well currents, thereby amplifying potential modulation and noise coupling. Guard rings **effectively lower these resistances** by providing parallel, low-resistance paths to the respective power rails. This ensures that any injected charge is quickly dissipated, keeping local substrate potentials nearly constant. Reducing R_{sub} and R_{well} is therefore essential not only for **latch-up prevention**, but also for **matching accuracy** in precision analog circuits, where small potential gradients can alter threshold voltages and current ratios.

In this work, **every sensitive device group** including the differential input pair, active loads, and current mirrors is enclosed by **fully closed rectangular guard rings**.

For NMOS devices placed in the p-substrate region, **p guard rings** are tied to **AVSS (analog ground)**, while for PMOS devices inside n-wells, **n guard rings** are connected to **AVDD**. This configuration ensures that both substrate and well domains have **firm voltage references**, minimizing variations in local body potential and suppressing latch-up triggering paths. Contacts are inserted at **regular pitch** along the ring, effectively reducing the sheet resistance of the ring and enhancing current collection efficiency.

From a design standpoint, several parameters determine guard-ring effectiveness:

- **Ring width** : Wider guard rings exhibit lower resistance and better current collection but consume

additional layout area.

- **Contact density** : A higher number of substrate or well contacts per unit length lowers R_{sub} and R_{well} , improving isolation.
- **Continuity** : Continuous guard rings provide stronger confinement of the local substrate potential, while segmented ones trade isolation for area and routing flexibility.

Two topological categories are widely used:

- **Continuous Guard Rings**

These structures **completely enclose** the protected device region without any breaks. They offer **maximum isolation**, **lowest effective substrate resistance**, and **best protection against latch-up and substrate noise**.

Continuous rings are preferred in **high-precision analog blocks** where low R_{sub} and R_{well} are crucial for stable operation. In our OTA layout, every critical block especially the differential pair is enclosed by **continuous rectangular guard rings**, chosen for their strong isolation and reliability.

- **Segmented Guard Rings**

These are composed of **discrete diffusion segments** separated by intentional openings to accommodate routing or area constraints. While they exhibit **higher R_{sub}** and **reduced isolation** compared to continuous rings, properly designed segmented rings can still prevent latch-up and effectively attenuate substrate coupling. They are often used in moderately sensitive or space-limited blocks.

In conclusion, the guard-ring network in this layout not only suppresses substrate coupling and latch-up but also **reduces R_{sub} and R_{well}** , anchoring the local substrate and well potentials to fixed references. This ensures stable device behavior across temperature and process variations and significantly enhances long-term reliability of the analog core.

9.5. Block-Level Practices Implemented in This Work

- **Per-group isolation.** The **differential pair**, **active load**, and **current-mirror groups** are each enclosed by **complete guard rings** and placed inside **deep N-well/isolation** where available, creating local “quiet islands.”
- **Layer strategy.** Sensitive differentials avoid **same-layer, long parallel runs**. When proximity is required, we route on M_n **vs.** M_{n+2} with adequate spacing; orthogonal adjacency between M_n and M_{n+1} is preferred for crossings.
- **Decoupling.** **Local decoupling mosfets** (e.g., from AVDD to AVSS) are placed **close to the OTA core**, especially around the **input pair**, with short, wide connections and redundant vias inside the same isolation domain.
- **Symmetry.** Wherever matching matters, we keep **equal lengths**, **matched via stacks**, and **balanced shields** on both branches so parasitics affect each side equally.

9.6. Practical Checklist (Analog-Focused)

1. **Plan isolation first.** Assign deep-N-well/guard-ring envelopes before routing.

2. **Route high-Z nodes last.** Keep them shortest; add shields only if you can mirror them.
3. **Avoid parallelism.** No long, same-layer parallels on sensitive nets; prefer M_n vs. M_{n+2} .
4. **Use via arrays.** Add redundancy and enforce symmetry across matched paths.
5. **Place decaps locally.** Near the most sensitive block (here, the differential pair).
6. **Re-run checks often.** DRC + antenna + density after small edits; extract and inspect parasitics on critical nodes early.

 Pro Tip - Parasitics Are Design Variables

Treat coupling capacitances, substrate returns, and via resistances as **designable quantities**. Early floorplanning of isolation, ring continuity, layer assignment, and decap placement saves orders of magnitude in late-stage debugging and protects analog performance margins [6].

Chapter 10.

Final Layout Steps - Bonding, Seal Ring, and Pad-Frame Integration

After completing device-level layout, parasitic-aware routing, and full DRC/LVS verification, the final stage of physical design is the construction of the **pad frame** and the **seal ring**. These structures are the physical interface between the silicon die and the outside world. Although electrically simple, they are mechanically and parasitically critical, as they determine whether the fabricated chip can be safely diced, bonded, packaged, and measured.

In the SG13G2 process, the IHP-PDK provides a fully parameterized library of PCells for bond pads, ESD structures, and seal rings, which we used and adapted for our layout.

10.1. The Seal Ring: Mechanical and Electrical Protection

The **seal ring** is a continuous frame of thick metal that surrounds the entire active layout region. Its primary function is **mechanical protection** during wafer dicing: when the wafer is cut, cracks can propagate inward from the die edge. The seal ring absorbs these stresses and prevents them from reaching active devices.

Beyond its mechanical role, the seal ring also acts as a **low-impedance electrical shield**[6], tied to AVSS, providing:

- protection against environmental contamination and moisture diffusion,
- suppression of substrate noise entering from the die periphery,
- confinement of parasitic surface currents.[6]

In the SG13G2 PDK, the seal ring is provided as a **P__Cell** (parameterized cell), built from stacked metal layers and dense via walls. Its geometry is fully adjustable width, margin, and spacing can be tuned allowing the designer to adapt it to the die dimensions while maintaining foundry compliance. For this work, we instantiated and customized the provided seal ring PCell and placed it around the complete pad frame, ensuring full mechanical and electrical enclosure of the analog OTA core.

10.2. Bond Pads and External Interfacing

Bond pads form the electrical interface between the on-chip metal layers and the external package or measurement environment. Each pad is a large, top-metal landing area with a passivation opening, designed to withstand mechanical bonding forces while maintaining low series resistance.

To minimize parasitic disturbance, each functional bond pad was further **surrounded by a dummy pad frame**; a ring of electrically inactive pads. These dummy pads act as protective buffers: if parasitic displacement currents or surface leakage occur near the die edge, they discharge into the dummy pads rather than coupling into the functional I/O pads. This arrangement reduces the susceptibility of the pad ring to noise and preserves the integrity of the sensitive analog connections.[8]

The placement of pads was also optimized to minimize parasitic capacitive coupling to the underlying analog core. Pads were spaced to avoid long parallel overlaps with internal routing, and their distribution was balanced to avoid asymmetries in substrate stress and top-metal loading.[6]

10.3. Bonding Techniques: Wire Bonding vs. Flip-Chip

Two principal bonding methods exist in industry, each with distinct process and performance characteristics.

10.3.1. Wire Bonding

Wire bonding uses thin gold or aluminum wires, thermosonically welded between the pad and the package lead.

It is widely used for low- to medium-pin-count analog ICs because:

- it requires minimal packaging infrastructure,
- pads can be placed on the periphery,
- the process is accessible and cost-effective,
- bare dies can be bonded directly without redistribution layers.

For this project intended for bare-die evaluation **wire bonding** was the natural choice and fully supported by the SG13G2 pad library.

10.3.2. Flip-Chip Bonding

Flip-chip uses solder microbumps on the die surface, flipping the die face-down onto the substrate. It offers extremely low-inductance interconnects but demands:

- redistribution layers,
- specialized bump-formation equipment,
- underfill materials,
- and advanced assembly infrastructure.

These requirements go beyond the scope of this prototype analog OTA; therefore, flip-chip pads were not used.

10.4. Pad Geometry: Orthogonal vs. Square Pads

Bond pad geometry influences both mechanical reliability and parasitic loading. [6] mentions classical square pads are straightforward but can concentrate mechanical stress at their sharp corners during bonding. To mitigate this, the SG13G2 PDK also offers **orthogonal (octagonal) pads**, which soften corner transitions and distribute force more evenly across the pad boundary. They inherently reduce the tendency for:

- metal delamination,
- passivation cracking,

- and edge-induced parasitic capacitive coupling.

In this design, **orthogonal octagonal pads** were selected for all I/O connections, ensuring robust bonding and improved parasitic behavior relative to simple square geometries.

10.5. ESD Protection

Electrostatic discharge (ESD) can destroy sensitive analog devices long before a chip is ever powered in the lab.

To prevent this, the SG13G2 PDK provides a series of **ESD protection PCells**, including:

- diode clamps,
- grounded-gate NMOS structures

PCells are invaluable because they embed **foundry-validated device geometries**, with correct well biasing, spacing rules, finger structures, and metal enclosures. Designing ESD structures manually would risk violating subtle DRC rules particularly those related to well spacing, diffusion density, and metal overlap.

By using the PDK-provided PCells, the pad frame automatically complies with:

- ESD breakdown voltage limits,
- safe discharge paths during bonding and handling,
- and all SG13G2-specific reliability constraints.

Although not all ESD structures were required for our simple OTA test chip, their availability ensured that the pad frame could be expanded into a full mixed-signal environment if needed.

10.6. Density Fill Structures (Metal, Active, and Poly Fillers)

The final step before tape-out is the insertion of **density fill structures**, often simply referred to as *fillers*. Modern fabrication processes require that each metal, diffusion, and polysilicon layer maintain a specified **pattern density** within every local window of the layout. These density rules prevent issues such as erosion, and non-uniform planarization during CMP (Chemical–Mechanical Polishing), which can adversely affect metal thickness, resistance, and interlayer dielectric integrity.

Fillers are non-functional geometries typically small, repeatable patterns of **metal**, **active diffusion**, and **gate poly** that ensure the overall layout meets the foundry’s density requirements without altering circuit behavior.

They are deliberately placed far from sensitive analog nodes or designed with grounded landing points so that any residual capacitive effect remains negligible. In analog circuits, filler insertion must be performed carefully to avoid parasitic loading of high-impedance nodes or unintentional coupling to bias networks.

The IHP-SG13G2 PDK provides automated filler-generation utilities that greatly simplify this process.

Filling can be performed directly within **KLayout** using built-in irreversible function, or, more robustly, through a **Python script supplied by the PDK**, which analyzes layer densities and inserts the appropriate fill shapes according to process-specific rules.

The script outputs a final **GDS2 file** in which all required fills metal, active, and poly have been inserted and you have to verify against the SG13G2 density constraints.

This finalized and verified, density-compliant GDS2 file represents the **manufacturing-ready layout**, suitable for submission to the foundry in compliance with all CMP and density specifications.

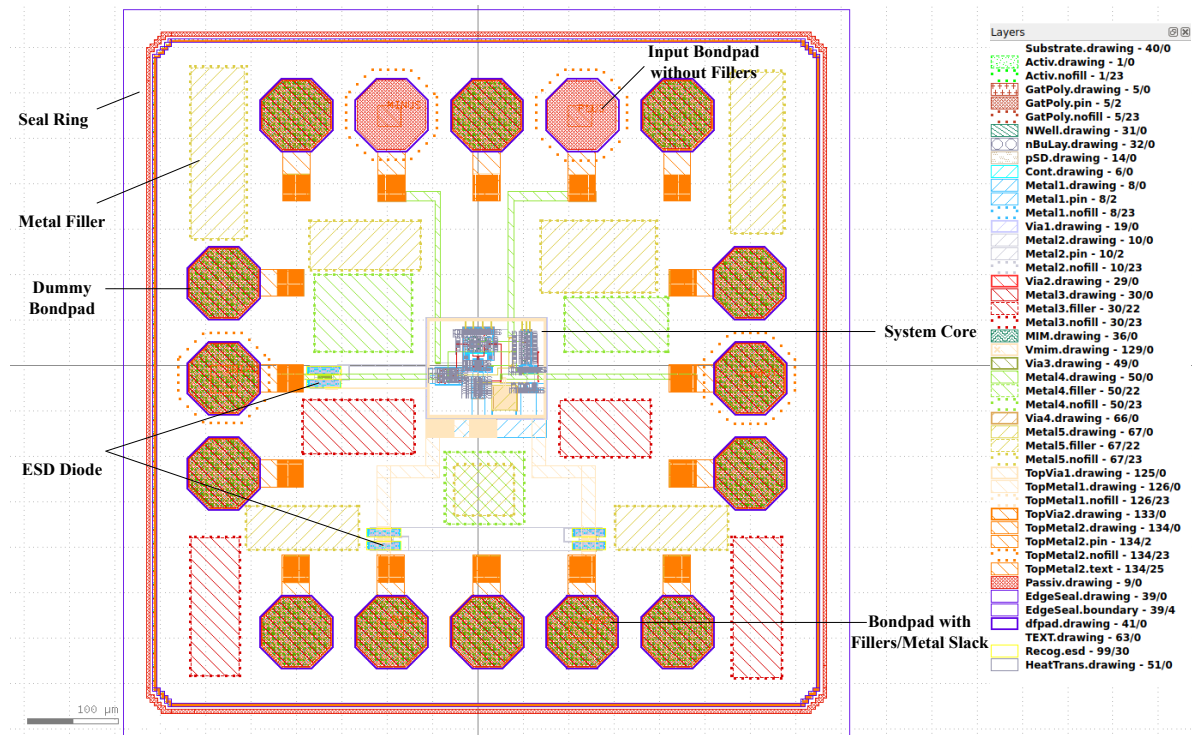


Figure 10.1.: Final NMOS-OTA Chip Layout with Bondpads, ESD Diodes and Metal Fillers around the core block before final density fillers.

Part III.

Post-Layout Simulation

Chapter 11.

Post layout simulation.

We have established testbenches for DC, AC, and transient analysis using the symbol of the designed inverter as a subcircuit. The next step is to perform post-layout simulation by replacing the schematic netlist with the extracted layout netlist (PEX), in order to verify whether the performance remains consistent after layout parasitics are included.

Firstly we need to open the symbol file in Xschem, edit the properties of the symbol See Figure 11.1. Change from `subcircuit` to `primitive`.

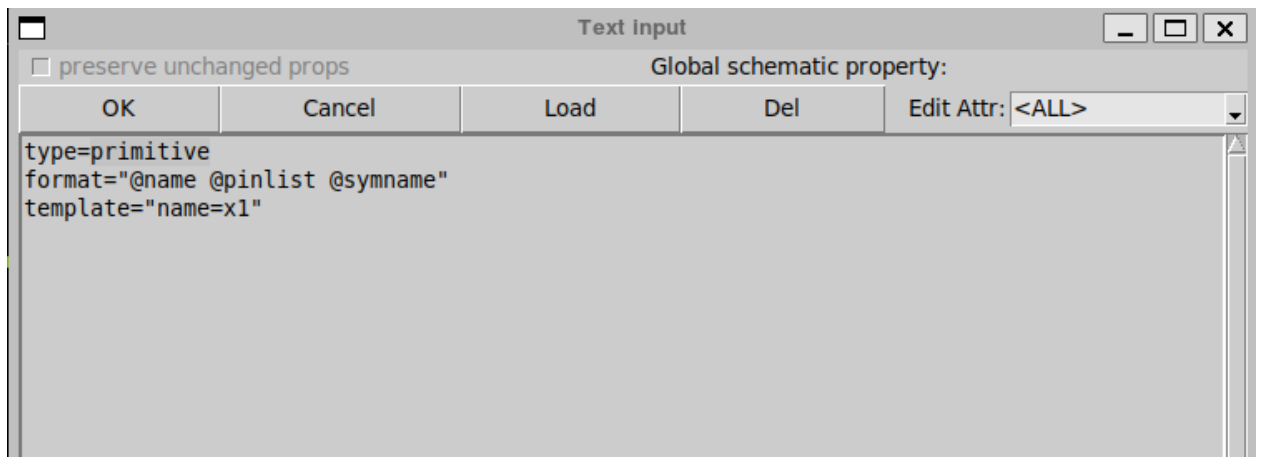


Figure 11.1.: Primitive

Once changed to primitive, now we can include the `.spice` file or `.cir` file from layout to the testbench. See Figure 11.2


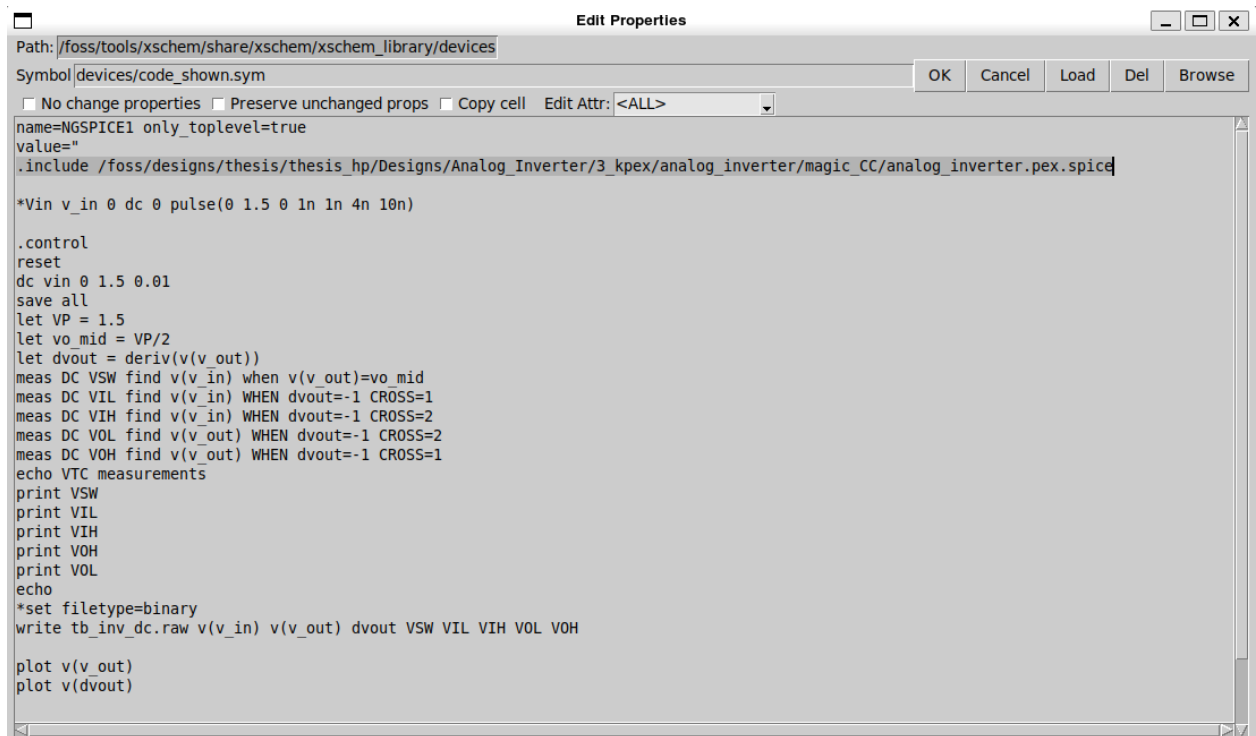


Figure 11.2.: Include

Once the file is declared, we can run the testbench.

! Correct pin order

It is critically important to match the order of pins and their names. The pin order and names in the `.cir` files need to be exact same as included in the testbench. See the figures mentioned below

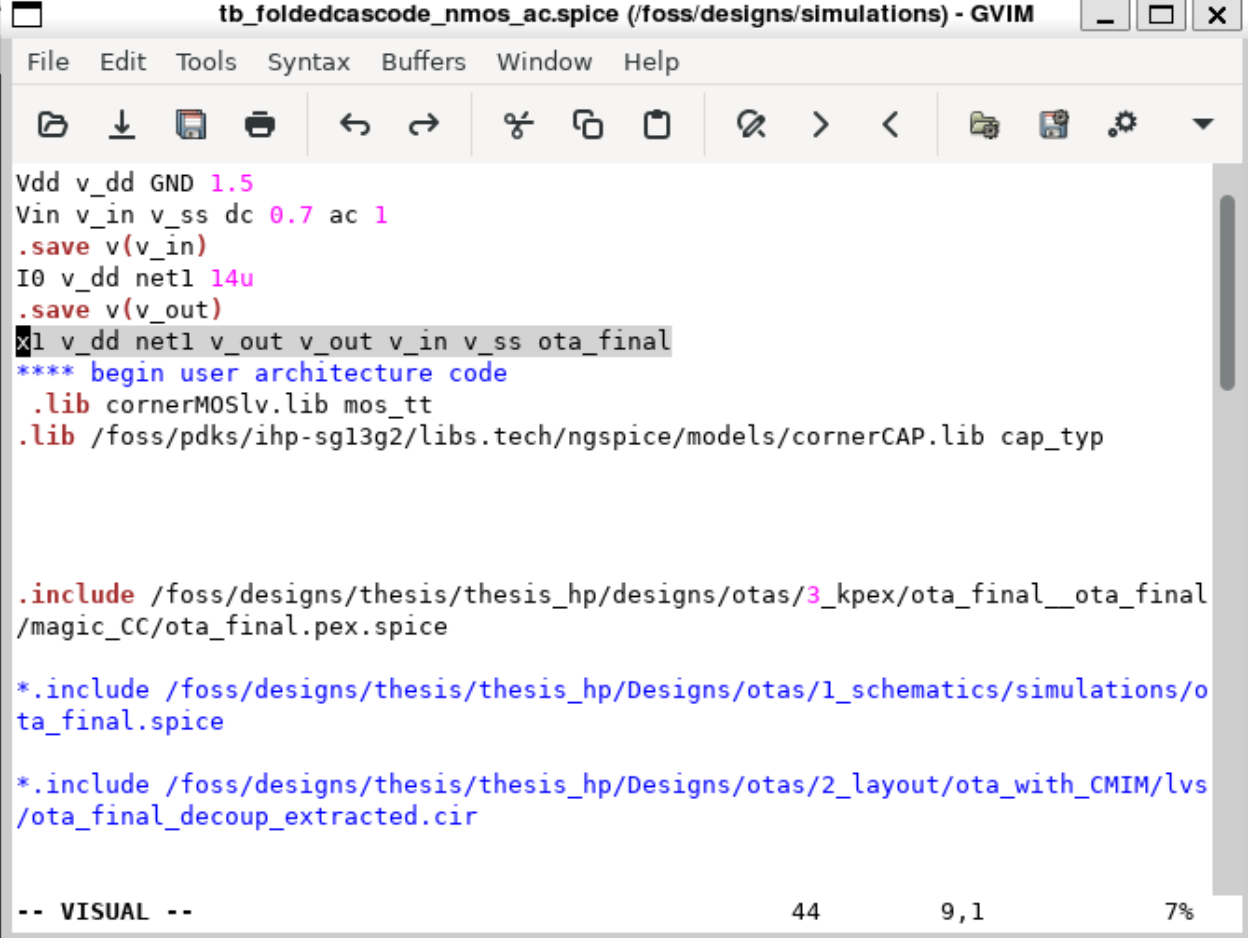

```

Vdd v_dd GND 1.5
Vin v_in v_ss dc 0.7 ac 1
.save v(v_in)
I0 v_dd net1 14u
.save v(v_out)
x1 v_dd net1 v_out v_out v_in v_ss ota_final
**** begin user architecture code
.lib cornerMOSlv.lib mos_tt
.lib /foss/pdks/ihp-sg13g2/libs.tech/ngspice/models/cornerCAP.lib cap_typ

.include /foss/designs/thesis/thesis_hp/designs/otas/3_kpex/ota_final__ota_final
/magic_CC/ota_final.pex.spice

*.include /foss/designs/thesis/thesis_hp/Designs/otas/1_schematics/simulations/o
ta_final.spice

*.include /foss/designs/thesis/thesis_hp/Designs/otas/2_layout/ota_with_CMIM/lvs
/ota_final_decoup_extracted.cir

-- VISUAL --
44          9,1          7%

```

* Extracted by KLayout with SG13G2 LVS runset on : 14/07/2025 15:15

.SUBCKT ota_final AVDD IBIAS VOUT MINUS PLUS AVSS	
M\$1	AVSS AVSS \ \$75 AVSS sg13_lv_nmos L=1u W=6u AS=1.59p AD=1.59p PS=10.06u + PD=10.06u
M\$2	\ \$75 MINUS \ \$62 AVSS sg13_lv_nmos L=1u W=6u AS=1.14p AD=1.14p PS=6.76u + PD=6.76u
M\$3	\ \$62 PLUS \ \$71 AVSS sg13_lv_nmos L=1u W=6u AS=1.14p AD=1.14p PS=6.76u + PD=6.76u
M\$4	\ \$71 AVSS AVSS AVSS sg13_lv_nmos L=1u W=6u AS=1.59p AD=1.59p PS=10.06u + PD=10.06u
M\$5	IBIAS \ \$55 \ \$56 AVSS sg13_lv_nmos L=0.13u W=1u AS=0.34p AD=0.34p PS=2.68u + PD=2.68u
M\$6	AVSS \ \$56 IBIAS AVSS sg13_lv_nmos L=5u W=8.5u AS=1.93375p AD=1.93375p + PS=12.445u PD=12.445u
M\$10	AVDD VOUT \ \$22 AVSS sg13_lv_nmos L=0.5u W=15u AS=3.4125p AD=3.4125p + PS=20.57u PD=20.57u
M\$14	AVSS \ \$56 \ \$63 AVSS sg13_lv_nmos L=5u W=8.5u AS=1.93375p AD=1.93375p + PS=12.445u PD=12.445u
M\$18	AVSS \ \$3 \ \$2 AVSS sg13_lv_nmos L=0.13u W=1u AS=0.34p AD=0.34p PS=2.68u + PD=2.68u
M\$23	AVSS \ \$56 \ \$62 AVSS sg13_lv_nmos L=5u W=8.5u AS=1.93375p AD=1.93375p + PS=12.445u PD=12.445u
M\$27	\ \$63 \ \$73 \ \$65 AVDD sg13_lv_pmos L=2u W=14u AS=3.185p AD=3.185p PS=19.32u + PD=19.32u
M\$31	AVSS \ \$73 \ \$66 AVDD sg13_lv_pmos L=0.5u W=14u AS=3.185p AD=3.185p

Post layout and prelayout graphs to be added here as results

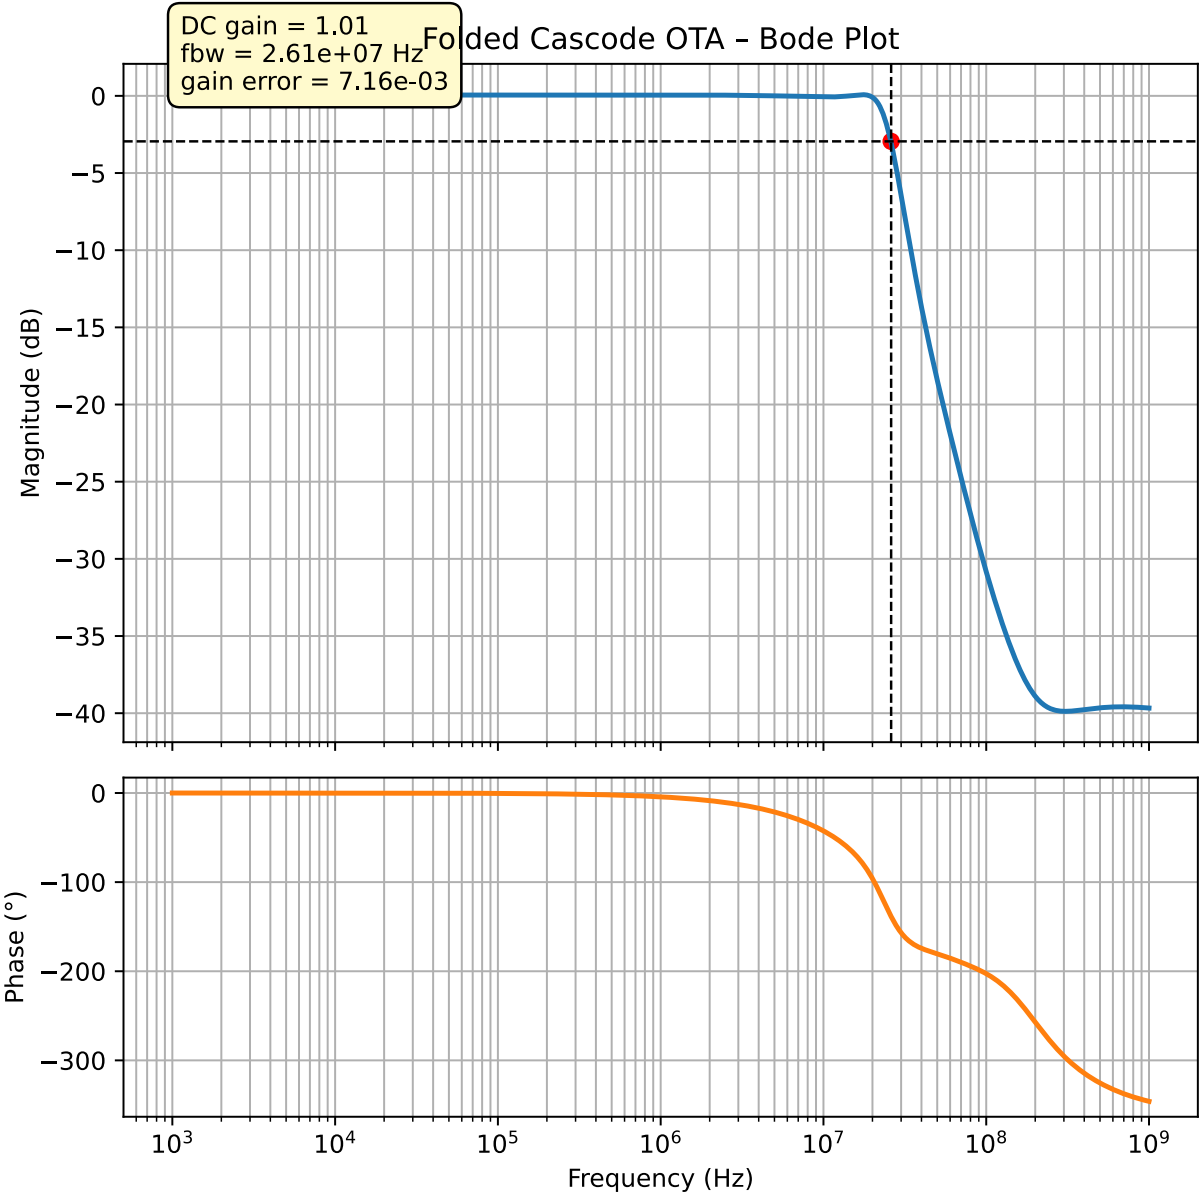


Figure 11.3.: Postlayout Results

Chapter 12.

PEX

Parasitic Extraction (PEX) is a critical step in analog IC design that occurs **after layout** and **before final verification/tapeout**. It models the unintended resistive and capacitive effects introduced by routing, device placement, and proximity in silicon.

In analog circuits — especially precision blocks like **folded cascode OTAs** — these parasitics significantly affect performance, making PEX-based simulations essential.

12.1. Why Do We Need PEX?

Reason	Description
Performance Degradation	Parasitic capacitance reduces bandwidth and phase margin.
Offset and Mismatch Effects	Parasitic coupling causes imbalance in differential paths.
Stability Impact	Additional phase lag from parasitics can destabilize feedback loops.
Post-Layout Verification	Confirms that layout did not violate design intent (gain, UGB, PSRR, etc.).
Tapeout Confidence	Ensures high correlation between simulation and silicon behavior.

For a folded cascode OTA, RC + CC extraction is essential. It ensures layout-induced degradation is captured early in simulation, enabling confident tapeout. Neglecting coupling capacitance or interconnect resistance can lead to significant performance loss or instability in silicon.

12.2. PEX using Klayout-PEX tool

IIC-OSIC-Tools comes with pre-installed tool called as **K-pex**. The current status of [KLayout-PEX](#) says as following:

Available KLayout PEX Engines[9]:

Engine	PEX Type	Status	Description
KPEX/MAGIC	CC, RC	Usable	Wrapper engine, using installed magic tool
KPEX/Faster-Cap	Cp	Usable, pending QA	Field solver engine using FasterCap
KPEX/FastHenry2	R, L	Planned	Field solver engine using FastHenry2
KPEX/2.5D	CC	Under construction	Prototype engine implementing MAGIC formulas in KLayout
KPEX/2.5D	R	Under construction	Prototype engine implementing MAGIC formulas in KLayout

12.3. Running the KPEX/MAGIC Engine[9]

The magic section of `kpex --help` describes the arguments and their defaults. Important arguments:

- `--magicrc`: specify location of the `magicrc` file
- `--gds`: path to the GDS input layout
- `--magic`: enable magic engine

12.3.1. Example Command

```
kpex --pdk ihp_sg13g2 --magic --gds GDS_PATH --out_dir OUTPUT_DIR_PATH
```

more to `kpex` can be found under the command `kpex --help`

`kpex --help` command gives us the complete list of useful commands in order to understand the usage of KPEX

Once PEX is successfully done, the extracted netlist SPICE file will be generated in the provided output path, which consists of extracted parasitics which can be further used to do post layout simulations and verify whether the design layout satisfies the design specifications or not.

12.4. Observations and Practical Results

During this work, the 2025.05 Docker release of IIC-OSIC-Tools was used, since the design was submitted on 21 August 2025, and subsequent debugging was performed in that version. When running the FasterCap engine, the process executed successfully; however, the generated `.pex.spice` file was empty, indicating that no valid parasitic data were written. Conversely, when using the MAGIC engine, a `.pex.spice` file was generated but contained improperly scaled parameters, leading to simulation inconsistencies.

Upon investigation of the official IIC-OSIC-Tools release notes, it was confirmed that in the 2025.07 update, the developers temporarily removed `klayout-pex` due to incompatibility with several dependencies.

This subsequent removal confirms that the encountered issues in the 2025.05 environment were indeed genuine tool-level compatibility problems, not user-level errors. Therefore, for this design, PEX-based post-layout simulations were omitted, and circuit validation was based on pre-layout verification complemented by manual parasitic estimation from layout dimensions.

Chapter 13.

Conclusion

This thesis has demonstrated that a fully open-source design flow, combined with the IHP SG13G2 130-nm SiGe BiCMOS open PDK, is capable of producing manufacturable analog ICs. Through the complete design and physical implementation of a folded-cascode OTA for LED-driver control and the successful acceptance of **two tape-outs** in the IHP Open-MPW run of July 2025 we have shown that open-source tools can support real mixed-signal fabrication when guided by rigorous analog layout methodology and parasitic-conscious design practices. Importantly, by deliberately **interchanging roles** one author acting as circuit designer while the other served as layout engineer for NMOS-OTA, and vice versa in the second tape-out for PMOS-OTA we gained a comprehensive understanding of the full analog design flow, toolchain interactions, and workflow dependencies essential for mixed-signal development. The submitted tape-outs and supporting files can be found in *Appendix - A*. The calculated area of an individual chip is 6.4×10^{-7} **sq. mm** with dimensions $800 \mu\text{m} \times 800 \mu\text{m}$

The work also highlighted the strengths and current limitations of the open ecosystem. While schematic and layout stages were executed reliably using Xschem, Ngspice, CACE, and KLayout, parasitic extraction remains the least mature part of the toolchain. KLayout-PEX offers preliminary extraction capability, but a comprehensive, geometry-accurate RC extraction and post-layout verification flow is still missing. Strengthening open-source PEX tools should therefore be a focus of future research, as accurate parasitic modeling is essential for predicting analog behavior with high confidence.

Looking ahead, the fabricated chips once received, will enable full electrical characterization. The chip will be in the form of *bare die* therefore, needs bonding. After bonding, a dedicated **PCB test platform** should be designed to evaluate the OTA's gain, bandwidth, bias robustness, and real-silicon parasitic effects. Such measurements will not only validate the design but also provide deeper insight into the accuracy and limitations of the open-source toolchain itself.

In summary, this work demonstrates that open-source analog IC design is not only feasible but tape-out proven, while also identifying parasitic extraction, toolchain refinement, and post-silicon testing as the key opportunities for advancing future open-silicon research.

Bibliography

- [1] B. Wicht, “Analog building blocks of dc-dc converters: Examining fundamental concepts,” *IEEE Solid-State Circuits Magazine*, vol. 12, no. 3, pp. 42–47, 2020, doi: [10.1109/mssc.2020.3002141](https://doi.org/10.1109/mssc.2020.3002141).
- [2] P. G. A. Jespers and B. Murmann, *Systematic design of analog CMOS circuits: Using pre-computed lookup tables*. Cambridge University Press, 2017.
- [3] H. Pretl, M. Koefinger, and S. Dorrer, “Analog Circuit Design.” Dec. 2024. doi: [10.5281/zenodo.14387481](https://doi.org/10.5281/zenodo.14387481).
- [4] I. PDK, “SG13G2 IHP open source layout rules,” Leibniz Institute for High Performance Microelectronics, Design Reference, Dec. 2024.
- [5] R. J. Baker, *CMOS: Circuit design, layout, and simulation*, 3rd ed. Wiley-IEEE Press, 2010, p. 1208. doi: [10.1002/9780470891179](https://doi.org/10.1002/9780470891179).
- [6] J. Lienig and J. Scheible, *Fundamentals of layout design for electronic circuits*. Springer International Publishing, 2020. doi: [10.1007/978-3-030-39284-0](https://doi.org/10.1007/978-3-030-39284-0).
- [7] B. Razavi, *Design of analog CMOS integrated circuits*. McGraw-Hill, 2001.
- [8] B. Razavi, *Design of analog CMOS integrated circuits*. McGraw-Hill, 2011.
- [9] M. Köhler, “KLayout-PEX.” Nov. 2025. Available: <https://iic-jku.github.io/klayout-pex-website/doc/doc.html>

Appendix A.

Tapeout Submissions and Repository Links

A.1. Tapeout 1

This design, titled “**ledamp_ph70**”, was submitted to the *IHP Open-MPW TO_July2025* program and is available at:

https://github.com/IHP-GmbH/TO_July2025/tree/main/ledamp_ph70

All associated files including the final GDSII layout, DRC reports, LVS logs, simulation data, and documentation are provided in the corresponding repository.

Tapeout 1 implements an **NMOS folded-cascode OTA**, serving as the first realization of the analog block within the open-source flow.

A.2. Tapeout 2

The second submission, titled “**OTALED**”, is hosted at:

https://github.com/IHP-GmbH/TO_July2025/tree/main/OTALED

This repository contains the complete set of fabrication-ready deliverables, analogous to Tapeout_1: layout, verification reports, extracted netlists, and supporting documentation.

In contrast to Tapeout 1, Tapeout 2 implements a **PMOS folded-cascode OTA**, enabling a comparative evaluation of device polarity, layout strategies, and biasing considerations within the same SG13G2 process.

Together, these two tapeouts document the full analog design cycle executed twice with interchanged roles, providing a complete methodological reference for future open-source mixed-signal tapeout efforts.

Appendix B.

Final Chip Layout

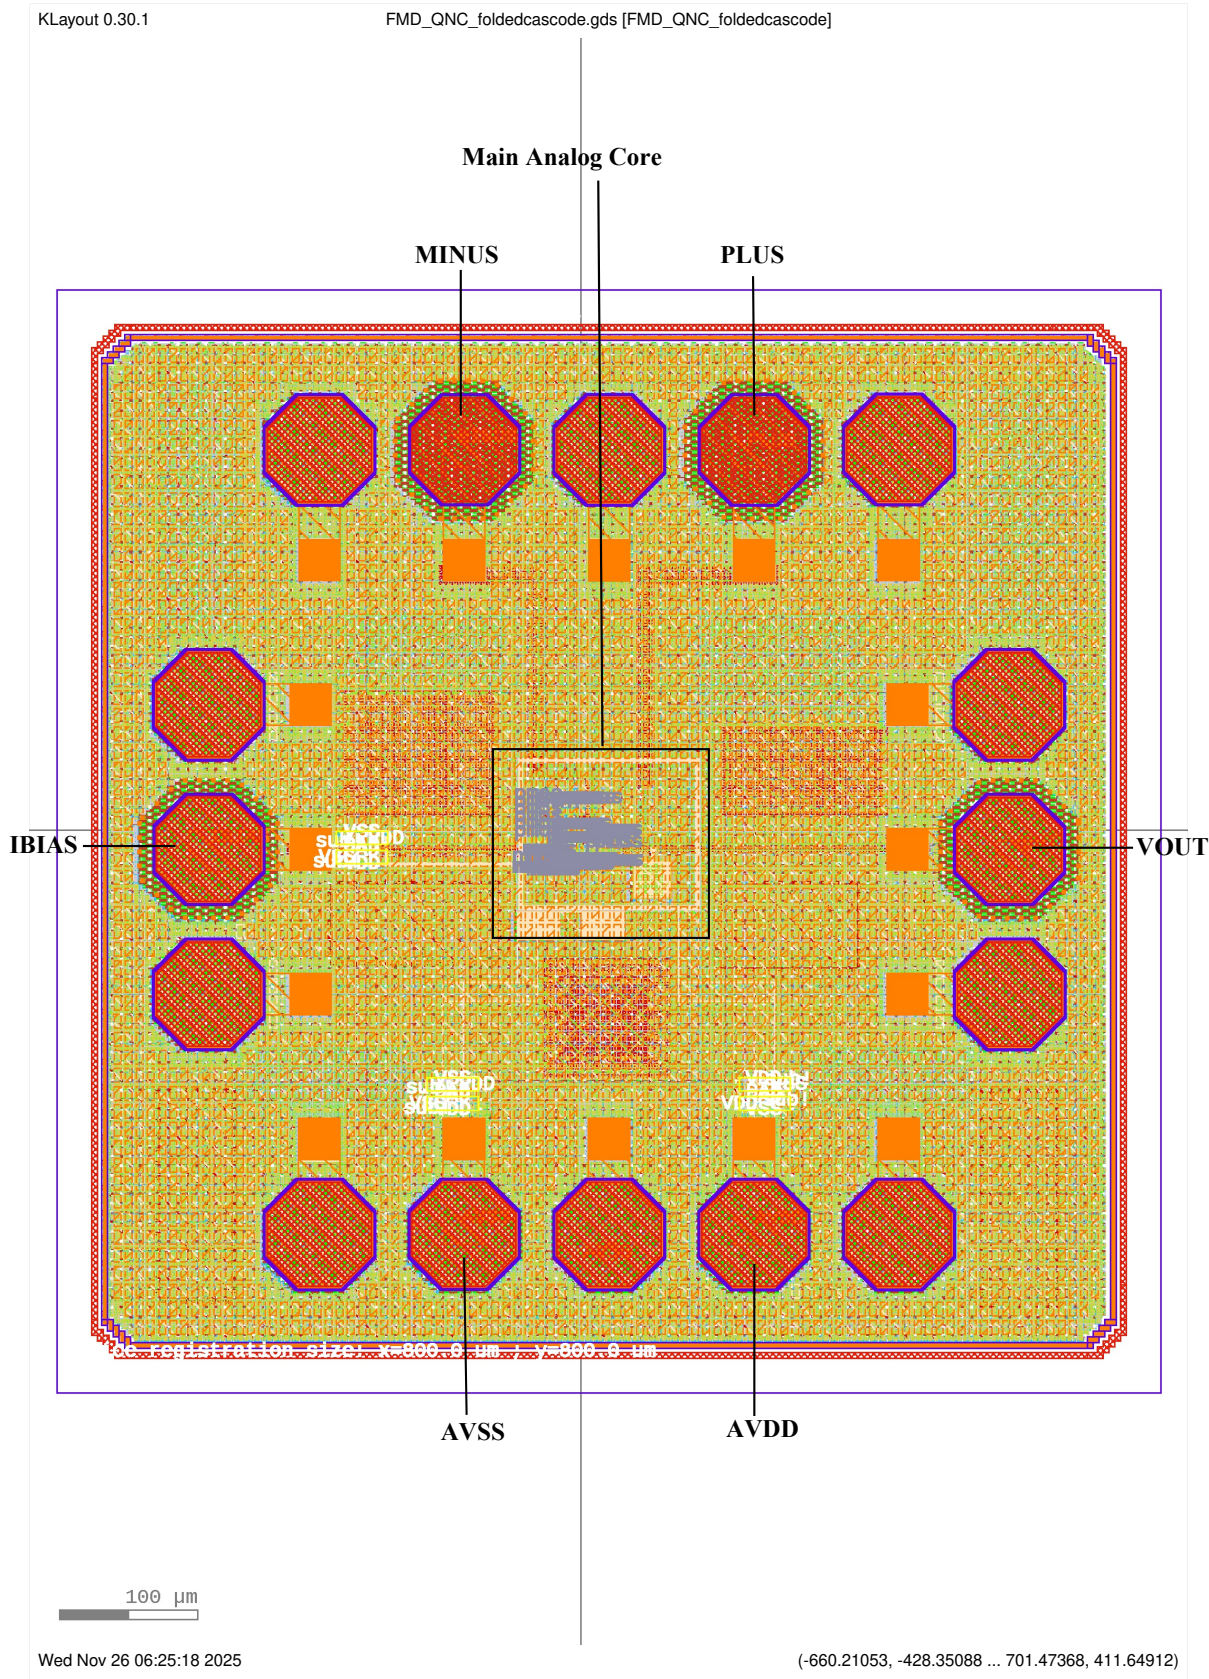


Figure B.1.: Final PMOS OTA after adding fillers

Appendix C.

USB-Stick and Script Referencing

All directory structures and file paths presented in this appendix are intentionally simplified. They are provided to clarify the organization of the project and to indicate where specific scripts, netlists, verification outputs, and layout files can be found within the design environment.

```
thesis_hp/
  .gitattributes
  .gitignore
  _book/
  _quarto/
  _quarto.yml
  _bibliography
  _manuscript
  index.qmd          # Main project page / Abstract
  README.md
  references.qmd
  KNOWN_ISSUES.md
  cace/              # CACE setup for corner alaysis, PVT, MonteCarlo.
  content/           # contains all the .qmd files for documentation
  Designs/           # Top-level Design Folder
    1_schematics/    # (Design subfolder: Circuit schematics)
      otas/          # contains .sch files of otas
    2_layout/        # (Design subfolder: Physical layout files)
      tapeout/
        final_layout_before_fillering/ # final gds files
    3_kpex/          # (Design subfolder: Extracted parasitic netlists)
  Expose_HP/
  figures/           # contains all the figures for documentation
  layout_scripts/    # DRC Error Check and Minimum Finger Estimation scripts
  Literature/         # References or literature review material
  python_codes/       # Python scripts to plot raw data
  sizing/
    matlab/          # contains matlab codes for lookup tables
    python/           # sizing using pygmid tool and python scripts for sizing
    xschem/           # contains testbenches on mosfets to Extract data
                      # provided by foundry to use them for gm id method
  simulations/        # Folder for .spice files and .raw outputs
  postlayout_simulations/ # Post-Layout Simulation results/setup
```