




BHAC40R-40

40 Watt

182mm 40Cells All Black Solar
Tile Mono PV Module Series

Almaden Linear Warranty

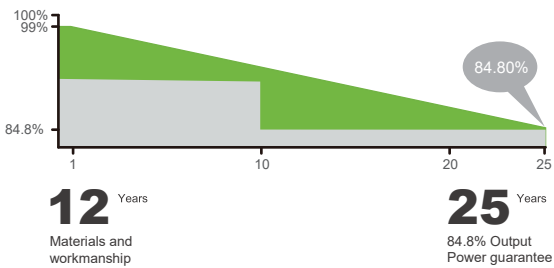

Half Cut Cell



Resists 35mm hail
Withstands 12-grade winds



25-year waterproof and
Rooftop safety guarantee



Lower summer indoor
Temperatures by 5-8°C




Reduce energy consumption
By 10%



Modular design with standardized
prefabricated construction



ALMADEN[®] - BIPV

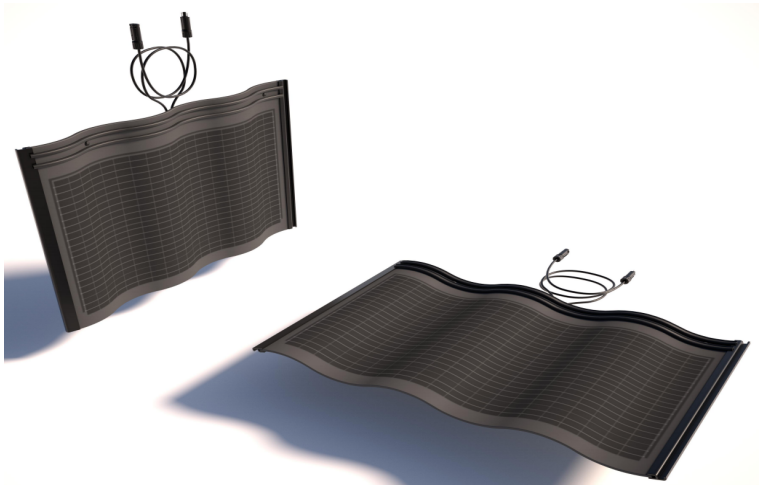

All Dimensions in mm
The above drawing is a graphical representation of the product.

Electrical Characteristics (STC/NOCT)

Module Type	BHAC40R-40
	STC
Maximum Power- Pmax(W)	40
Open Circuit Voltage - Voc(V)	13.84
Short- Circuit Current - Isc(A)	3.92
Voltage at Pmax -Vmp(V)	11.05
Current at Pmax - Imp(A)	3.62
Module Efficiency -ηm(%)	11.10
Power Tolerance(W)	(0, +4.99W)
Maximum System Voltage(V)	1500Vdc (IEC / UL)
Maximum Series Fuse Rating (A)	15A

STC : Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5

NOCT : Irradiance 800W/m², Ambient Temperature 20°C, Air Mass 1.5, Wind Speed 1m/s

Mechanical Specifications

External Dimensions	723x500x41mm
Weight	5.2kg
Solar Cells	Mono crystalline 182mm
Front Glass	5mm glass+ backsheet
Frame	/
Junction Box	IP67
Output Cables	4.0mm², 900mm (+),900mm (-), length can be customized
Connector	MC4 Compatible
Mechanical Load	Front Side Max. 5400Pa, Rear Side Max. 2400Pa
Fire Protection Grade	A
Windproof Grade	15
Anti Hail Level	25mm

Temperature Characteristics

Pmax Temperature Coefficient	-0.3904%/°C
Voc Temperature Coefficient	-0.286%/°C
Isc Temperature Coefficient	+0.0268%/°C
Operating Temperature	-40~+85°C
Nominal Operating Cell Temperature(NOCT)	45±2°C

Packing Configuration

Woden box	1140*780*700 mm
Container	40'HQ
Pieces per Wooden box	24
Box per Container	90
Pieces per Container	2160