




BIAC14B-70 70 Watt

158.75mm 14Cells All Black Solar
Tile Mono PV Module Series

Almaden Linear Warranty

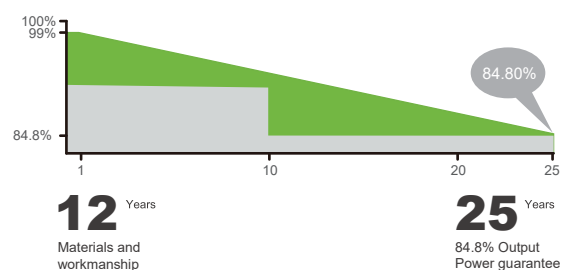

Anti-glare technology



Resists 35mm hail
Withstands 12-grade winds



25-year waterproof and
Rooftop safety guarantee



Lower summer indoor
Temperatures by 5-8°C




Reduce energy consumption
By 10%



Modular design with standardized
prefabricated construction



ALMADEN[®] - BIPV

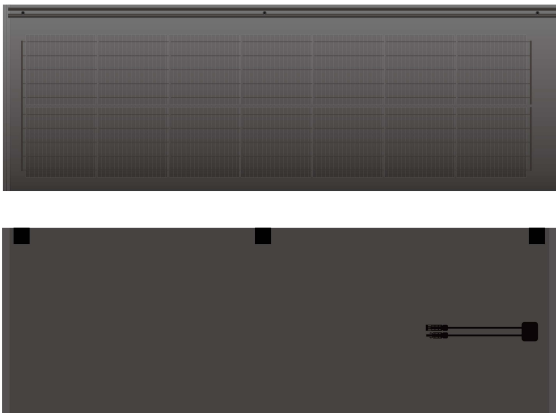

All Dimensions in mm
The above drawing is a graphical representation of the product.

Electrical Characteristics (STC/NOCT)

Module Type	BIAC14B-70
	STC
Maximum Power- Pmax(W)	70
Open Circuit Voltage - Voc(V)	9.58
Short- Circuit Current - Isc(A)	9.72
Voltage at Pmax -Vmp(V)	7.83
Current at Pmax - Imp(A)	8.94
Module Efficiency -ηm(%)	14.5
Power Tolerance(W)	(0, +4.99W)
Maximum System Voltage(V)	1500Vdc (IEC / UL)
Maximum Series Fuse Rating (A)	15A

STC : Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5 NOCT : Irradiance 800W/m², Ambient Temperature 20°C, Air Mass 1.5, Wind Speed 1m/s

Mechanical Specifications

External Dimensions	1240x390x6.2mm
Weight	7.5kg
Solar Cells	Mono crystalline 158.75mm
Front Glass	3.2+2mm tempered glass
Frame	/
Junction Box	IP68
Output Cables	4.0mm², 900mm (+),900mm (-), length can be customized
Connector	MC4 Compatible
Mechanical Load	Front Side Max. 5400Pa, Rear Side Max. 2400Pa
Fire Protection Grade	A
Windproof Grade	15
Anti Hail Level	25mm

Temperature Characteristics

Pmax Temperature Coefficient	-0.36%/°C
Voc Temperature Coefficient	-0.304%/°C
Isc Temperature Coefficient	+0.05%/°C
Operating Temperature	-40~+85°C
Nominal Operating Cell Temperature(NOCT)	45±2°C

Packing Configuration

Woden box	1320x1240x600mm
Container	40'HQ
Pieces per Wooden box	36
Box per Container	64
Pieces per Container	2304

Current-Voltage & Power-Voltage Curves (BIAC14B-70)

