

NAME : **C.S.Pugalarasan**
REG NO: **(1924121)17**
COURSE NAME : 5G 6G COMMUNICATION (ECA5601)
DATE : 12/08/2026

EX NO: 12	NB-IoT vs LTE-M Throughput Simulation
-----------	---------------------------------------

AIM: To simulate and compare the performance of NB-IoT and LTE-M communication technologies in terms of Throughput (Mbps), Latency (ms), and Packet Delivery Ratio (%)

using MATLAB.

Procedure:

1. Define system parameters for NB-IoT and LTE-M such as bandwidth, transmission power, and modulation efficiency.
2. Generate network conditions by varying Signal-to-Noise Ratio (SNR) or channel quality values.
3. Compute Throughput (Mbps) for both NB-IoT and LTE-M using their respective data rate models.
4. Calculate Latency (ms) based on transmission time, scheduling delay, and network load.
5. Determine Packet Delivery Ratio (PDR %) by comparing successfully received packets with transmitted packets.
6. Simulate multiple iterations to observe performance under different channel conditions.
7. Plot comparison graphs for Throughput, Latency, and PDR between NB-IoT and LTE-M.
8. Analyze results to identify which technology performs better under different IoT scenarios.

Objective 1 Matlab Code and Output:

```
clc;

clear;

close all;

% SNR values (dB)

SNR = 0:5:30;

% Simulated Throughput (Mbps)

NB_IoT = 0.05*(1-exp(-SNR/8));

LTE_M = 1.2*(1-exp(-SNR/8));


disp('SNR (dB) NB-IoT(Mbps) LTE-M(Mbps)')

disp([SNR' NB_IoT' LTE_M'])

figure

% ----- Graph 1 -----

subplot(2,1,1)

plot(SNR,NB_IoT,'-o','LineWidth',2)

title('NB-IoT Throughput vs SNR')

xlabel('Signal-to-Noise Ratio (dB)')

ylabel('Throughput (Mbps)')

grid on

% ----- Graph 2 -----

subplot(2,1,2)

plot(SNR,LTE_M,'-s','LineWidth',2)


title('LTE-M Throughput vs SNR')

xlabel('Signal-to-Noise Ratio (dB)')

ylabel('Throughput (Mbps)')

grid on
```

OUTPUT:

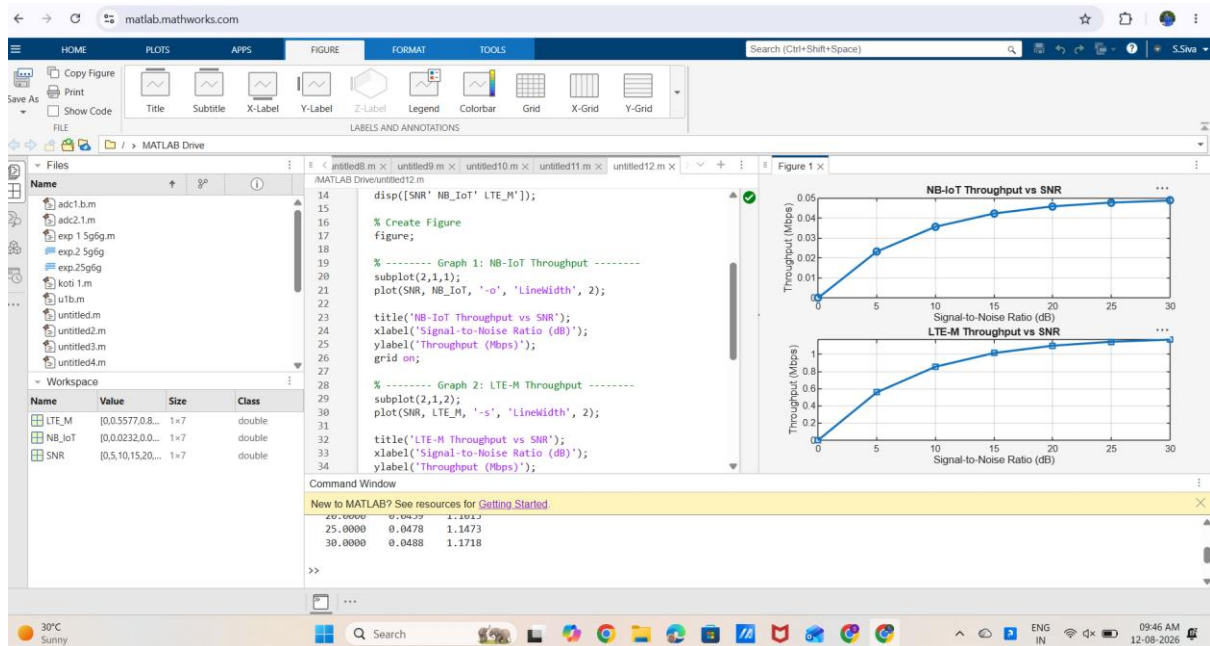

Result:

The throughput of both NB-IoT and LTE-M increases as the Signal-to-Noise Ratio (SNR) improves. LTE-M achieves significantly higher throughput than NB-IoT, making it more suitable for applications requiring higher data rates.