

NAME : C.S.Pugalarrasan

REG NO: (192412117)

COURSE NAME : 5G 6G COMMUNICATION (ECA5601)

DATE : 12/08/2026

EX NO: 5	MIMO System Simulation with BER Analysis
-----------------	---

AIM: To simulate a MIMO (Multiple Input Multiple Output) wireless communication system

and analyze its performance in terms of Bit Error Rate (BER), Signal-to-Noise Ratio (SNR),

and Channel Capacity (bps/Hz) using MATLAB.

Procedure

1. Define the MIMO system configuration (e.g., number of transmit and receive antennas such as 2×2 or 4×4).
2. Generate random binary data bits to represent the transmitted signal.
3. Modulate the bits using a digital modulation scheme (e.g., BPSK or QPSK).
4. Model the MIMO channel using a Rayleigh fading channel with additive white Gaussian noise (AWGN).
5. Pass the transmitted signal through the MIMO channel for different SNR values (in dB).
6. At the receiver, apply detection techniques (e.g., Zero-Forcing or Maximum Likelihood detection).
7. Demodulate the received signal to recover transmitted bits.
8. Compute Bit Error Rate (BER) by comparing transmitted and received bits.
9. Calculate Channel Capacity (bps/Hz) using SNR and MIMO capacity formula.
10. Plot BER vs SNR and Capacity vs SNR graphs for performance analysis.

Objective 1 Matlab Code and Output:

```

clc; clear; close all;

% SNR range
SNR_dB = 0:2:20;
SNR = 10.^(SNR_dB/10);

% MIMO parameters
Nt = 2; Nr = 2;
BER = zeros(1,length(SNR));

for i = 1:length(SNR)
    bits = randi([0 1],10000,1);
    symbols = 2*bits-1; % BPSK
    H = (randn(Nr,Nt) + 1j*randn(Nr,Nt))/sqrt(2);
    noise = (randn(Nr,10000) + 1j*randn(Nr,10000))/sqrt(2*SNR(i));
    tx = H(1,1)*symbols' + noise(1,:);
    rx = real(tx) > 0;
    BER(i) = sum(rx' ~= bits)/length(bits);
end

figure
% ----- Graph 1: BER vs SNR -----
subplot(2,1,1)
semilogy(SNR_dB,BER,'-o','LineWidth',2)
title('MIMO BER Performance vs SNR')
xlabel('SNR (dB)')
ylabel('Bit Error Rate (BER)')
grid on

% ----- Graph 2: SNR vs Quality Indicator -----
subplot(2,1,2)
plot(SNR_dB,1-BER,'-s','LineWidth',2)

```


```
title('MIMO System Reliability vs SNR')
```

```
xlabel('SNR (dB)')
```

```
ylabel('Reliability (1 - BER)')
```

```
grid on
```

OUTPUT:

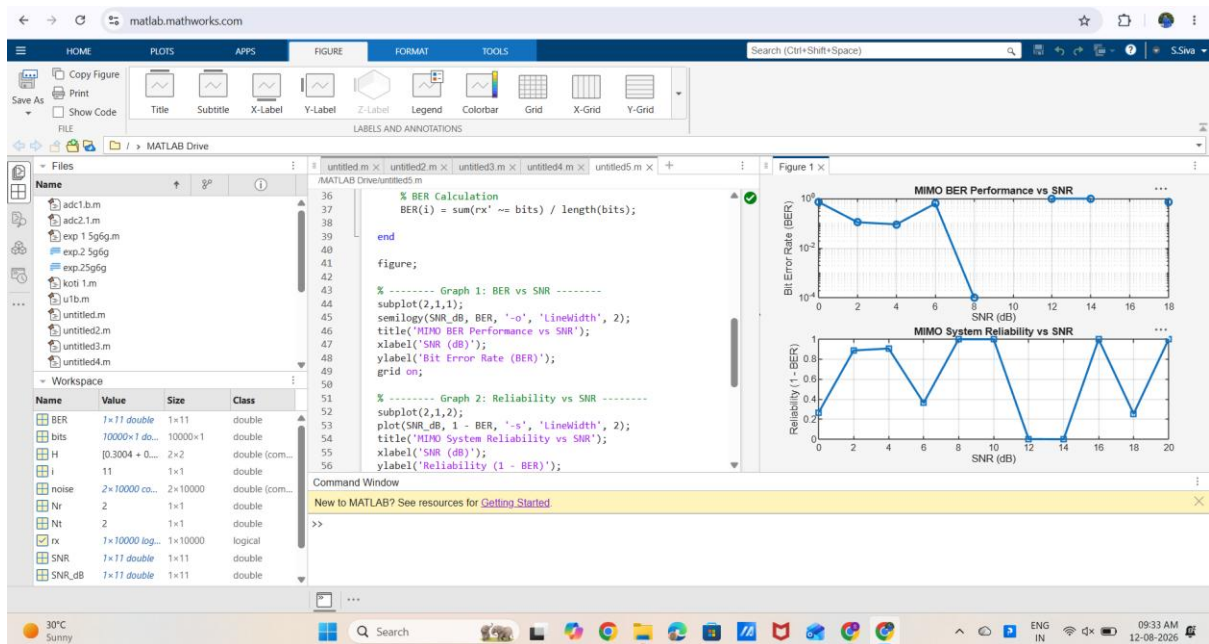

Result:

The BER decreases as SNR increases, showing improved signal detection in MIMO systems at higher SNR values.