Performance Issues :

⇒ Longest delay determines clock period.

↳ We execute one instruction per clock cycle.

⇒ Typically Load instruction takes the longest time to execute

# Sub = 8 ps
Mul = 10 ps
lw = 15 ps
sw = 13 ps

Clock period = 15 ps

∴ Total time to execute this sequence
= 15+15+15+15 = 60 ps

Vs

∴ Actual time to execute this sequence
= 8+10+15+13 = 46 ps

Time Wastage = (60 - 46) ps = 14 ps

to overcome this wastage we move on to pipelining.

(parallel execution of instruction)

Pipelining Analogy

- Pipelined laundry: overlapping execution
  - Parallelism improves performance

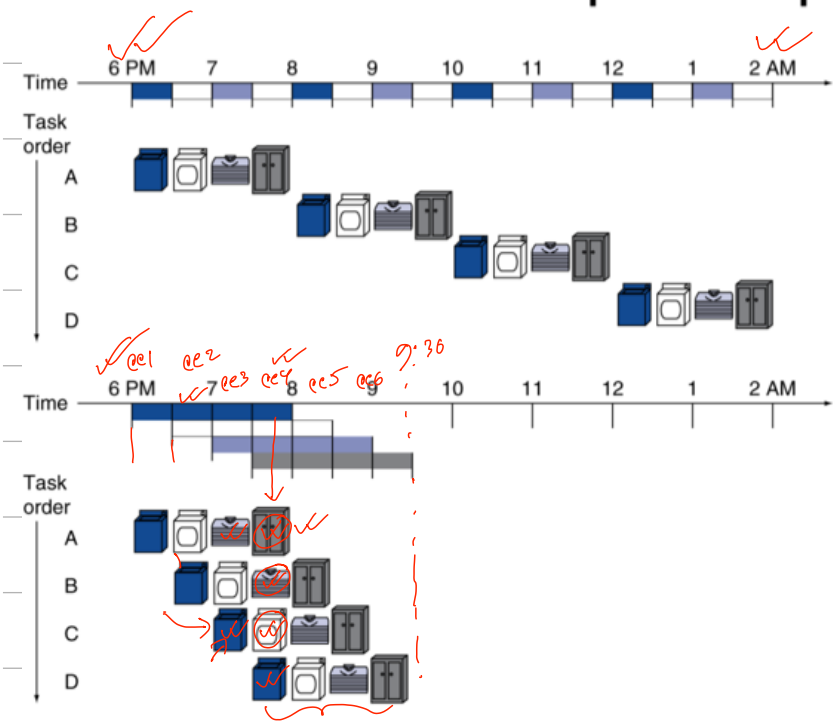

instruction: laundry
1. Wash
2. Dry
3. Fold
4. Store
[at a time, you can only Dry/Wash/Fold/Store 1 cloth]

RISC-V Pipeline

- Five stages, one step per stage
  1. IF: Instruction fetch from memory
  2. ID: Instruction decode & register read
  3. EX: Execute operation or calculate address
  4. MEM: Access memory operand
  5. WB: Write result back to register

Pipeline Performance

- Assume time for stages is
  - 100ps for register read or write
  - 200ps for other stages
- Compare pipelined datapath with single-cycle datapath

Instr	Instr fetch	Register read	ALU op	Memory access	Register write	Total time
ld	200ps	100 ps	200ps	200ps	100 ps	800ps
sd	200ps	100 ps	200ps	200ps		700ps
R-format	200ps	100 ps	200ps		100 ps	600ps
beq	200ps	100 ps	200ps			500ps

Pipeline Performance

Clock Period = Highest duration to complete an instruction

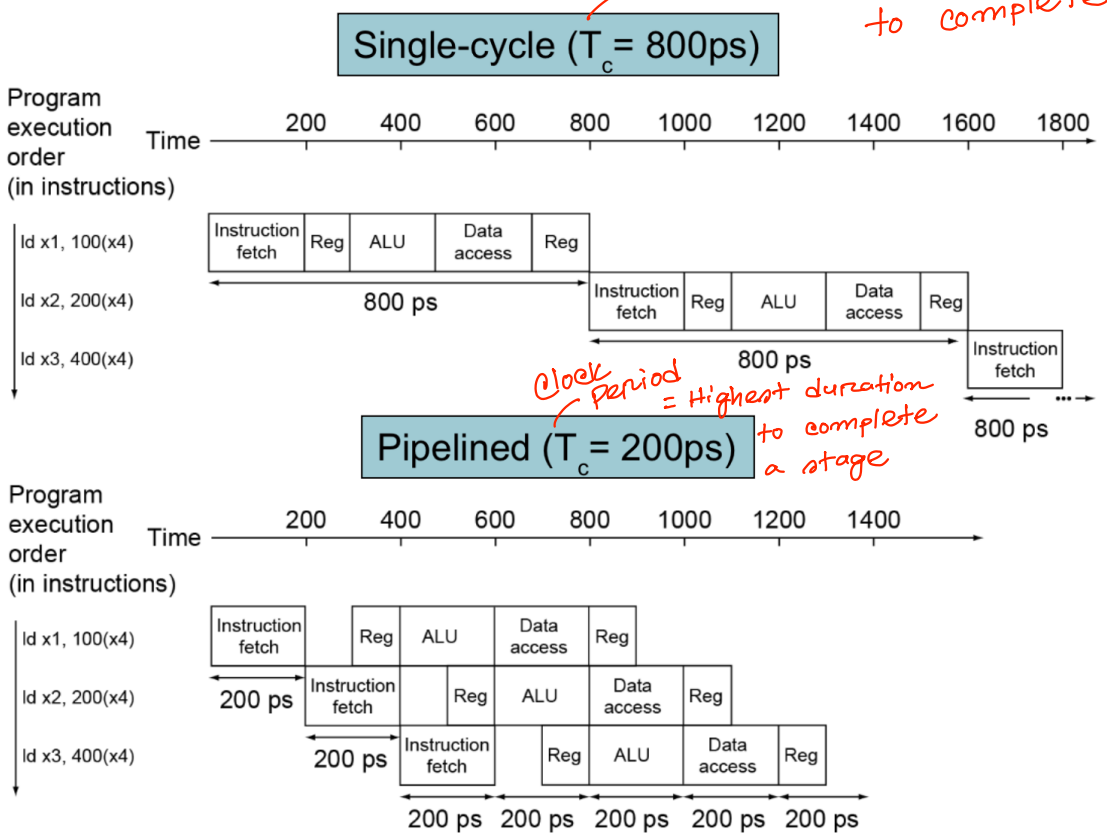

Pipelined Datapath

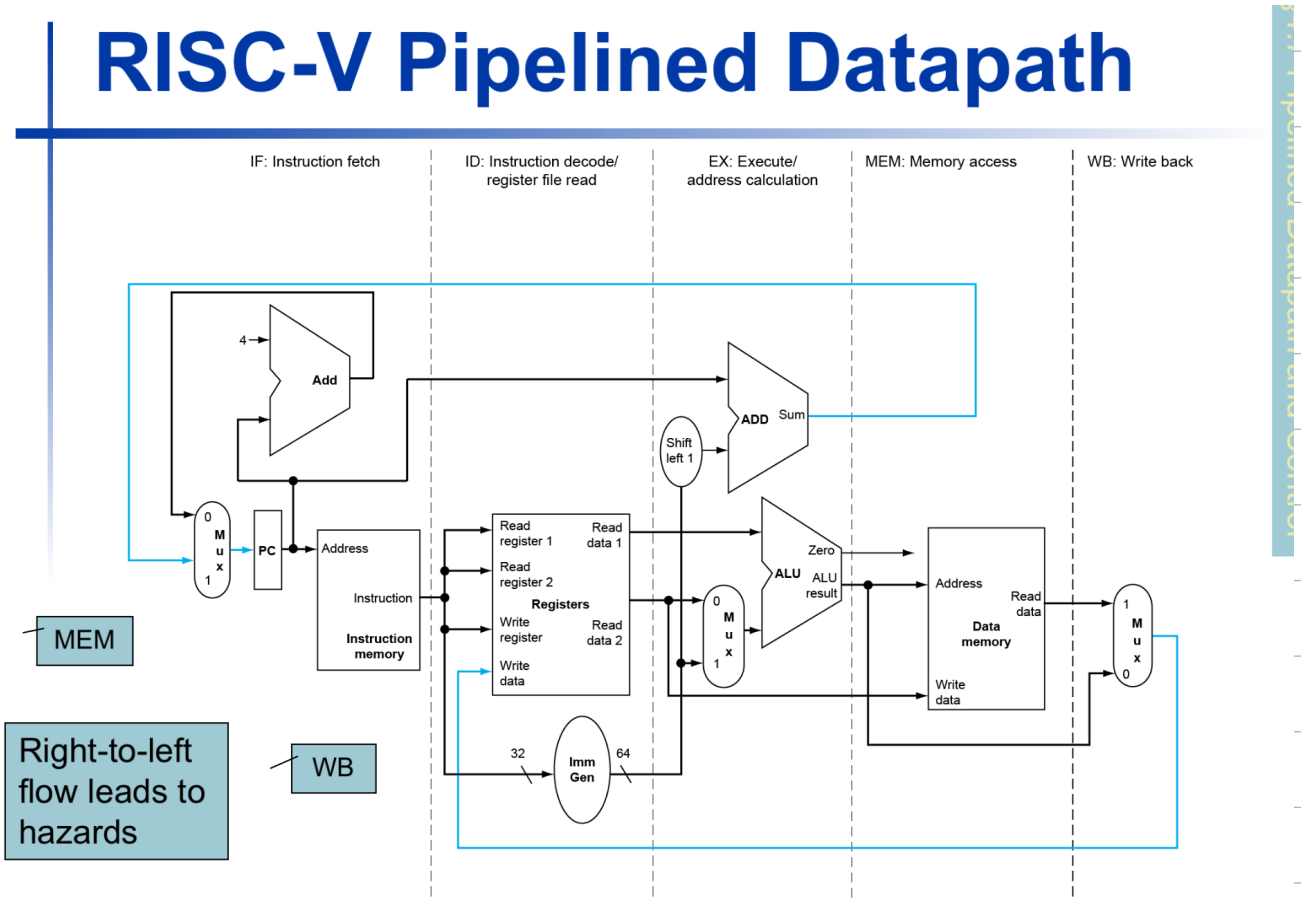

Data Hazard

Add x21, x22, x23

Sub x24, x21, x20

	cc1	cc2	cc3	cc4	cc5	cc6
Add	IF	ID	EX	MEM	WB	
Sub		IF	ID	EX	MEM	WB

x21, x20

Structural Hazard