Experient-4

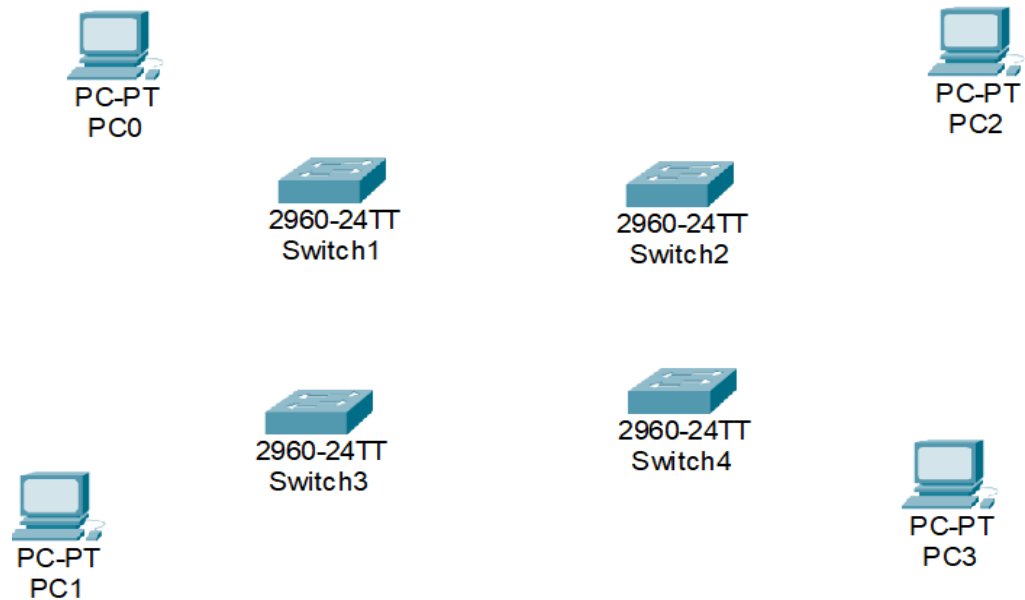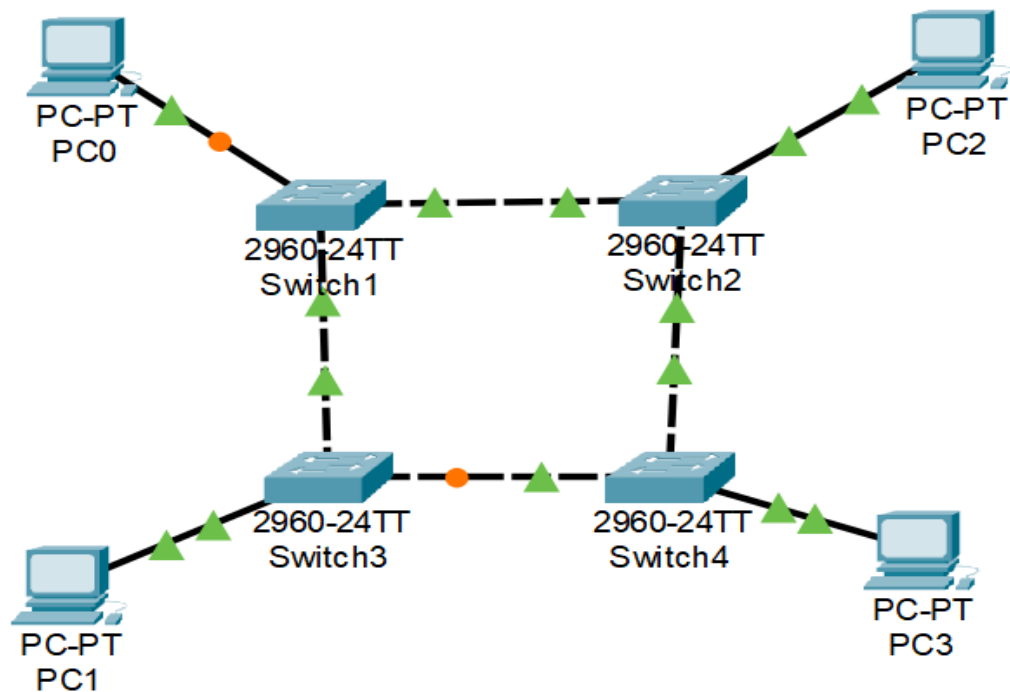## Design and Configuration of RING Topologies using Packet Tracer.

Step1: 4 switches and 4 PCs

Step2: connect fast ethernets from switch to switch and switch to PCs

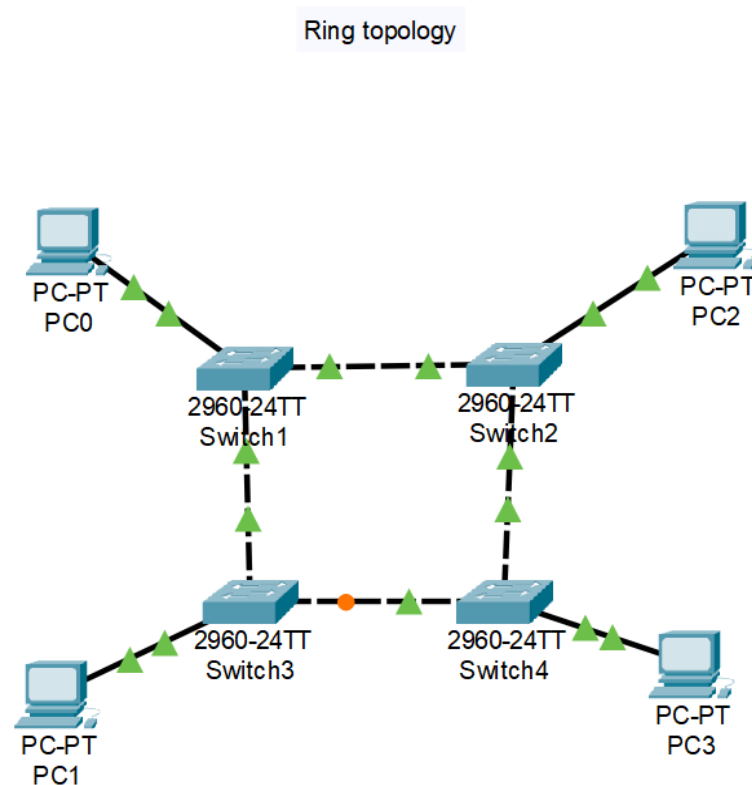**Step3:** Assign IP address for each PCs

IP address for PC0:192.168.1.1

IP address for PC1: 192.168.1.2

IP address for PC2: 192.168.1.3

IP address for PC3: 192.168.1.4

Step4: allocate the message

Ring topology

Result: message sent successfully from PC1-PC2