

Manufacturing documentation:

Drill Drawing View (Scale 2:1)

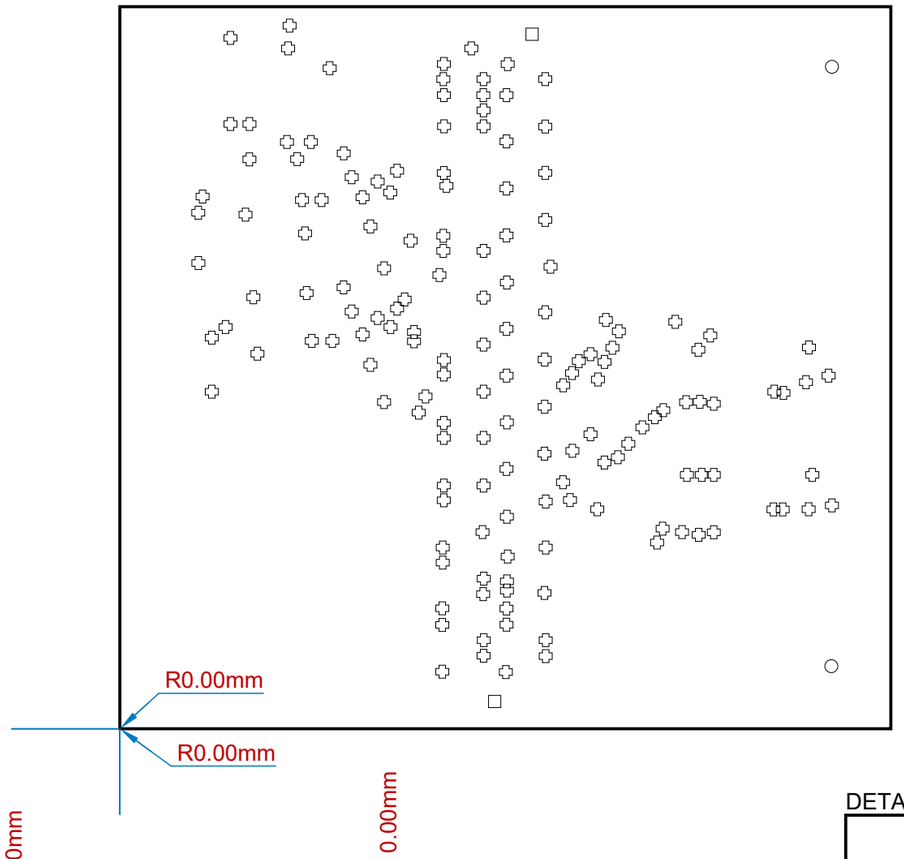


Board Layer Stack

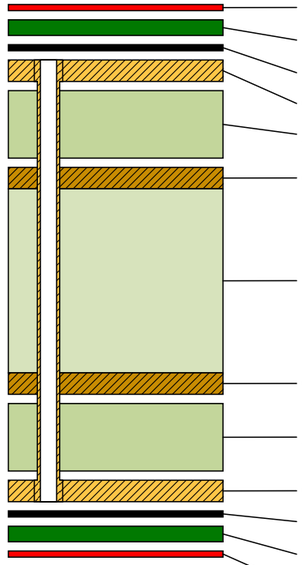


Material	Layer	Thickness	Dielectric Material	Type	Gerber	Comments	Dk	Frequency
	Top Overlay			Legend	GTO			
Surface Material	Top Solder	0.03mm	SM-001	Solder Mask	GTS	black	4	1GHz
Nickel, Gold	Top Surface Finish	0.00mm		Surface Finish				
CF-004	Top Layer	0.04mm		Signal	GTL			
Prepreg		*0.11mm*	*PP-017*	*Dielectric*		-	*4.29*	*1GHz*
CF-004	GND	0.04mm		Internal Plane	GP1			
Core		*1.20mm*	*Core-039*	*Dielctric*		-	*4.8*	*1GHz*
CF-004	PWR	0.04mm		Internal Plane	GP2			
Prepreg		*0.11mm*	*PP-017*	*Dielectric*		-	*4.29*	*1GHz*
CF-004	Bottom Layer	0.04mm		Signal	GBL			
Nickel, Gold	Bottom Surface Finish	0.00mm		Surface Finish				
Surface Material	Bottom Solder	0.03mm	SM-001	Solder Mask	GBS	black	4	1GHz
	Bottom Overlay			Legend	GBO			

Total thickness: 1.62mm

DETAIL A

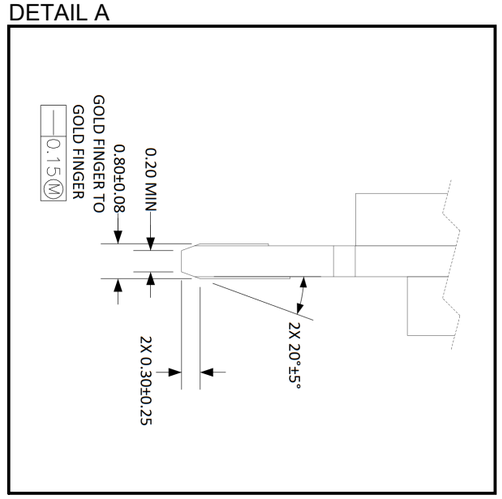

View from Top side (Scale 1:1)

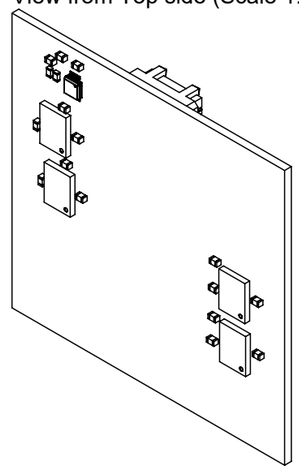

Drill Table

Symbol	Count	Hole Size	Plated	Hole Tolerance
✣	158	0.30mm	Plated	
□	2	1.27mm	Non-Plated	
○	2	3.20mm	Plated	
	162 Total			

Notes:

1. impedance matched stackup
2. 0.1mm trace width / clearance

ETH zürich

Project: uSD Card Module

Drawing number: Rev: PA

Format: A3

Laboratory: IIS

Sheet: FMC_4_Hyper_fabrication.PCBDwf

Date: 1/27/2025

Drawn by: MAYERPH

Page: 1 of 1

File: D:\Arya\Git_Repos\fmc_peripheral_boards\06_FMC_HyperRam_4X512Mbits\FMC_4_Hyper_fabrication.PCBDwf