

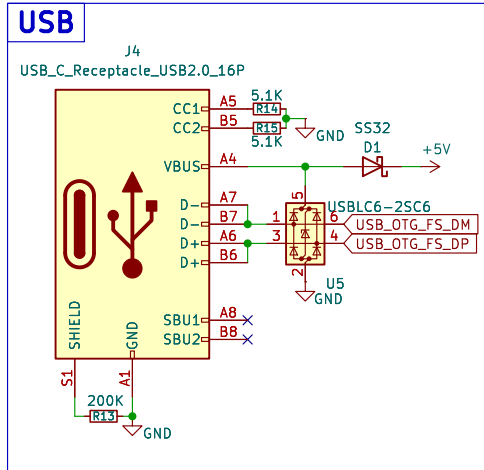
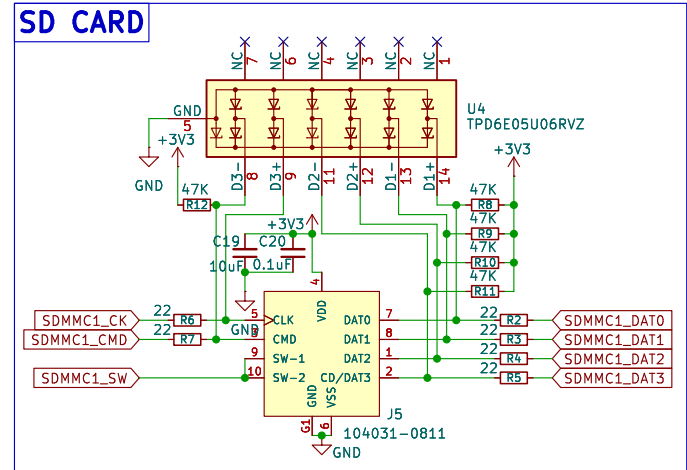
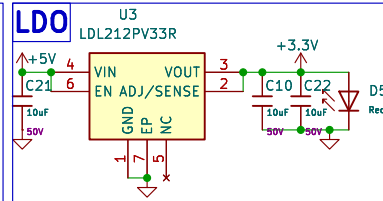



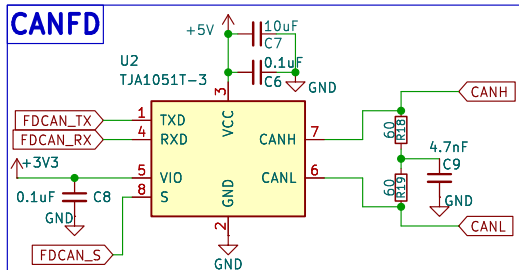

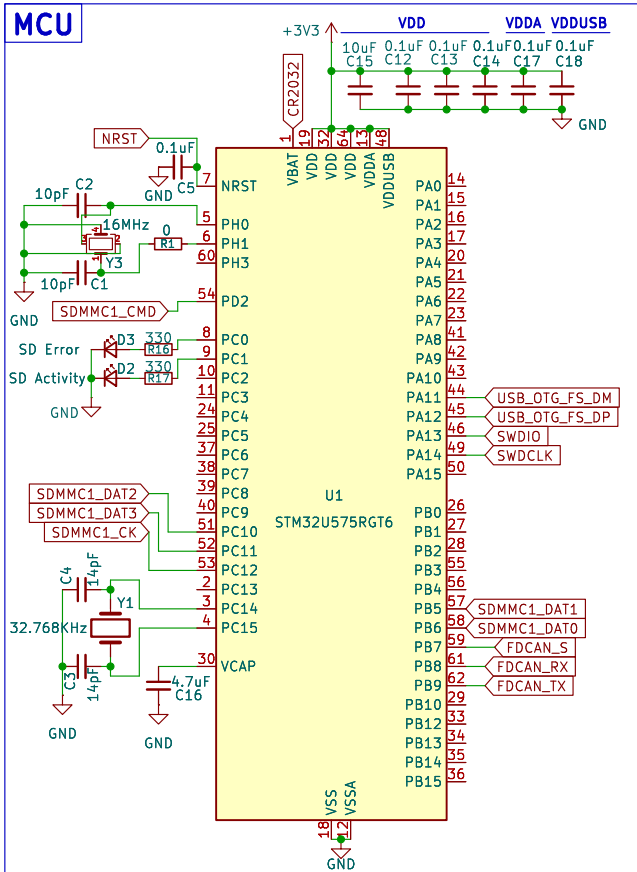


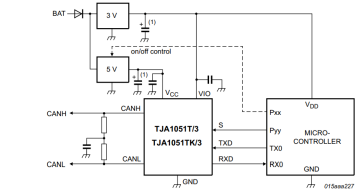

SDMMC pins to the SD Card not as shown below.

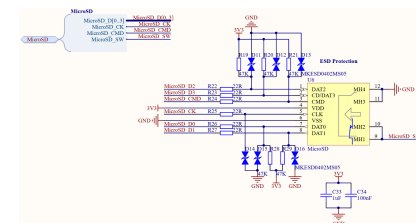

(1) Optional, depends on regulator.
Fig 6. Typical application of the TJA1051T/3 or TJA1051TK/3.

16MHz crystal has a load capacitance of 10pF
32.768KHz has a load capacitance of 12.5pF
16MHz Ask Cosmin
32.768KHz ABS07-32.768KHZ-T

R1 value will be determined when we have the pcb
0 Ohm until then

VBAT charging must be disabled in CubelIDE before programming can start

VDDA – ADCs/DACs/OPAMPs/COMPs/VREFBUF start
VDDUSB – separate power supply for USB transceiver

Pulsar UPB

Sheet: /
File: CanSnif.kicad_sch

Title: CanSnif

Size: A4
KiCad E.D.A. 9.0.4

Date: 2026-03-03

Rev:
Id: 1/1