

## DI-16

## Intersection: Lane Adjacent to Left Turn Lane Closed

## Multi-Lane Divided

Mobile Operations

Intermittent

Very Short Duration

Short Duration


Long Duration

## NOTES

i) Repeated median signing required for Long Duration only.

ii) If space permits, use TC-53A or TC-53B to surround the Work Area, otherwise reduce spacing between TC-54.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

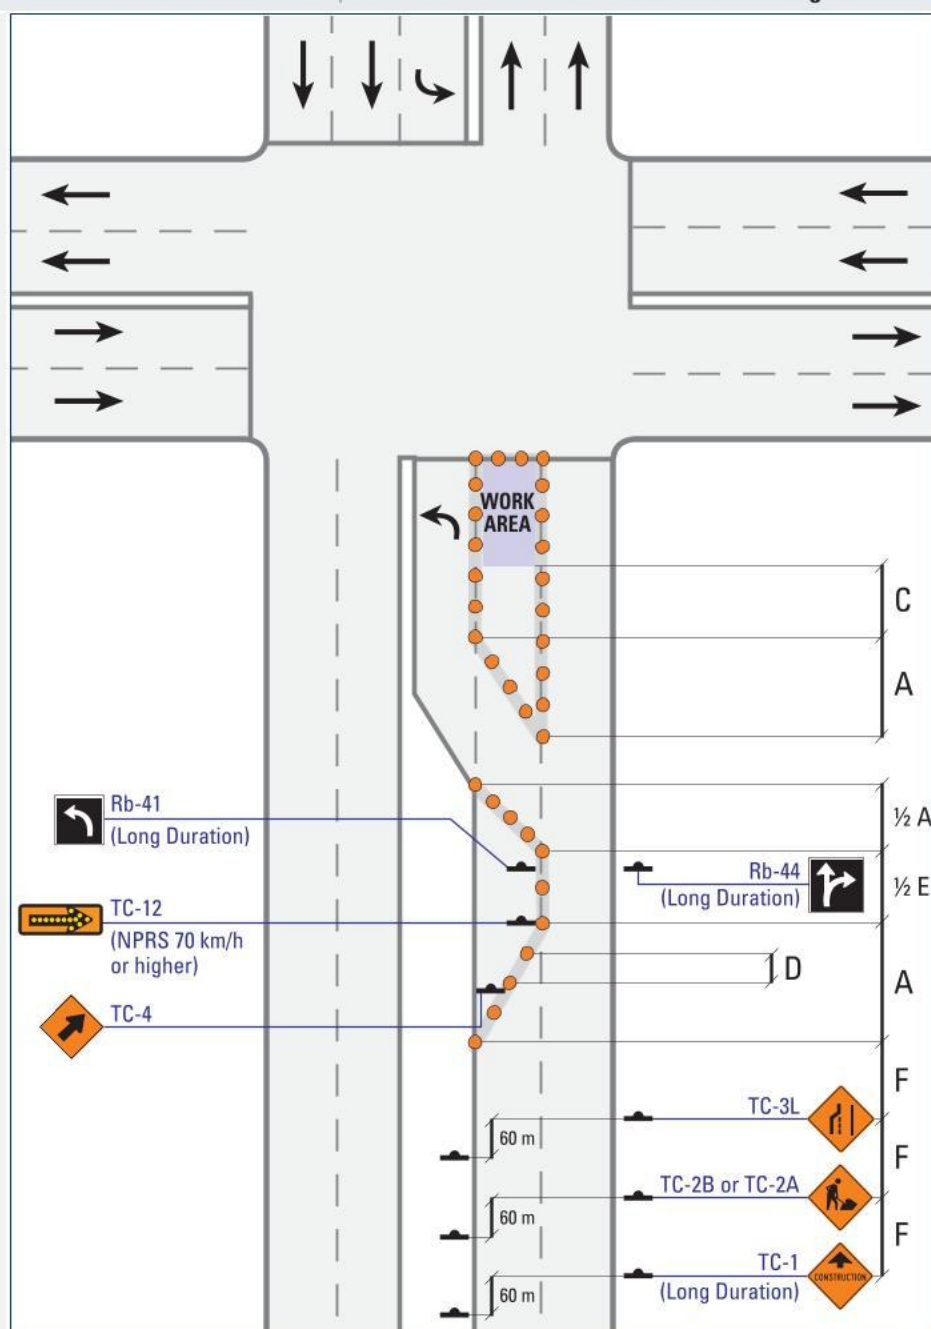

## Normal Posted Regulatory Speed (km/h)

| Label | Description                             | 50   | 60   | 70  | 80  | 90  |
|-------|-----------------------------------------|------|------|-----|-----|-----|
| A     | Taper Length for Full Lane Closure (m)  | 60   | 85   | 155 | 180 | 200 |
| C     | Longitudinal Buffer Area (LBA) (m)      | (30) | (40) | 50  | 60  | 75  |
| D     | Maximum Distance between Markers (m)    | 6    | 9    | 9   | 12  | 12  |
|       | Minimum Number of Markers for Taper     | 5    | 7    | 9   | 11  | 13  |
| E     | Minimum Tangent between Tapers (m)      | 60   | 85   | 155 | 180 | 200 |
| F     | Distance between Construction Signs (m) | 50   | 90   | 120 | 140 | 150 |