

DI-17**Intersection: Right Turn Lane (Far-Side Right Lane Closed)****Multi-Lane Divided**

Mobile Operations

Intermittent

Very Short Duration


Short Duration

Long Duration

NOTES

- i) If space permits, use TC-53A or TC-53B to surround the Work Area, otherwise reduce spacing between TC-54.
- ii) It may be necessary to prohibit certain turning movements.
- iii) It may be necessary to prohibit right turn truck movements.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

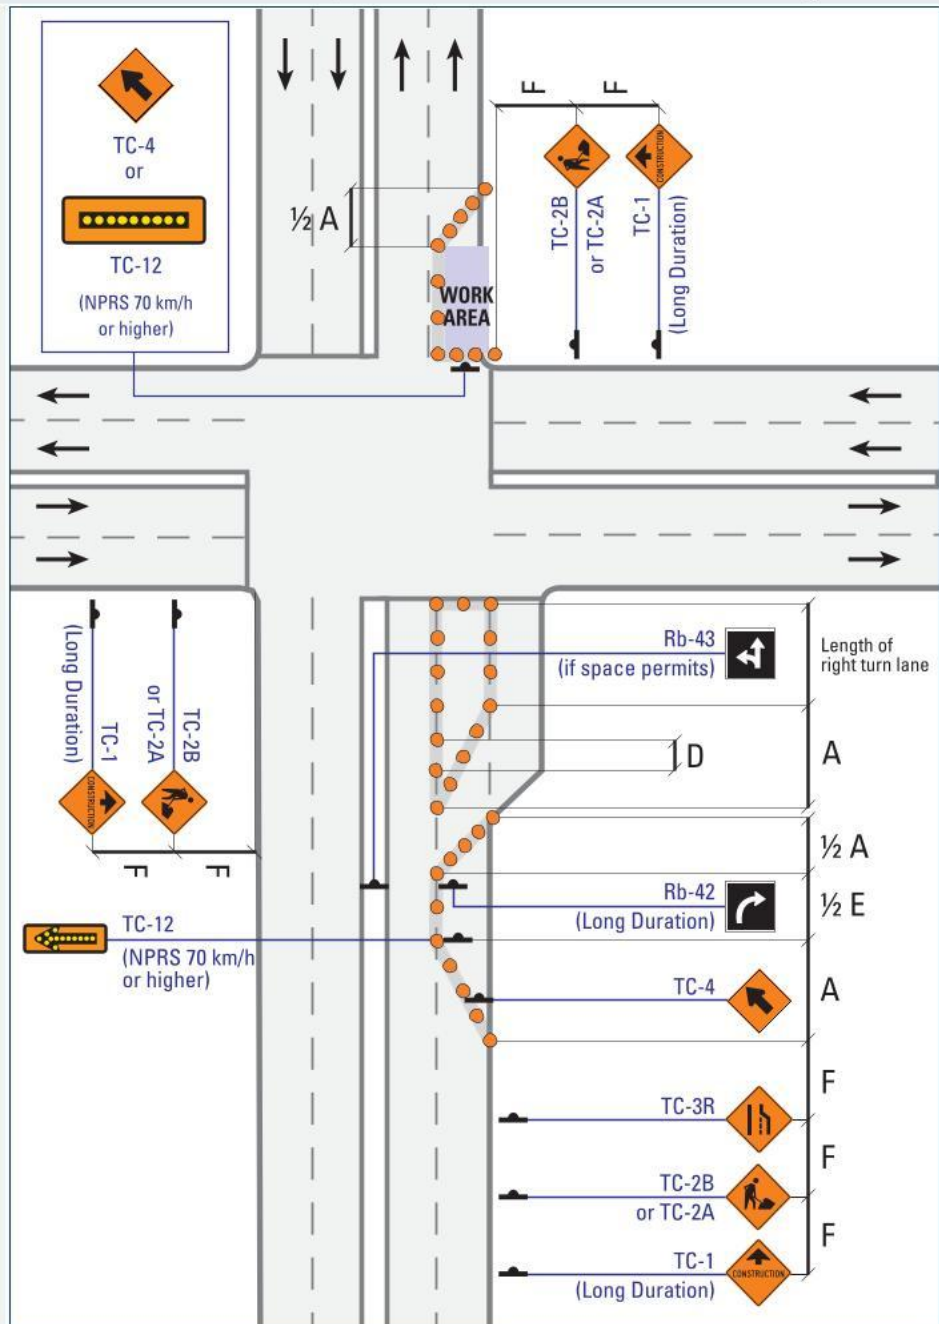

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
E	Minimum Tangent between Tapers (m)	60	85	155	180	200
F	Distance between Construction Signs (m)	50	90	120	140	150