

**DI-21****Intersection: Left Turn Adjacent Through Lanes Closed****Multi-Lane Divided**

## Mobile Operations

## Intermittent

**Very Short Duration**

## Short Duration


## Long Duration

**NOTES**

i) If space permits, use TC-53A or TC-53B to surround the Work Area, otherwise reduce spacing between TC-54.

ii) It may be necessary to prohibit left turns in the direction reduced to one lane.

For further detail on Work Zone components, see [Table A \(Mobile/Intermittent/Very Short, pg. 240\)](#).

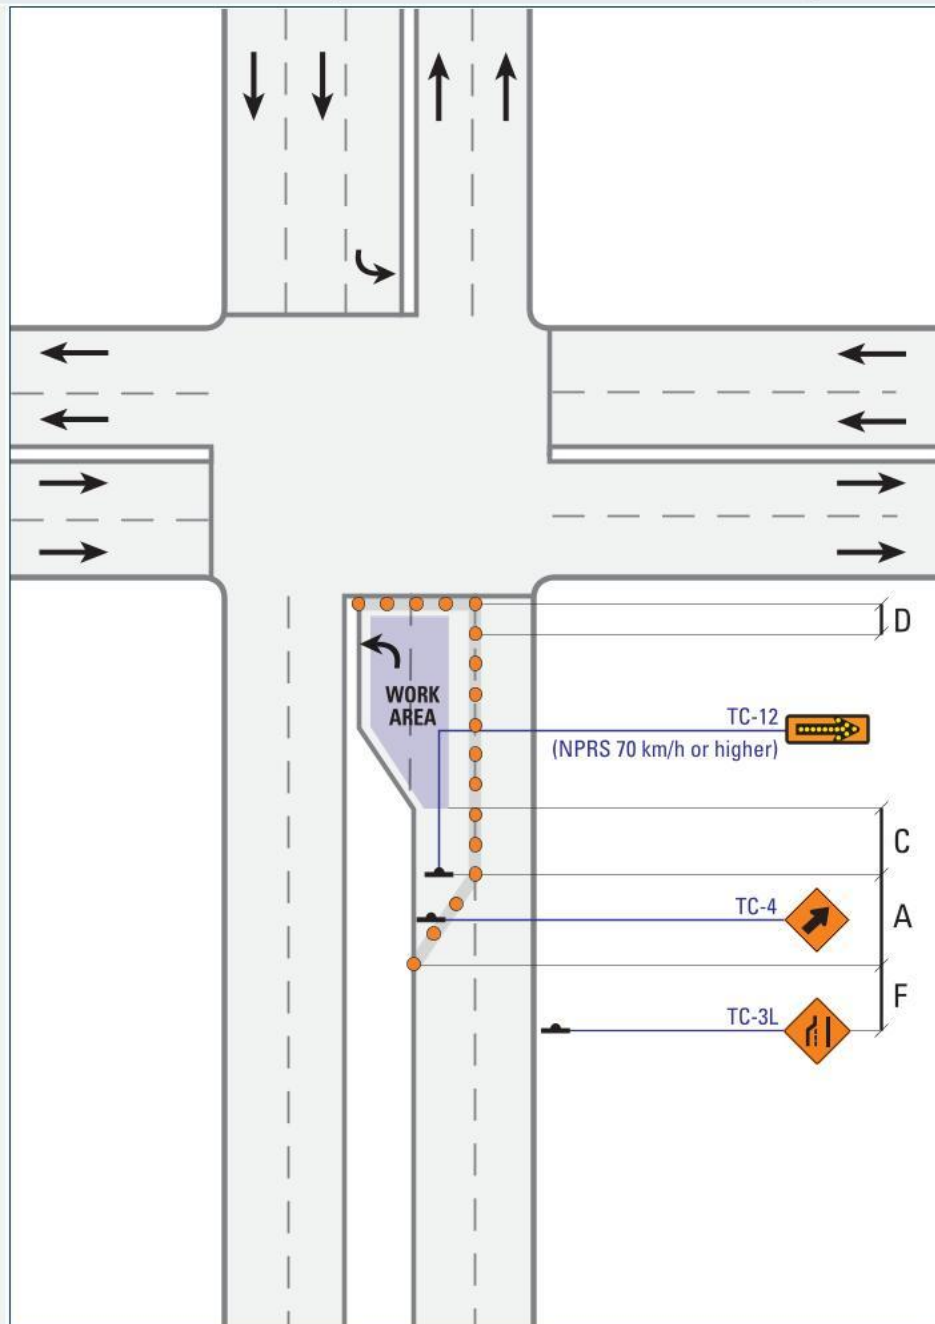

| Label    | Description                             | Normal Posted Regulatory Speed (km/h) |      |     |     |     |
|----------|-----------------------------------------|---------------------------------------|------|-----|-----|-----|
|          |                                         | 50                                    | 60   | 70  | 80  | 90  |
| <b>A</b> | Taper Length for Full Lane Closure (m)  | 60                                    | 85   | 100 | 100 | 110 |
| <b>C</b> | Longitudinal Buffer Area (LBA) (m)      | (30)                                  | (40) | 50  | 60  | 75  |
| <b>D</b> | Maximum Distance between Markers (m)    | 6                                     | 6    | 9   | 9   | 12  |
|          | Minimum Number of Markers for Taper     | 4                                     | 5    | 5   | 7   | 8   |
| <b>F</b> | Distance between Construction Signs (m) | 30                                    | 30   | 60  | 60  | 80  |