

DI-24**Work in Intersection: Left Lane Closed****Multi-Lane Divided**

Mobile Operations

Intermittent

Very Short Duration

Short Duration

Long Duration

NOTES

i) If space permits, use TC-53A or TC-53B to surround the Work Area, otherwise reduce spacing between TC-54.


ii) It may be necessary to prohibit additional turning movements.

iii) Flashing Amber Light above TC-7 must not be used at intersections with active signals.

iv) See DS-17 "Route Detour", for applicable layout.

*The TC-4 sign must be installed at or just beyond the beginning of a lane closure taper.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

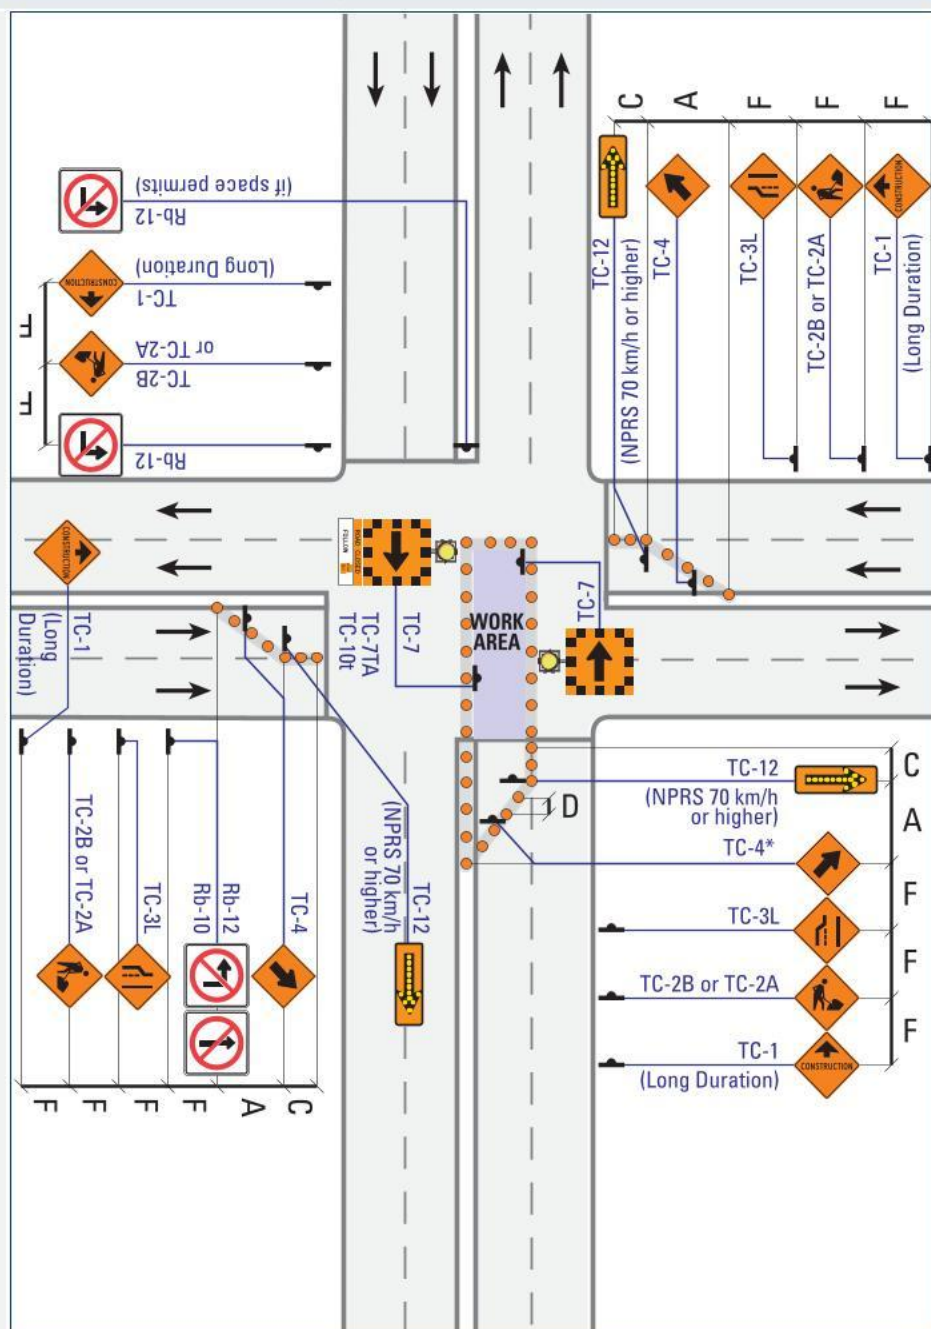

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60	75
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150