

DO-5

Roundabout: Left Exit or Partial Outside Lane Closed

Multi-Lane Divided

Mobile Operations

Intermittent

Very Short Duration

Short Duration


Long Duration

NOTES

i) It may be necessary to leave a wider lane width if there is a high truck percentage.

*The TC-4 sign must be installed at or just beyond the beginning of a lane closure taper.

For further detail on Work Zone components, see [Table A \(Mobile/Intermittent/Very Short, pg. 240\)](#).

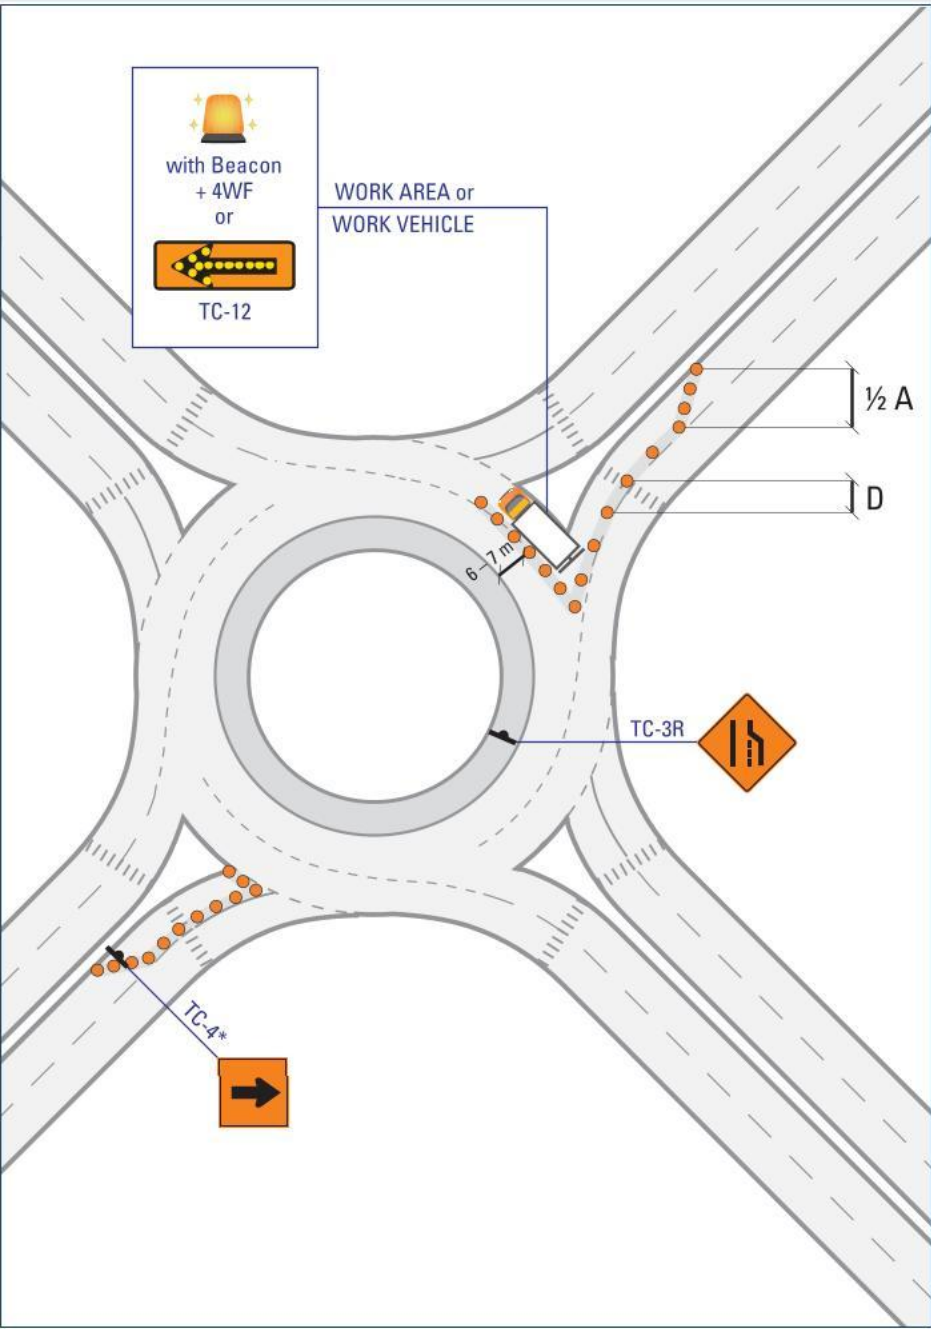

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	100	100	100
D	Maximum Distance between Markers (m)	6	6	9	9	12
Minimum Number of Markers for Taper		4	5	5	7	8