

DO-9**Roundabout: One Exit Closed (Detour)****Multi-Lane Divided**

Mobile Operations

Intermittent

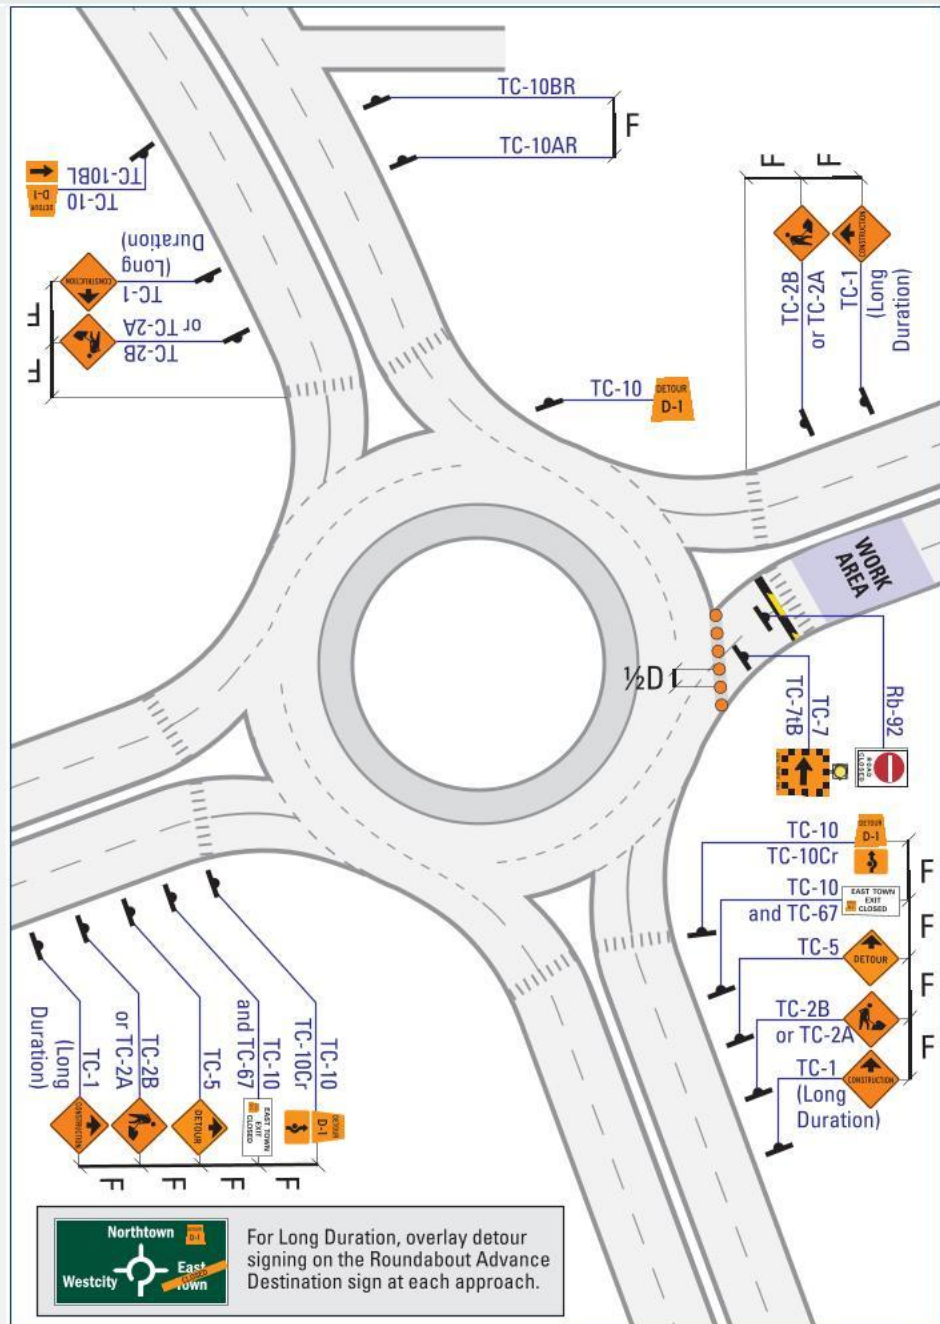
Very Short Duration

Short Duration**Long Duration****NOTES**

i) See DS-17 and DS-18 for Detour signing in advance and beyond the Roundabout.

ii) Any existing signs that contradict or that are duplicated should be covered.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

**Normal Posted Regulatory Speed (km/h)**

Label	Description	50	60	70	80	90
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150