

DR-2

Lane Closed at Exit Ramp with a Deceleration Lane

Multi-Lane Divided

Mobile Operations

Intermittent

Very Short Duration

Short Duration


Long Duration

NOTES

i) For Right Lane Closed, see DS-15.

ii) In the immediate area of the exit, Marker spacings of half of those shown on Table B should be used.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

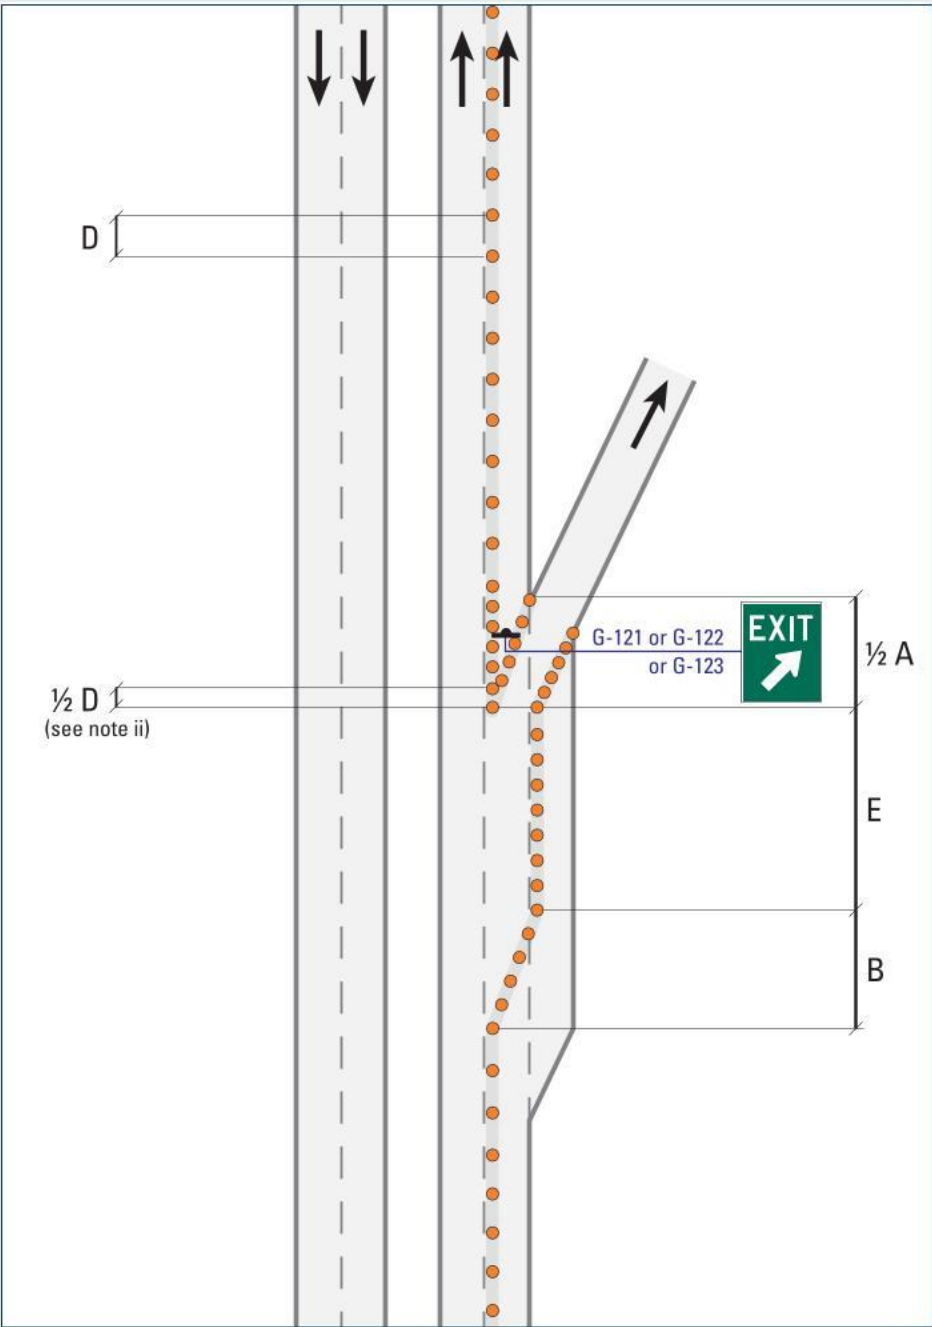

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
B	Shoulder Taper (m)	20	30	55	60	70
D	Maximum Distance between Markers (m)	6	9	9	12	12
Minimum Number of Markers for Taper		5	7	9	11	13
E	Minimum Tangent between Tapers (m)	60	85	155	180	200