

DR-3**Lane Closed at Entrance Ramp****Multi-Lane Divided**

Mobile Operations

Intermittent

Very Short Duration

Short Duration


Long Duration

NOTES

- i) For Right Lane Closed, see DS-15.
- ii) Where space and work activities permit, the acceleration lane should be made as long as possible.
- iii) In the immediate area of the entrance, Marker spacings of half of those shown on Table B should be used.

*The TC-4 sign must be installed at or just beyond the beginning of a lane closure taper.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

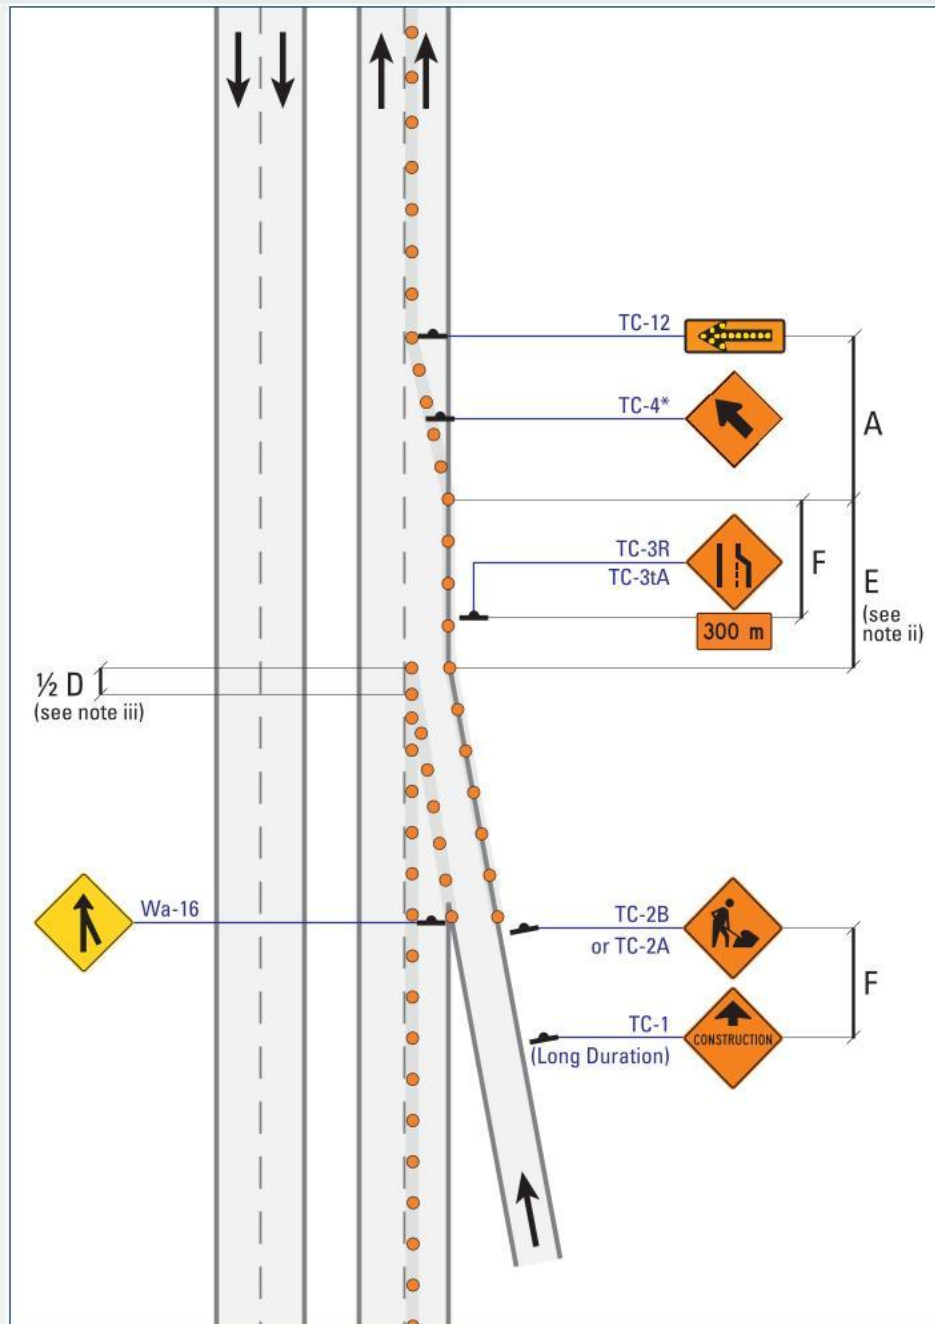

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
E	Minimum Tangent between Tapers (m)	60	85	155	180	200
F	Distance between Construction Signs (m)	50	90	120	140	150