

DR-4**Lane Closed at Entrance Ramp with an Acceleration Lane****Multi-Lane Divided**

Mobile Operations

Intermittent

Very Short Duration

Short Duration

Long Duration

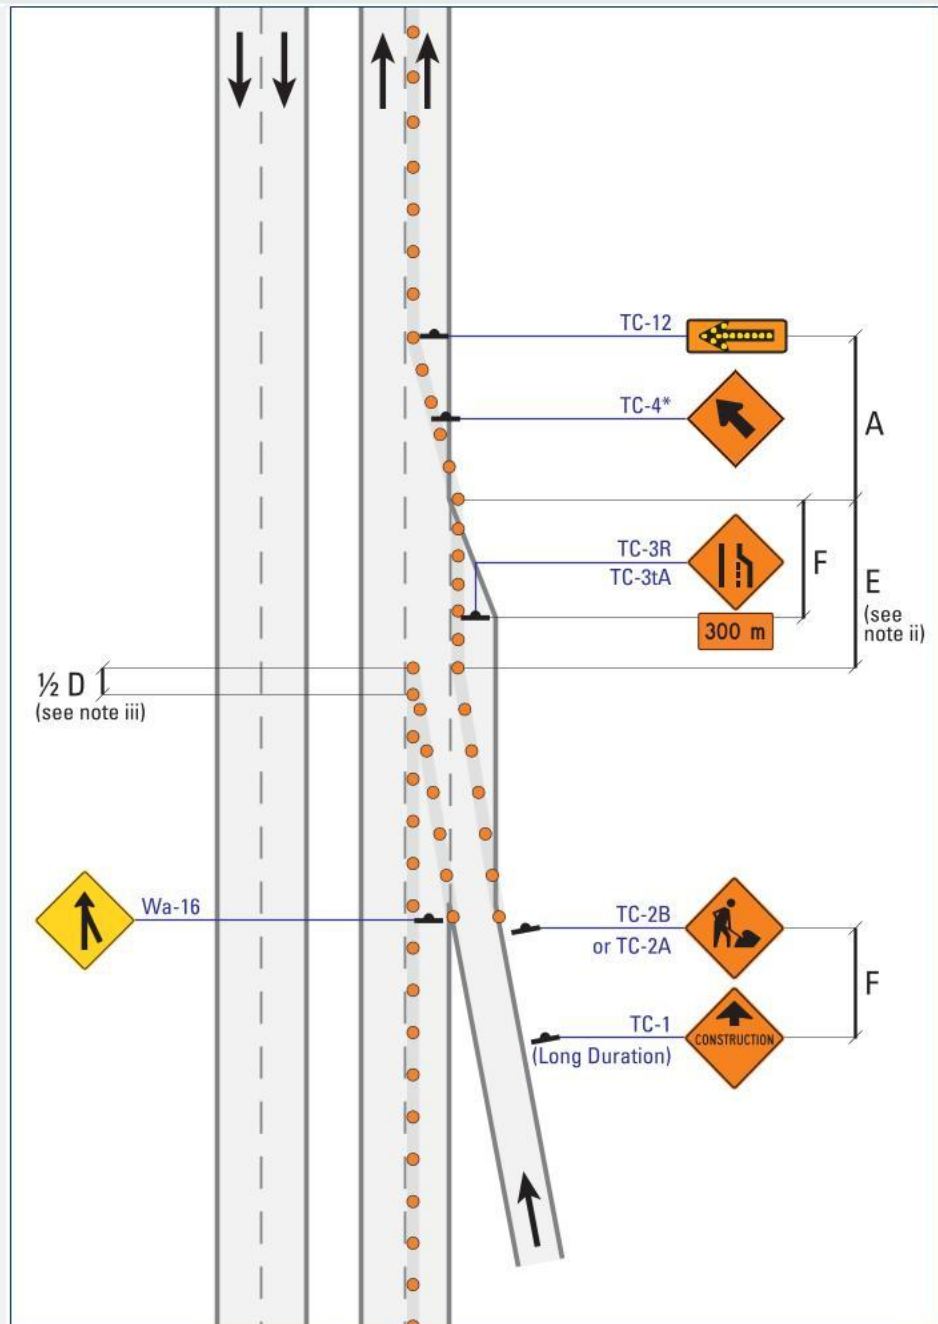
NOTES

i) For Right Lane Closed, see DS-15.

ii) Where space and work activities permit, the acceleration lane should be made as long as possible.

iii) In the immediate area of the entrance, Marker spacings of half of those shown on Table B should be used.

*The TC-4 sign must be installed at or just beyond the beginning of a lane closure taper.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
E	Minimum Tangent between Tapers (m)	60	85	155	180	200
F	Distance between Construction Signs (m)	50	90	120	140	150