

DS-10**Partial Lane Shift: Narrow Lanes****Multi-Lane Divided**

Mobile Operations

Intermittent

Very Short Duration

Short Duration


Long Duration

NOTES

i) Minimum lane width is 3 m. Additionally, an offset of 0.3 m to 0.6 m between Markers and the edge of the traveled lane is desirable.

ii) For narrowed lanes exceeding 2 km, use a TC-16 EL (ER) in place of the TC-9L (R). Add an additional TC-16 ER (EL) at the beginning of end Taper.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

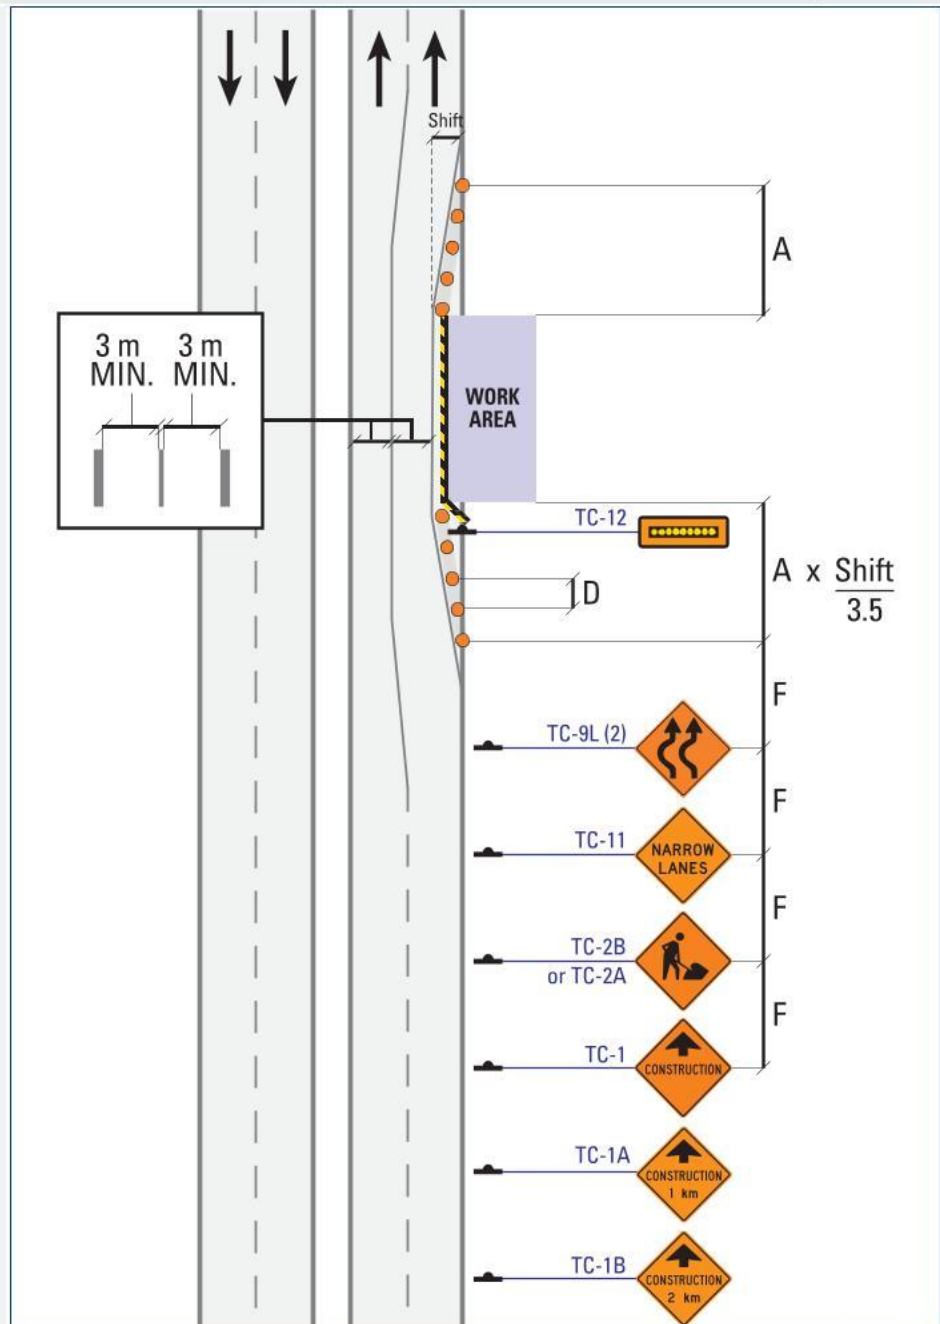

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150