

DS-11**Lane Realignment****Multi-Lane Divided**

Mobile Operations

Intermittent

Very Short Duration

Short Duration

Long Duration**NOTES**


i) Refer to OTM Book 6 for the appropriate placement of TC-18L.

ii) Markers used for additional Delineation through Tangent on the far-side of the Work Area are optional.

iii) If the space in median is not sufficient, then US-11 should be used.

iv) Work on the right shoulder: mirror image.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

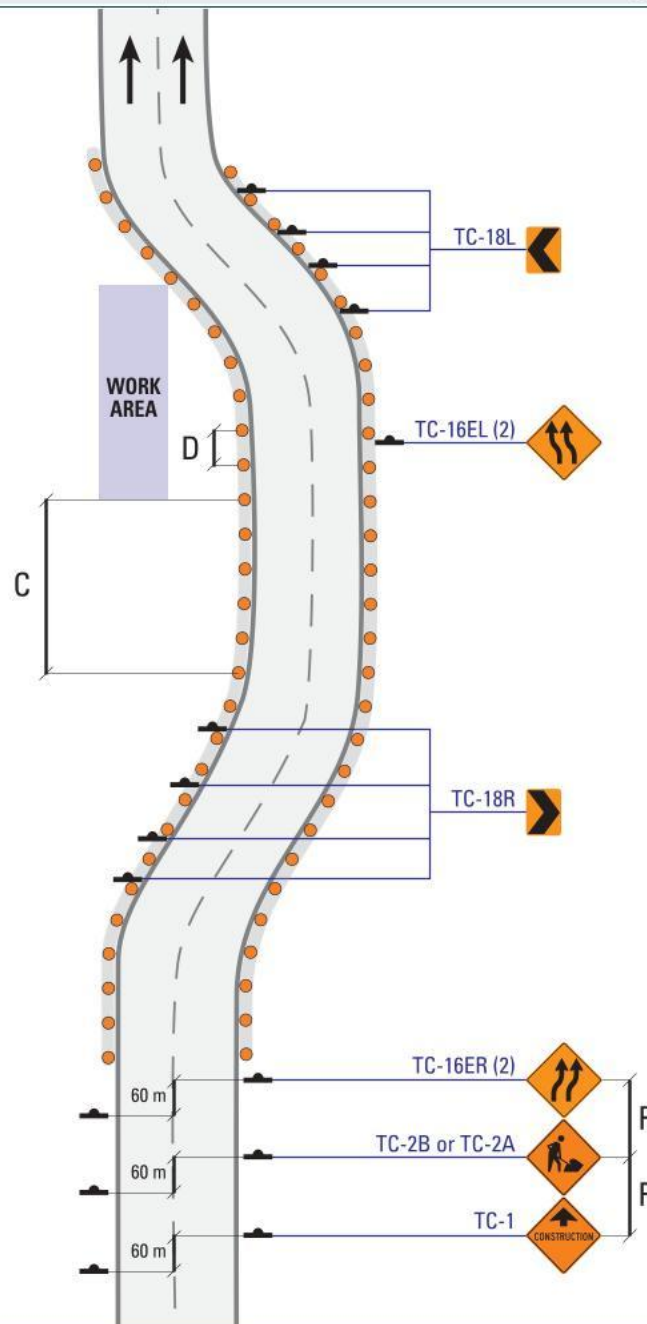

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60	75
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150