

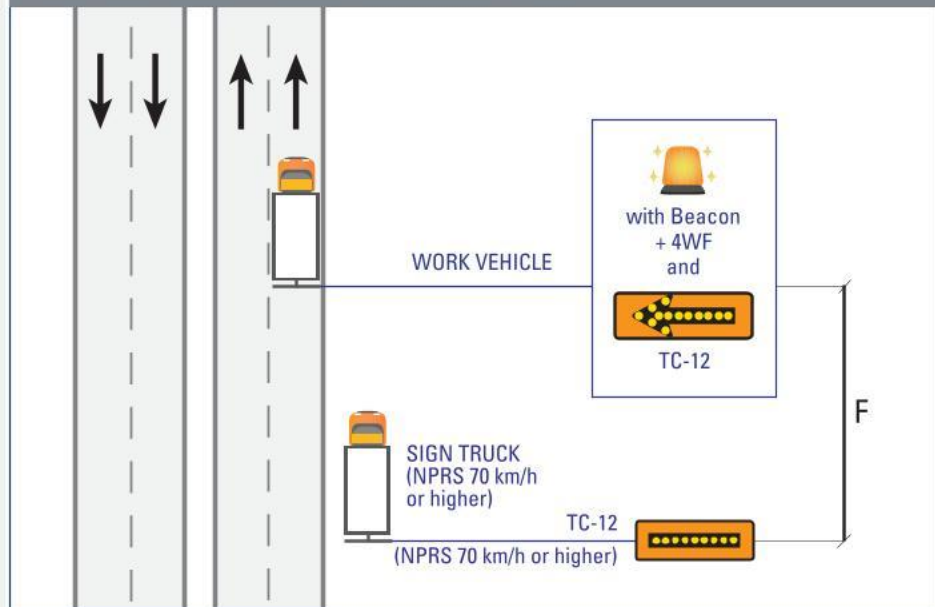
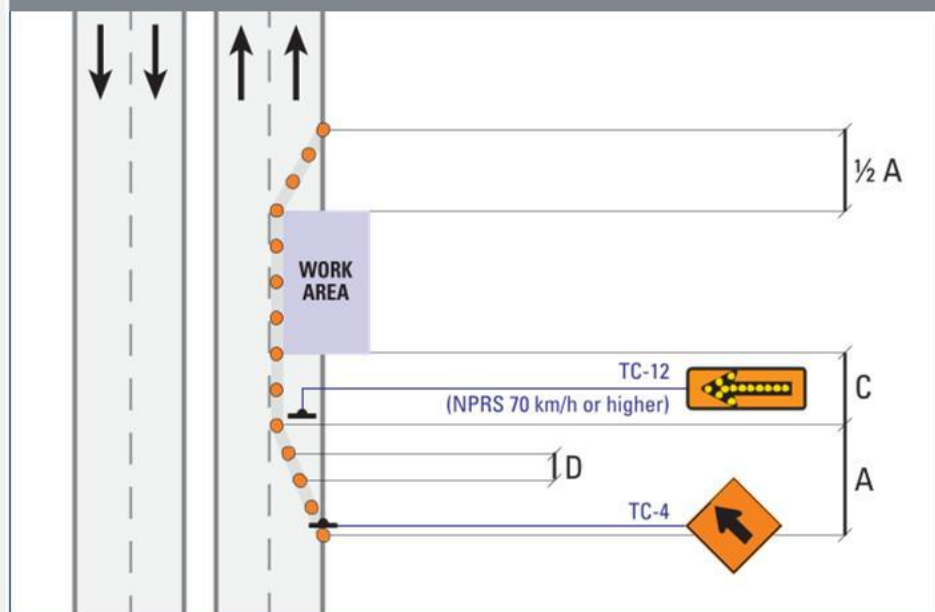
DS-13**Lane Closed or Occupied****Multi-Lane Divided****Mobile Operations****Intermittent****Very Short Duration****Short Duration****Long Duration****NOTES**

i) Distance between Sign Truck and Work Vehicle may be adjusted to accommodate hills, curves, restricted visibility, or other site specific conditions.

ii) Where shoulder is intermittent, Sign Truck should drive with traffic flow until shoulder becomes available.

iii) Left Lane Closed: mirror image.

For further detail on Work Zone components, see [Table A \(Mobile/Intermittent/Very Short, pg. 240\)](#).

With Work Vehicle – Mobile, Intermittent, or VSD**Without Work Vehicle – VSD**

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	100	100	110
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60	75
D	Maximum Distance between Markers (m)	6	6	9	9	12
	Minimum Number of Markers for Taper	4	5	5	7	8
F	Distance between Construction Signs (m)	30	30	60	60	80