

DS-15**Lane Closed****Multi-Lane Divided**

Mobile Operations

Intermittent

Very Short Duration

Short Duration


Long Duration

NOTES

i) Mirror image for Left Lane Closed.
For Left Lane Closed, TC-3, TC-2B or TC-2A, TC-1 are to be repeated appropriately on opposite shoulder where NPRS is 70 km/h or higher.

*The TC-4 sign must be installed at or just beyond the beginning of a lane closure taper.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

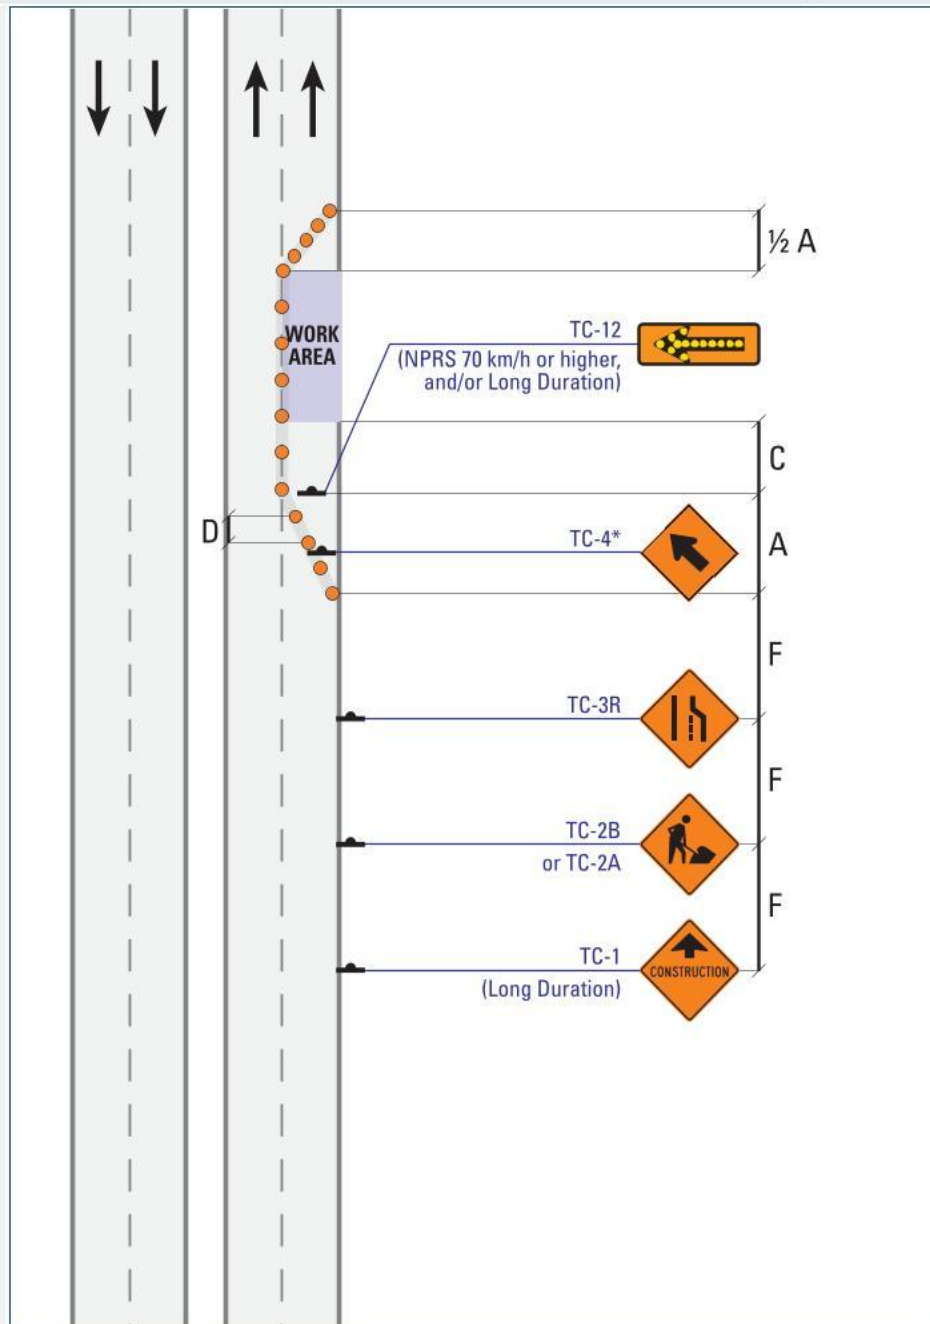

Label	Description	Normal Posted Regulatory Speed (km/h)				
		50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
C	Longitudinal Buffer Area (LBA) (m)	(30)	(40)	50	60	75
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150