

DS-26

Bicycle Lane Diversion: Single File

Multi-Lane Divided

Mobile Operations

Intermittent

Very Short Duration

Short Duration

Long Duration


NOTES

i) AODA-compliant ramps are required if the curb is raised.

ii) Ensure signage is visible for drivers to be aware of merging cyclists.

Shared lane only to be used if considered by OTM Book 18 or MTO Bikeways Design Manual, Desirable Cycling Facility Nomograph. Otherwise, cycling Detour should be provided.

For further detail on Work Zone components, see [Table B \(Short/Long, pg. 241\)](#).

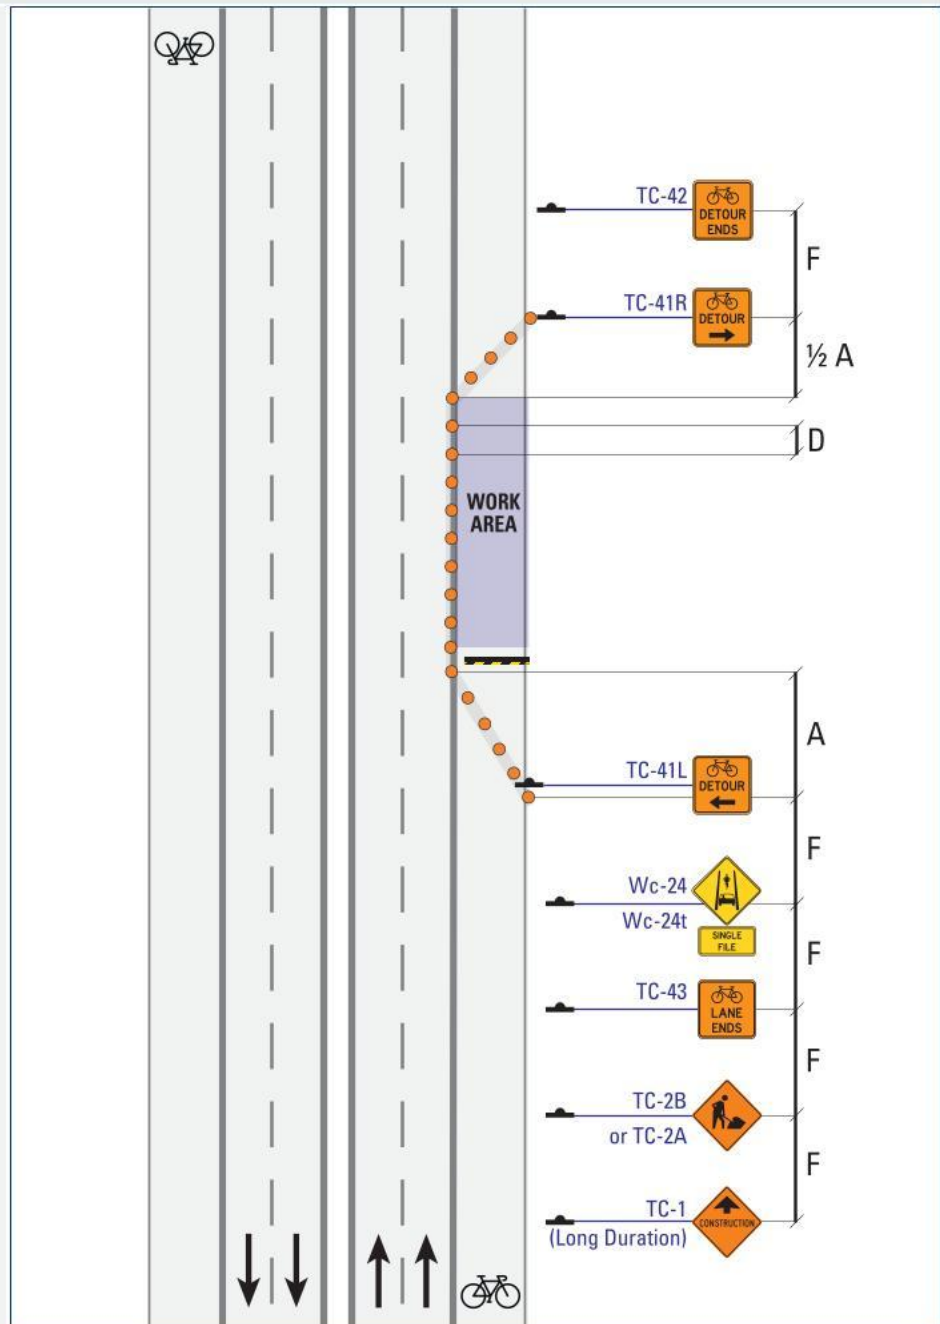

Normal Posted Regulatory Speed (km/h)

Label	Description	50	60	70	80	90
A	Taper Length for Full Lane Closure (m)	60	85	155	180	200
D	Maximum Distance between Markers (m)	6	9	9	12	12
	Minimum Number of Markers for Taper	5	7	9	11	13
F	Distance between Construction Signs (m)	50	90	120	140	150